

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P223031

Luminaire Tested: **LD2B05D010 EU2B05NFL259024 2LBDL*WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P223031
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B05NFL259024 2LBDL*WH
Description: 500 Lumen, 2inch Portfolio LED Downlight
NARROW FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH WHEAT HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 515.0 lumens
Efficiency: N/A
Efficacy: 70.5 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P223031

CATALOG NUMBER: LD2B05D010 EU2B05NFL259024 2LBDL*WH

Luminous Intensity Polar Plot

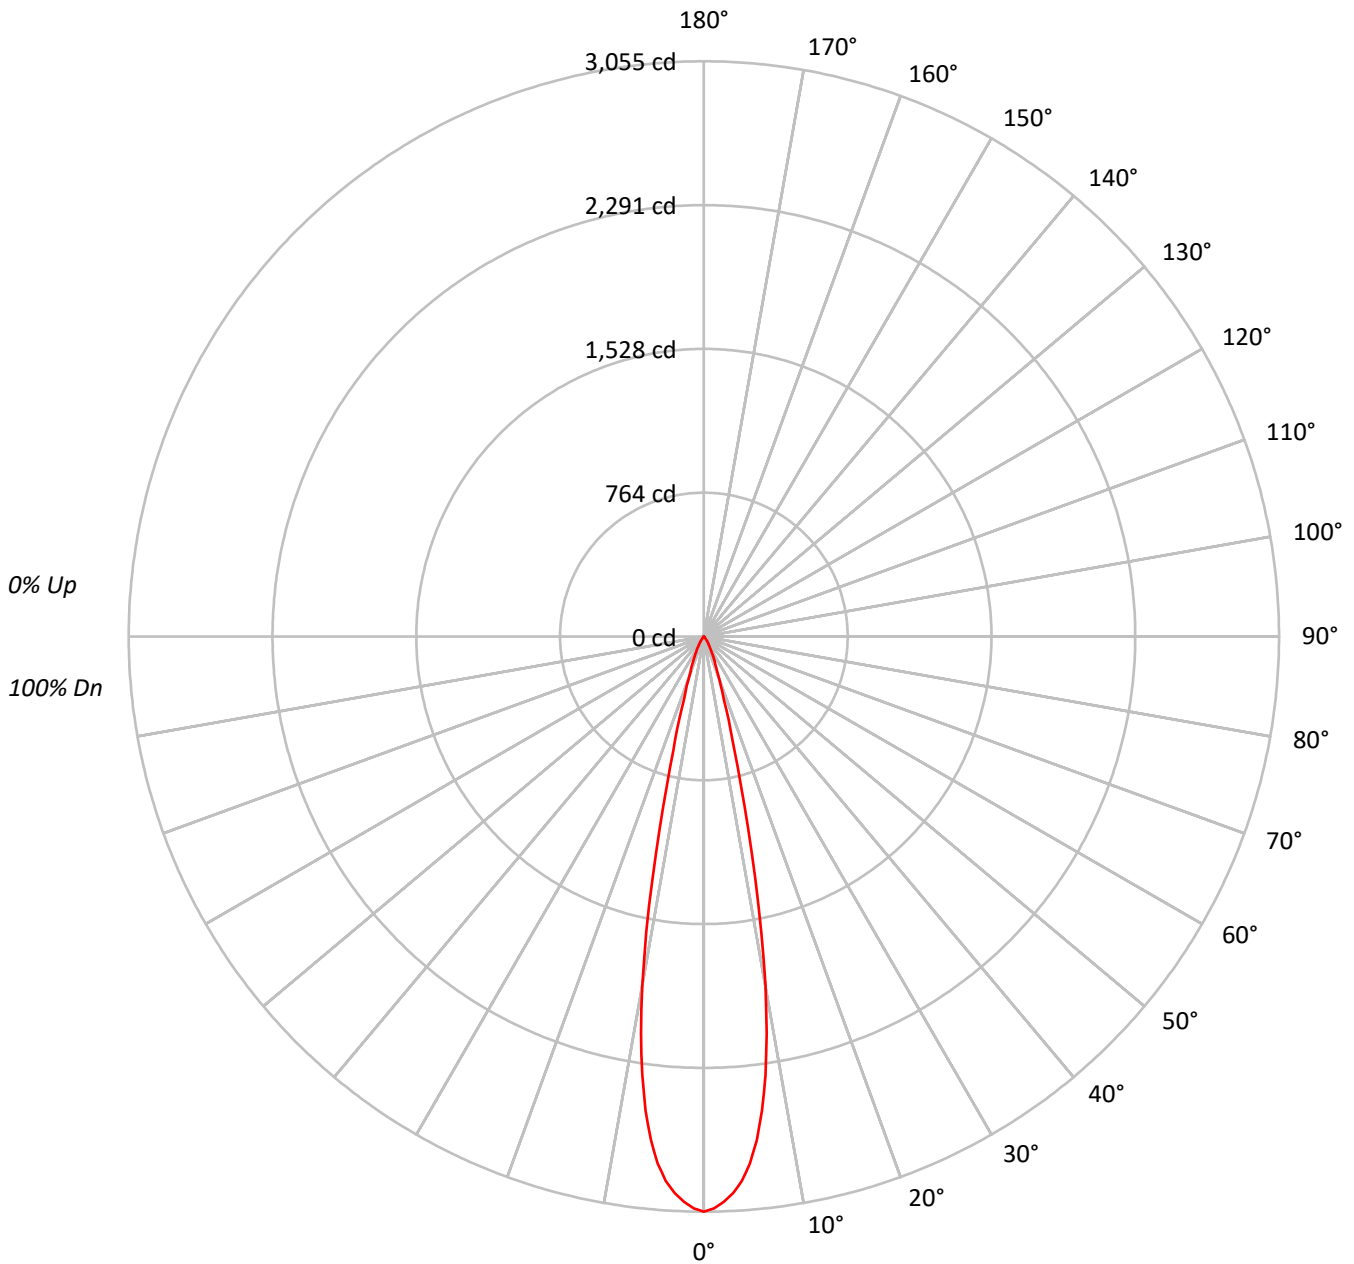



TEST NUMBER: P223031

CATALOG NUMBER: LD2B05D010 EU2B05NFL259024 2LBDL*WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 115 | 113 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99 | 97 | 97 | 97 | 97 |
| 2 | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 104 | 102 | 100 | 101 | 99 | 98 | 98 | 97 | 96 | 95 | 95 | 95 | 95 |
| 3 | 109 | 105 | 101 | 99 | 107 | 103 | 100 | 98 | 101 | 98 | 96 | 99 | 97 | 95 | 96 | 95 | 93 | 92 | 92 | 92 | 92 |
| 4 | 106 | 101 | 97 | 95 | 104 | 100 | 97 | 94 | 98 | 95 | 93 | 96 | 94 | 92 | 95 | 93 | 91 | 90 | 90 | 90 | 90 |
| 5 | 103 | 98 | 94 | 91 | 102 | 97 | 94 | 91 | 95 | 92 | 90 | 94 | 91 | 89 | 93 | 90 | 89 | 88 | 88 | 88 | 88 |
| 6 | 101 | 95 | 91 | 89 | 99 | 94 | 91 | 88 | 93 | 90 | 88 | 92 | 89 | 87 | 91 | 88 | 87 | 86 | 86 | 86 | 86 |
| 7 | 98 | 92 | 89 | 86 | 97 | 92 | 88 | 86 | 91 | 88 | 85 | 90 | 87 | 85 | 89 | 86 | 85 | 84 | 84 | 84 | 84 |
| 8 | 96 | 90 | 86 | 84 | 95 | 90 | 86 | 84 | 89 | 86 | 83 | 88 | 85 | 83 | 87 | 85 | 83 | 82 | 82 | 82 | 82 |
| 9 | 94 | 88 | 84 | 82 | 93 | 88 | 84 | 82 | 87 | 84 | 82 | 86 | 83 | 81 | 85 | 83 | 81 | 80 | 80 | 80 | 80 |
| 10 | 92 | 86 | 82 | 80 | 91 | 86 | 82 | 80 | 85 | 82 | 80 | 84 | 82 | 80 | 84 | 81 | 79 | 79 | 79 | 79 | 79 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1183458 |
| 5° | 1092717 |
| 10° | 739641 |
| 15° | 251634 |
| 20° | 92416 |
| 25° | 48979 |
| 30° | 25181 |
| 35° | 11774 |
| 40° | 3843 |
| 45° | 1972 |
| 50° | 904 |
| 55° | 338 |
| 60° | 387 |
| 65° | 0 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P223031

CATALOG NUMBER: LD2B05D010 EU2B05NFL259024 2LBDL*WH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 239.1 | 46.4 |
| 10°-20° | 201.0 | 39.0 |
| 20°-30° | 55.2 | 10.7 |
| 30°-40° | 16.1 | 3.1 |
| 40°-50° | 3.0 | 0.6 |
| 50°-60° | 0.7 | 0.1 |
| 60°-70° | 0.1 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 495.2 | 96.2 |
| 0°-40° | 511.3 | 99.3 |
| 0°-60° | 514.9 | 100.0 |
| 0°-90° | 515.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 515.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 3055 | |
| 5° | 2810 | 239 |
| 15° | 628 | 201 |
| 25° | 115 | 55 |
| 35° | 25 | 16 |
| 45° | 4 | 3 |
| 55° | 0 | 1 |
| 65° | 0 | 0 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P223031

CATALOG NUMBER: LD2B05D010 EU2B05NFL259024 2LBDL*WH

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 3055.3 |
| 1° | 3037.5 |
| 2° | 3006.1 |
| 3° | 2960.9 |
| 4° | 2899.1 |
| 5° | 2810.3 |
| 6° | 2689.1 |
| 7° | 2537.4 |
| 8° | 2352.2 |
| 9° | 2133.6 |
| 10° | 1880.5 |
| 11° | 1603.0 |
| 12° | 1314.3 |
| 13° | 1038.9 |
| 14° | 804.0 |
| 15° | 627.5 |
| 17.5° | 354.1 |
| 20° | 224.2 |
| 22.5° | 159.8 |
| 25° | 114.6 |
| 27.5° | 81.2 |
| 30° | 56.3 |
| 32.5° | 39.6 |
| 35° | 24.9 |
| 37.5° | 10.1 |
| 40° | 7.6 |
| 42.5° | 5.6 |
| 45° | 3.6 |
| 47.5° | 2.0 |
| 50° | 1.5 |
| 52.5° | 1.0 |
| 55° | 0.5 |
| 57.5° | 0.5 |
| 60° | 0.5 |
| 62.5° | 0.0 |
| 65° | 0.0 |
| 67.5° | 0.0 |
| 70° | 0.0 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |



TEST NUMBER: P223031

CATALOG NUMBER: LD2B05D010 EU2B05NFL259024 2LBDL*WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







| | | |
|-------|--|-----|
| 85° | | 0.0 |
| 87.5° | | 0.0 |



(END OF REPORT)