

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264600

Luminaire Tested: **LD2B05D010 EU2B0510SP158027 2LBSQLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264600
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1711-432-2)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B0510SP158027 2LBSQLC*MMS
Description: 500 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 637.0 lumens
Efficiency: N/A
Efficacy: 87.3 lumens/watt
Spacing Criteria (0/90/45): 0.31 / 0.31 / 0.32
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264600

CATALOG NUMBER: LD2B05D010 EU2B0510SP158027 2LBSQLC*MMS

Luminous Intensity Polar Plot

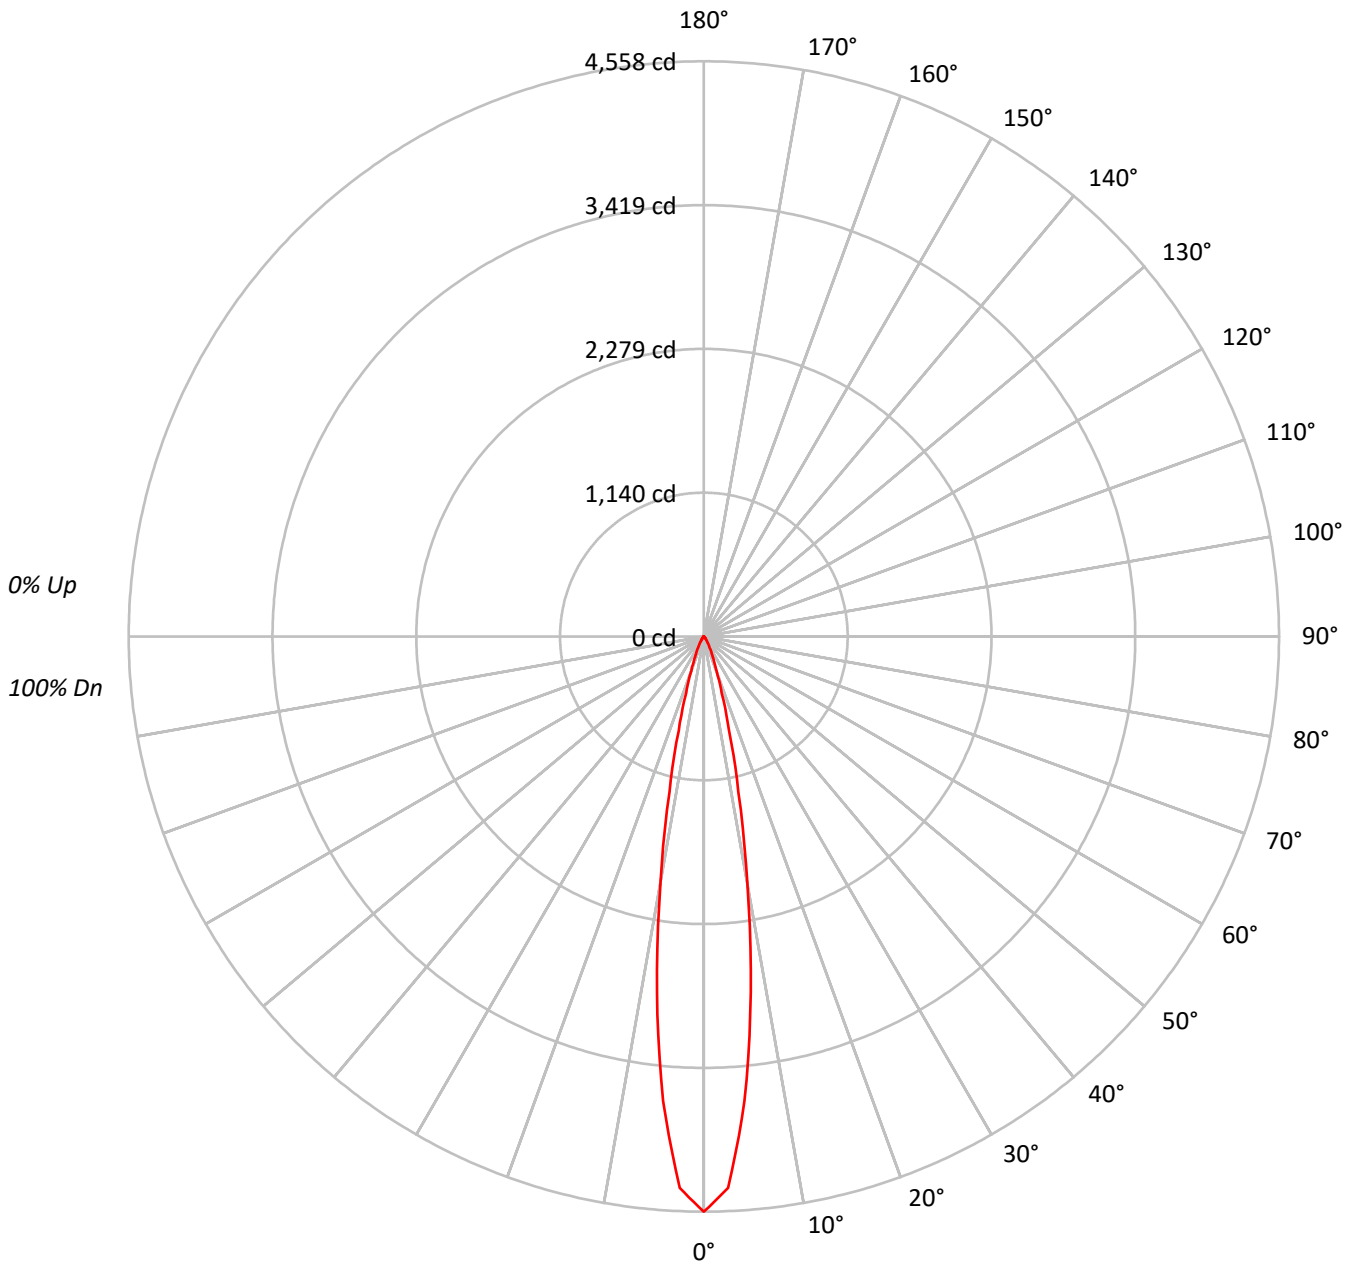



TEST NUMBER: P264600

CATALOG NUMBER: LD2B05D010 EU2B0510SP158027 2LBSQLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83
8	95	89	86	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79
10	91	85	82	79	91	85	81	79	84	81	79	84	81	79	83	80	78	78	78	78	78

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2248743
5°	1830232
10°	988670
15°	394209
20°	158085
25°	75667
30°	39251
35°	20719
40°	11528
45°	7117
50°	4912
55°	3269
60°	2565
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264600

CATALOG NUMBER: LD2B05D010 EU2B0510SP158027 2LBSQLC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	297.2	46.7
10°-20°	234.5	36.8
20°-30°	69.2	10.9
30°-40°	23.0	3.6
40°-50°	8.6	1.4
50°-60°	3.8	0.6
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	600.9	94.3
0°-40°	623.9	97.9
0°-60°	636.4	99.9
0°-90°	637.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	637.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4558	
5°	3696	297
15°	772	234
25°	139	69
35°	34	23
45°	10	9
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264600

CATALOG NUMBER: LD2B05D010 EU2B0510SP158027 2LBSQLC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	4558.0
2.5°	4374.3
5°	3695.6
7.5°	2847.3
10°	1973.5
12.5°	1262.9
15°	771.8
17.5°	470.7
20°	301.1
22.5°	201.6
25°	139.0
27.5°	98.2
30°	68.9
32.5°	48.5
35°	34.4
37.5°	24.2
40°	17.9
42.5°	14.0
45°	10.2
47.5°	8.9
50°	6.4
52.5°	5.1
55°	3.8
57.5°	3.8
60°	2.6
62.5°	1.3
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)