

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B05D010 EU2B05WFL558027 2LBD*B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14809)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B05WFL558027 2LBD*B
Description: 500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 709.0 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBD*B

Luminous Intensity Polar Plot

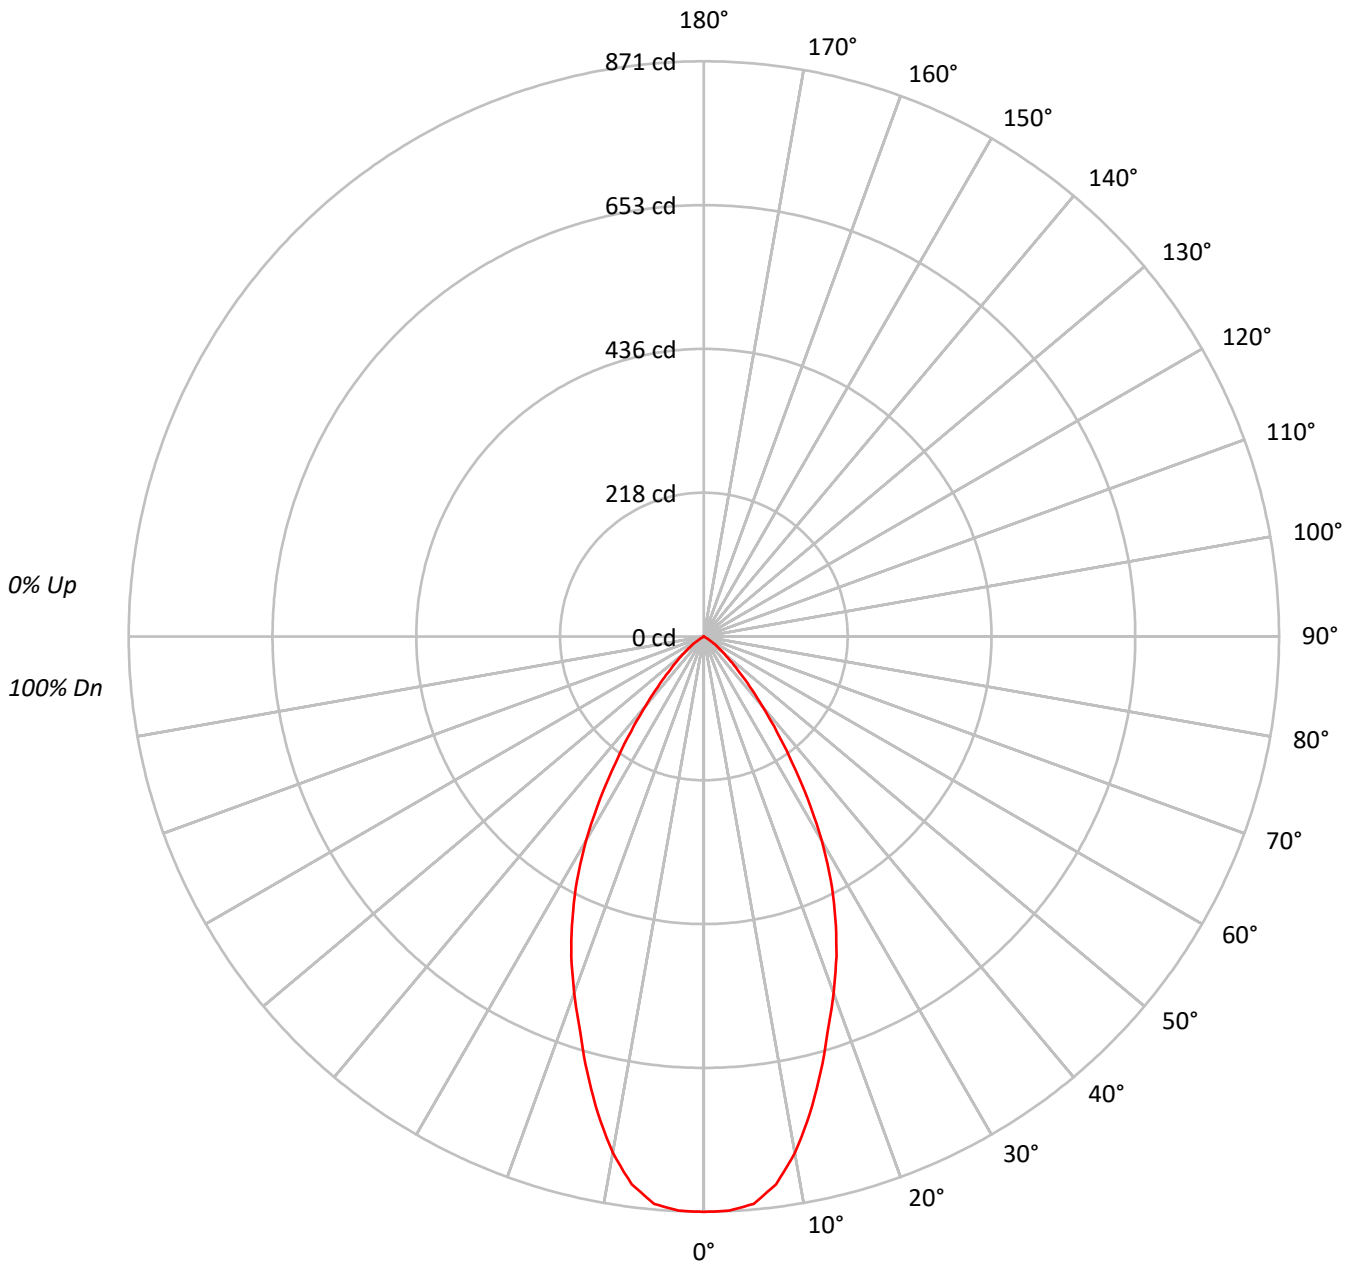



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBD*B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	63	70	66	62	69	65	62	60																			
8	79	69	63	59	78	69	63	59	67	62	59	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53																			
10	71	62	56	52	70	61	56	52	60	55	52	60	55	52	59	55	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	337533
5°	335362
10°	312297
15°	273890
20°	236606
25°	201257
30°	159630
35°	110177
40°	69172
45°	41249
50°	23923
55°	12021
60°	775
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBD*B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.1	11.3
10°-20°	190.4	26.8
20°-30°	214.3	30.2
30°-40°	147.2	20.8
40°-50°	61.1	8.6
50°-60°	15.8	2.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	484.7	68.4
0°-40°	632.0	89.1
0°-60°	708.9	100.0
0°-90°	709.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	709.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	871	
5°	862	80
15°	683	190
25°	471	214
35°	233	147
45°	75	61
55°	18	16
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBD*B

CANDELA DISTRIBUTION (FULL):

	0°
0°	871.4
2.5°	870.4
5°	862.5
7.5°	836.7
10°	794.0
12.5°	740.5
15°	683.0
17.5°	624.5
20°	574.0
22.5°	524.4
25°	470.9
27.5°	416.4
30°	356.9
32.5°	293.4
35°	233.0
37.5°	181.4
40°	136.8
42.5°	103.1
45°	75.3
47.5°	54.5
50°	39.7
52.5°	27.8
55°	17.8
57.5°	5.9
60°	1.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)