

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B05D010 EU2B05WFL558027 2LBDSQLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B05WFL558027 2LBDSQLC*MW
Description: 500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 630.0 lumens
Efficiency: N/A
Efficacy: 86.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#
CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBDSQLC*MW

Luminous Intensity Polar Plot

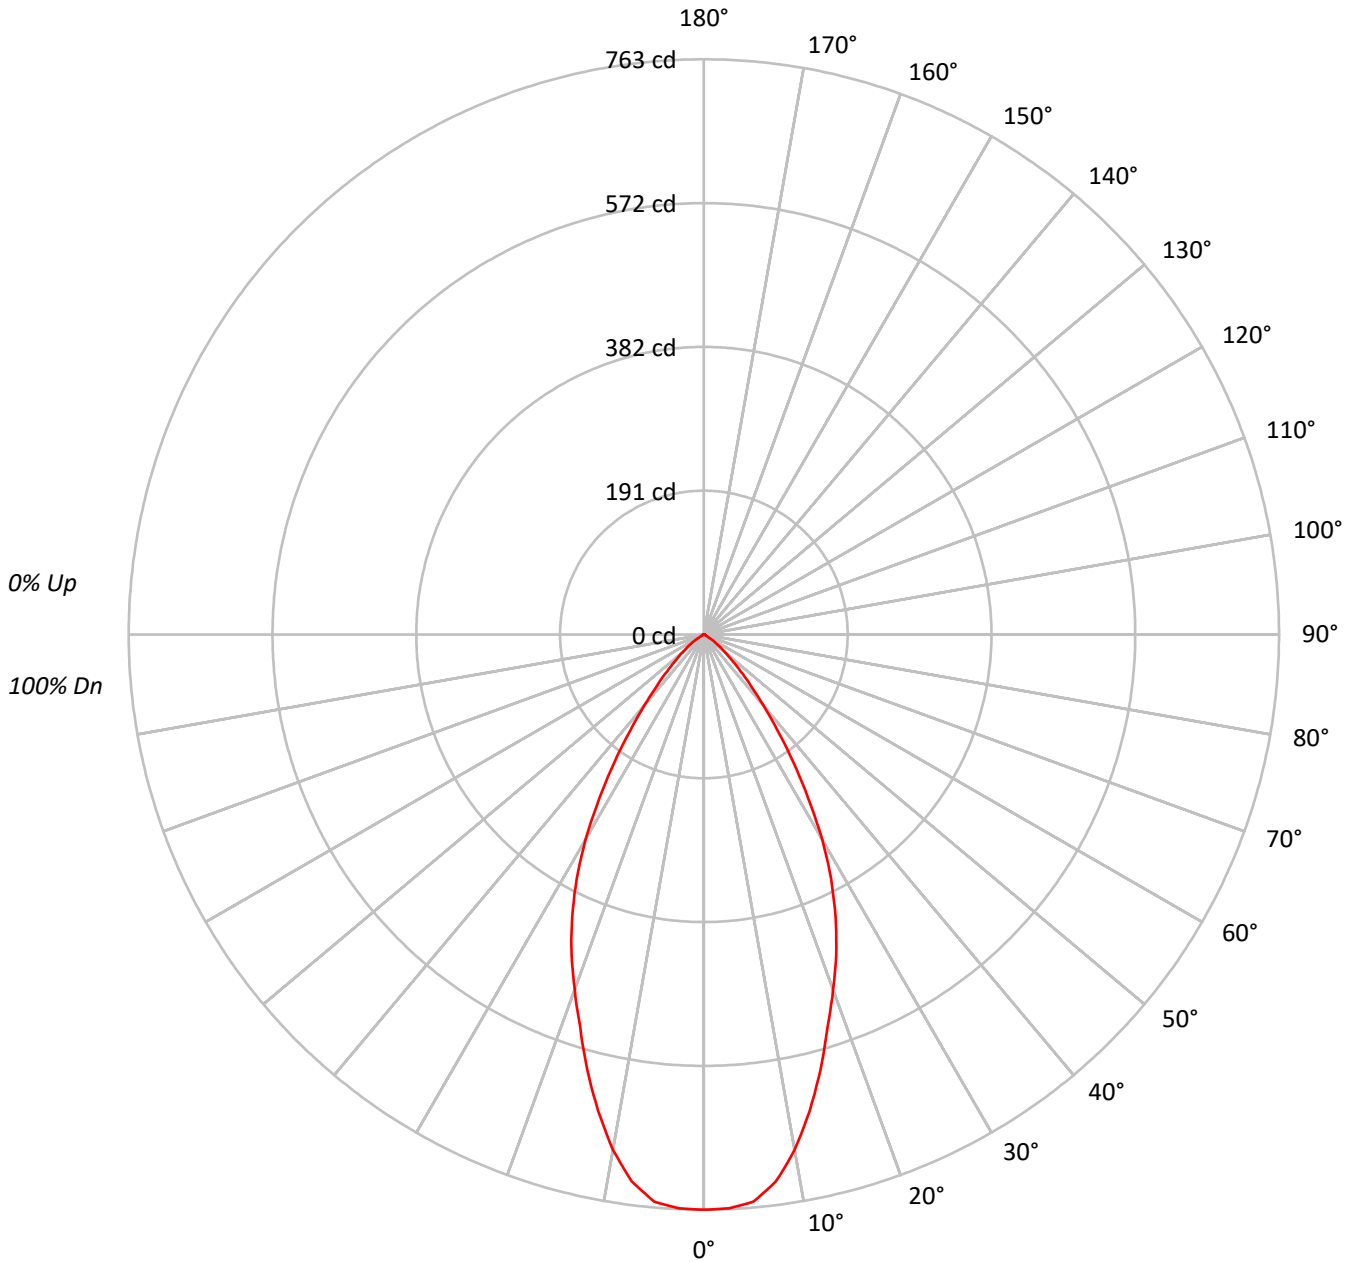



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBDSQLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	295545
5°	293641
10°	273004
15°	239644
20°	206597
25°	176640
30°	140174
35°	97741
40°	61840
45°	37743
50°	22296
55°	12223
60°	2634
65°	2383
70°	1925
75°	2544
80°	2008
85°	4000



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBDSQLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.1	11.1
10°-20°	166.4	26.4
20°-30°	187.8	29.8
30°-40°	129.9	20.6
40°-50°	55.4	8.8
50°-60°	16.0	2.5
60°-70°	2.3	0.4
70°-80°	1.5	0.2
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	424.3	67.3
0°-40°	554.2	88.0
0°-60°	625.6	99.3
0°-90°	630.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	630.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	763	
5°	755	70
15°	598	166
25°	413	188
35°	207	130
45°	69	55
55°	18	16
65°	3	2
75°	2	1
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL558027 2LBDSQLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	763.0
2.5°	762.1
5°	755.2
7.5°	732.0
10°	694.1
12.5°	647.6
15°	597.6
17.5°	545.9
20°	501.2
22.5°	459.0
25°	413.3
27.5°	365.1
30°	313.4
32.5°	257.5
35°	206.7
37.5°	160.2
40°	122.3
42.5°	92.1
45°	68.9
47.5°	49.9
50°	37.0
52.5°	26.7
55°	18.1
57.5°	7.8
60°	3.4
62.5°	2.6
65°	2.6
67.5°	1.7
70°	1.7
72.5°	1.7
75°	1.7
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)