

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264233

Luminaire Tested: **LD2B05D010 EU2B0510SP159027 2LBDC\*MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264233  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B05D010 EU2B0510SP159027 2LBDC\*MMS  
Description: 500 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 532.9 lumens  
Efficiency: N/A  
Efficacy: 73.0 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264233

CATALOG NUMBER: LD2B05D010 EU2B0510SP159027 2LBDC\*MMS

### Luminous Intensity Polar Plot

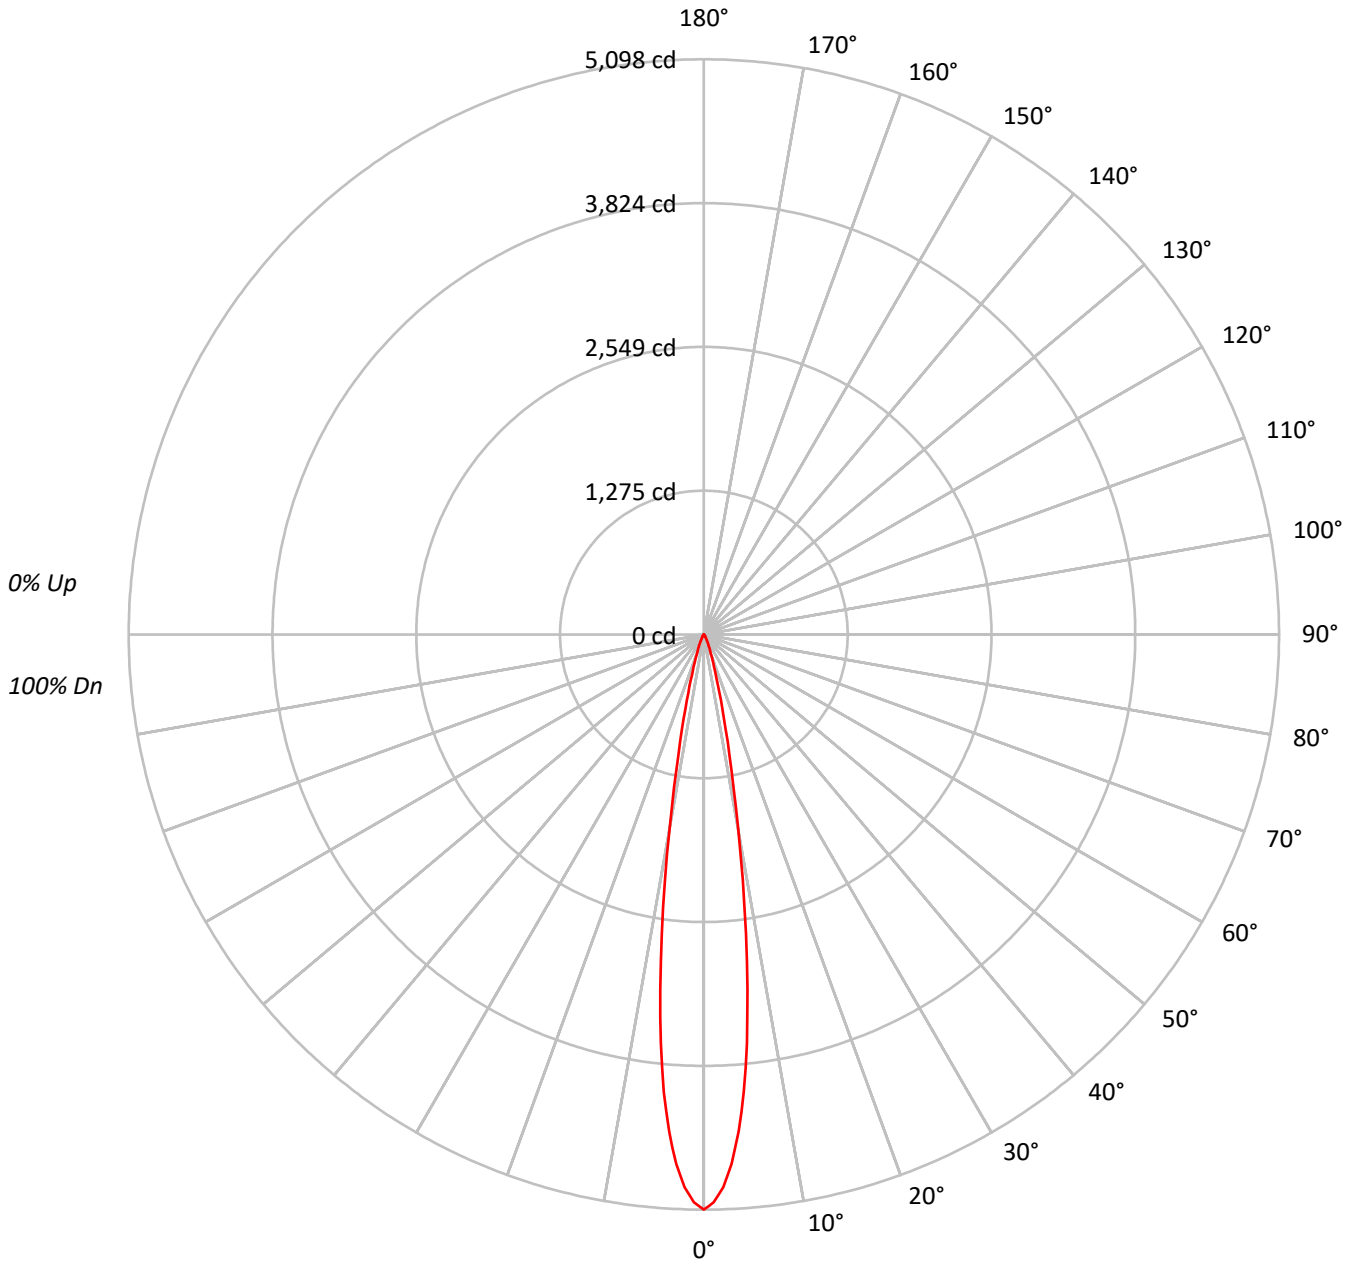



TEST NUMBER: P264233

CATALOG NUMBER: LD2B05D010 EU2B0510SP159027 2LBDC\*MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98				98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96				96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94				94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92				92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90				90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89				89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87				87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86				86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85				85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83				83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2515010
5°	2015900
10°	879858
15°	272647
20°	95029
25°	41971
30°	19027
35°	9877
40°	5668
45°	2651
50°	1689
55°	946
60°	493
65°	584
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264233

CATALOG NUMBER: LD2B05D010 EU2B0510SP159027 2LBDC\*MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	309.1	58.0
10°-20°	169.3	31.8
20°-30°	38.6	7.2
30°-40°	11.1	2.1
40°-50°	3.4	0.6
50°-60°	1.0	0.2
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	517.0	97.0
0°-40°	528.1	99.1
0°-60°	532.5	99.9
0°-90°	532.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	532.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5098	
5°	4070	309
15°	534	169
25°	77	39
35°	16	11
45°	4	3
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264233

CATALOG NUMBER: LD2B05D010 EU2B0510SP159027 2LBDC\*MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5097.7
1°	5034.3
2°	4902.5
3°	4697.9
4°	4416.7
5°	4070.5
6°	3646.1
7°	3171.9
8°	2676.8
9°	2197.7
10°	1756.3
11°	1382.7
12°	1088.5
13°	856.5
14°	676.6
15°	533.8
16°	421.2
17°	335.3
18°	269.7
19°	219.3
20°	181.0
22.5°	117.1
25°	77.1
26°	65.1
27°	55.2
28°	46.5
29°	38.8
30°	33.4
32.5°	23.0
35°	16.4
37.5°	12.0
40°	8.8
42.5°	6.0
45°	3.8
47.5°	2.7
50°	2.2
52.5°	1.6
55°	1.1
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.5



TEST NUMBER: P264233

CATALOG NUMBER: LD2B05D010 EU2B0510SP159027 2LBDC\*MMS

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)