

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B05D010 EU2B05WFL559730 2LBDSQLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B05WFL559730 2LBDSQLC*MW
Description: 500 Lumen, 2inch Portfolio LED Downlight
WIDE FLOOD OPTIC
LENSED SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 474.9 lumens
Efficiency: N/A
Efficacy: 65.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559730 2LBDSQLC*MW

Luminous Intensity Polar Plot

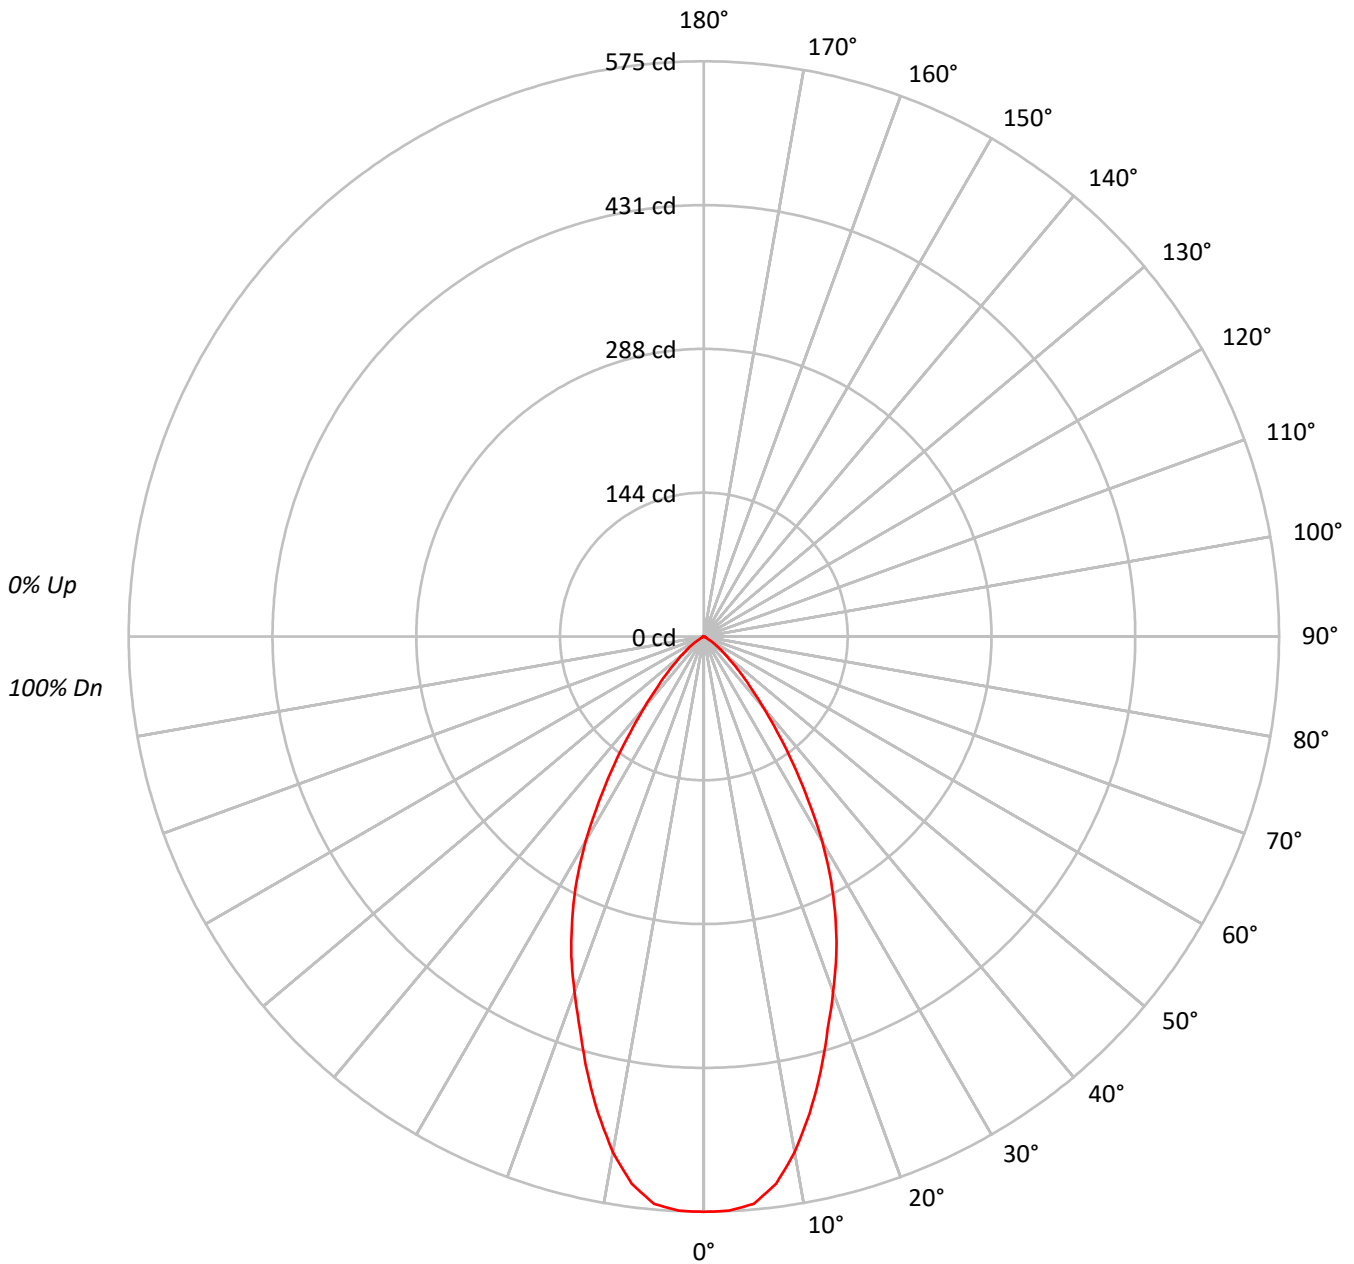



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559730 2LBDSQLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93			
2	108	102	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	87	84	81	80			
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	73	69	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64	61	60			
8	78	69	62	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	74	65	59	55	73	64	58	54	63	58	54	62	57	54	61	57	54	53			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	222801
5°	221397
10°	205825
15°	180695
20°	155772
25°	133174
30°	105690
35°	73672
40°	46620
45°	28430
50°	16813
55°	9184
60°	2014
65°	1741
70°	1472
75°	1946
80°	1338
85°	2667



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559730 2LBDSQLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.8	11.1
10°-20°	125.5	26.4
20°-30°	141.6	29.8
30°-40°	97.9	20.6
40°-50°	41.8	8.8
50°-60°	12.1	2.5
60°-70°	1.7	0.4
70°-80°	1.1	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	319.9	67.4
0°-40°	417.9	88.0
0°-60°	471.7	99.3
0°-90°	474.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	474.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	575	
5°	569	53
15°	451	125
25°	312	142
35°	156	98
45°	52	42
55°	14	12
65°	2	2
75°	1	1
85°	1	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559730 2LBDSQLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	575.2
2.5°	574.6
5°	569.4
7.5°	551.9
10°	523.3
12.5°	488.2
15°	450.6
17.5°	411.6
20°	377.9
22.5°	346.1
25°	311.6
27.5°	275.3
30°	236.3
32.5°	194.1
35°	155.8
37.5°	120.8
40°	92.2
42.5°	69.5
45°	51.9
47.5°	37.7
50°	27.9
52.5°	20.1
55°	13.6
57.5°	5.8
60°	2.6
62.5°	1.9
65°	1.9
67.5°	1.3
70°	1.3
72.5°	1.3
75°	1.3
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)