

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224997

Luminaire Tested: **LD2B05D010 EU2B05FL408035 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224997
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B05FL408035 2LBDL*LI
Description: 500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 733.0 lumens
Efficiency: N/A
Efficacy: 100.4 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224997

CATALOG NUMBER: LD2B05D010 EU2B05FL408035 2LBDL*LI

Luminous Intensity Polar Plot

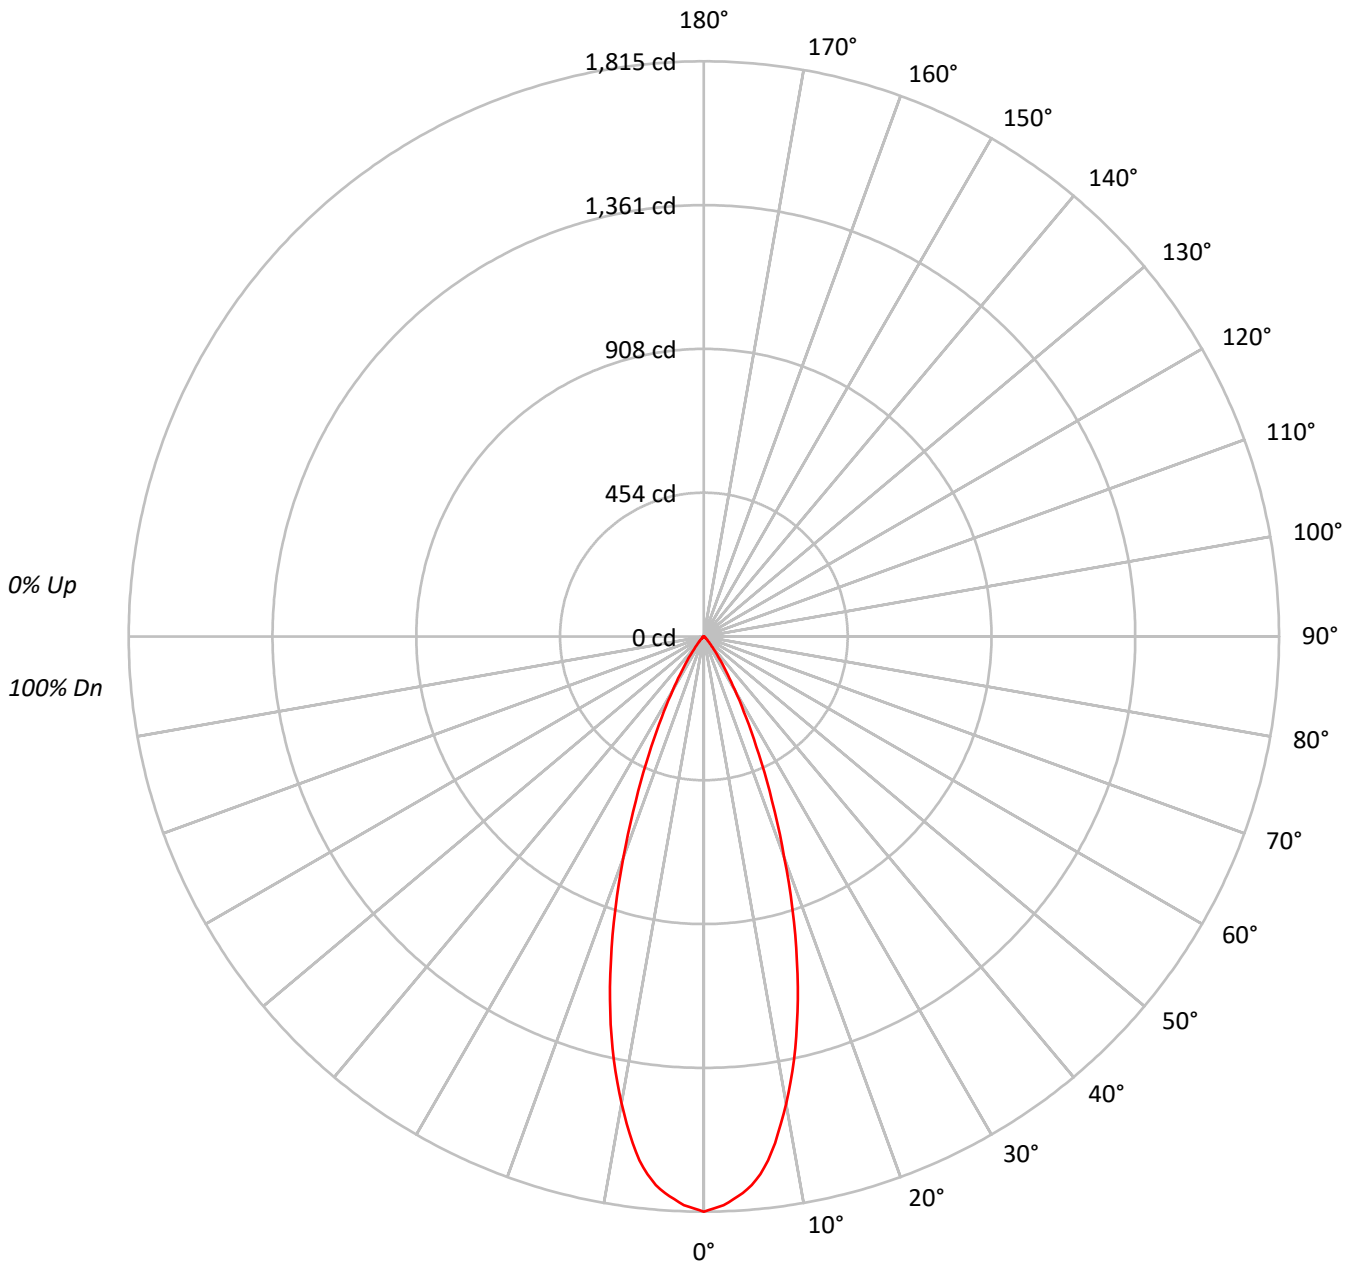



TEST NUMBER: P224997

CATALOG NUMBER: LD2B05D010 EU2B05FL408035 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91	91	91	91
3	106	101	96	93	104	99	95	92	97	94	91	94	92	90	92	90	88	87	87	87	87
4	102	96	91	88	100	95	90	87	93	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	86	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79	79	79	79
6	94	87	82	79	93	86	82	79	85	81	78	84	80	78	83	79	77	76	76	76	76
7	91	83	79	75	90	83	78	75	82	78	75	81	77	74	80	76	74	73	73	73	73
8	88	80	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	70	70	70	70
9	85	77	72	69	84	76	72	69	76	71	69	75	71	68	74	71	68	67	67	67	67
10	82	74	69	66	81	74	69	66	73	69	66	72	68	66	72	68	66	65	65	65	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	703149
5°	675701
10°	588212
15°	459317
20°	305444
25°	174930
30°	86949
35°	39957
40°	16029
45°	7340
50°	3375
55°	1891
60°	1085
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224997

CATALOG NUMBER: LD2B05D010 EU2B05FL408035 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.2	21.6
10°-20°	310.6	42.4
20°-30°	192.2	26.2
30°-40°	57.5	7.8
40°-50°	11.5	1.6
50°-60°	2.8	0.4
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	661.0	90.2
0°-40°	718.5	98.0
0°-60°	732.8	100.0
0°-90°	733.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	733.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1815	
5°	1738	158
15°	1145	311
25°	409	192
35°	84	58
45°	13	12
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224997

CATALOG NUMBER: LD2B05D010 EU2B05FL408035 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1815.3
1°	1805.4
2°	1796.2
3°	1777.9
4°	1761.0
5°	1737.8
6°	1706.1
7°	1665.9
8°	1614.5
9°	1556.0
10°	1495.5
11°	1432.8
12°	1365.9
13°	1296.1
14°	1221.4
15°	1145.4
17.5°	944.6
20°	741.0
22.5°	560.7
25°	409.3
27.5°	287.4
30°	194.4
32.5°	128.2
35°	84.5
37.5°	52.8
40°	31.7
42.5°	20.4
45°	13.4
47.5°	8.5
50°	5.6
52.5°	4.2
55°	2.8
57.5°	2.1
60°	1.4
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224997

CATALOG NUMBER: LD2B05D010 EU2B05FL408035 2LBDL*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)