

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224388

Luminaire Tested: **LD2B05D010 EU2B05FL409035 2LBDSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224388
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B05D010 EU2B05FL409035 2LBDSQC*MW
Description: 500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 642.0 lumens
Efficiency: N/A
Efficacy: 87.9 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224388

CATALOG NUMBER: LD2B05D010 EU2B05FL409035 2LBDSQC*MW

Luminous Intensity Polar Plot

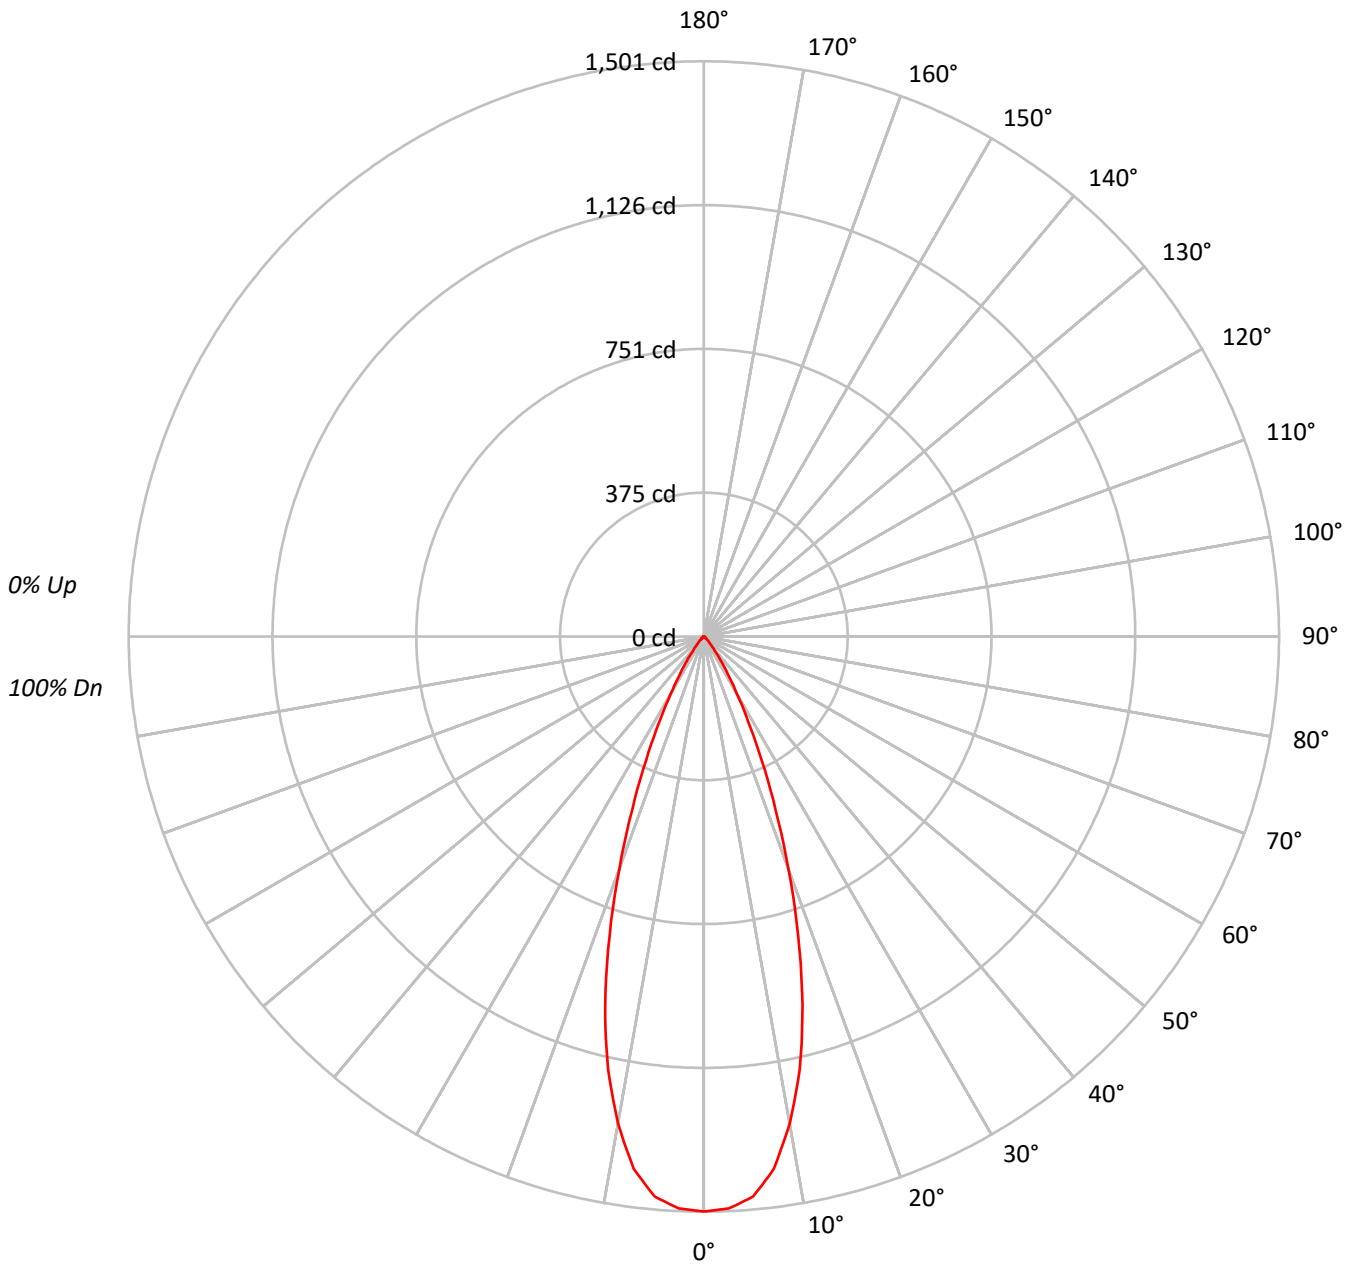



TEST NUMBER: P224388

CATALOG NUMBER: LD2B05D010 EU2B05FL409035 2LBDSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91			91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86			86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	85	88	86	84	82			82
5	98	91	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	79			79
6	94	87	82	78	93	86	81	78	84	80	77	83	80	77	82	79	76	75			75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	76	73	72			72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69			69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66			66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64			64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	581251
5°	570640
10°	507267
15°	398965
20°	265460
25°	152407
30°	76975
35°	36221
40°	14563
45°	7231
50°	3977
55°	2769
60°	2556
65°	1466
70°	1812
75°	1197
80°	1785
85°	0



TEST NUMBER: P224388

CATALOG NUMBER: LD2B05D010 EU2B05FL409035 2LBDSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.4	20.9
10°-20°	269.5	42.0
20°-30°	167.7	26.1
30°-40°	51.5	8.0
40°-50°	11.3	1.8
50°-60°	4.0	0.6
60°-70°	2.0	0.3
70°-80°	1.2	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	571.6	89.0
0°-40°	623.1	97.1
0°-60°	638.5	99.5
0°-90°	642.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	642.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1501	
5°	1468	134
15°	995	269
25°	357	168
35°	77	52
45°	13	11
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P224388

CATALOG NUMBER: LD2B05D010 EU2B05FL409035 2LBDSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1500.6
2.5°	1494.0
5°	1467.6
7.5°	1400.9
10°	1289.7
12.5°	1156.3
15°	994.9
17.5°	818.6
20°	644.0
22.5°	488.4
25°	356.6
27.5°	251.2
30°	172.1
32.5°	116.1
35°	76.6
37.5°	46.1
40°	28.8
42.5°	19.8
45°	13.2
47.5°	9.1
50°	6.6
52.5°	5.8
55°	4.1
57.5°	3.3
60°	3.3
62.5°	2.5
65°	1.6
67.5°	1.6
70°	1.6
72.5°	1.6
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)