

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264072

Luminaire Tested: **LD2B05D010 EU2B0510SP158040 2LBD\*WH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P264072  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B05D010 EU2B0510SP158040 2LBD\*WH  
Description: 500 Lumen, 2inch Portfolio LED Downlight  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 760.1 lumens  
Efficiency: N/A  
Efficacy: 104.1 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P264072

CATALOG NUMBER: LD2B05D010 EU2B0510SP158040 2LBD\*WH

### Luminous Intensity Polar Plot

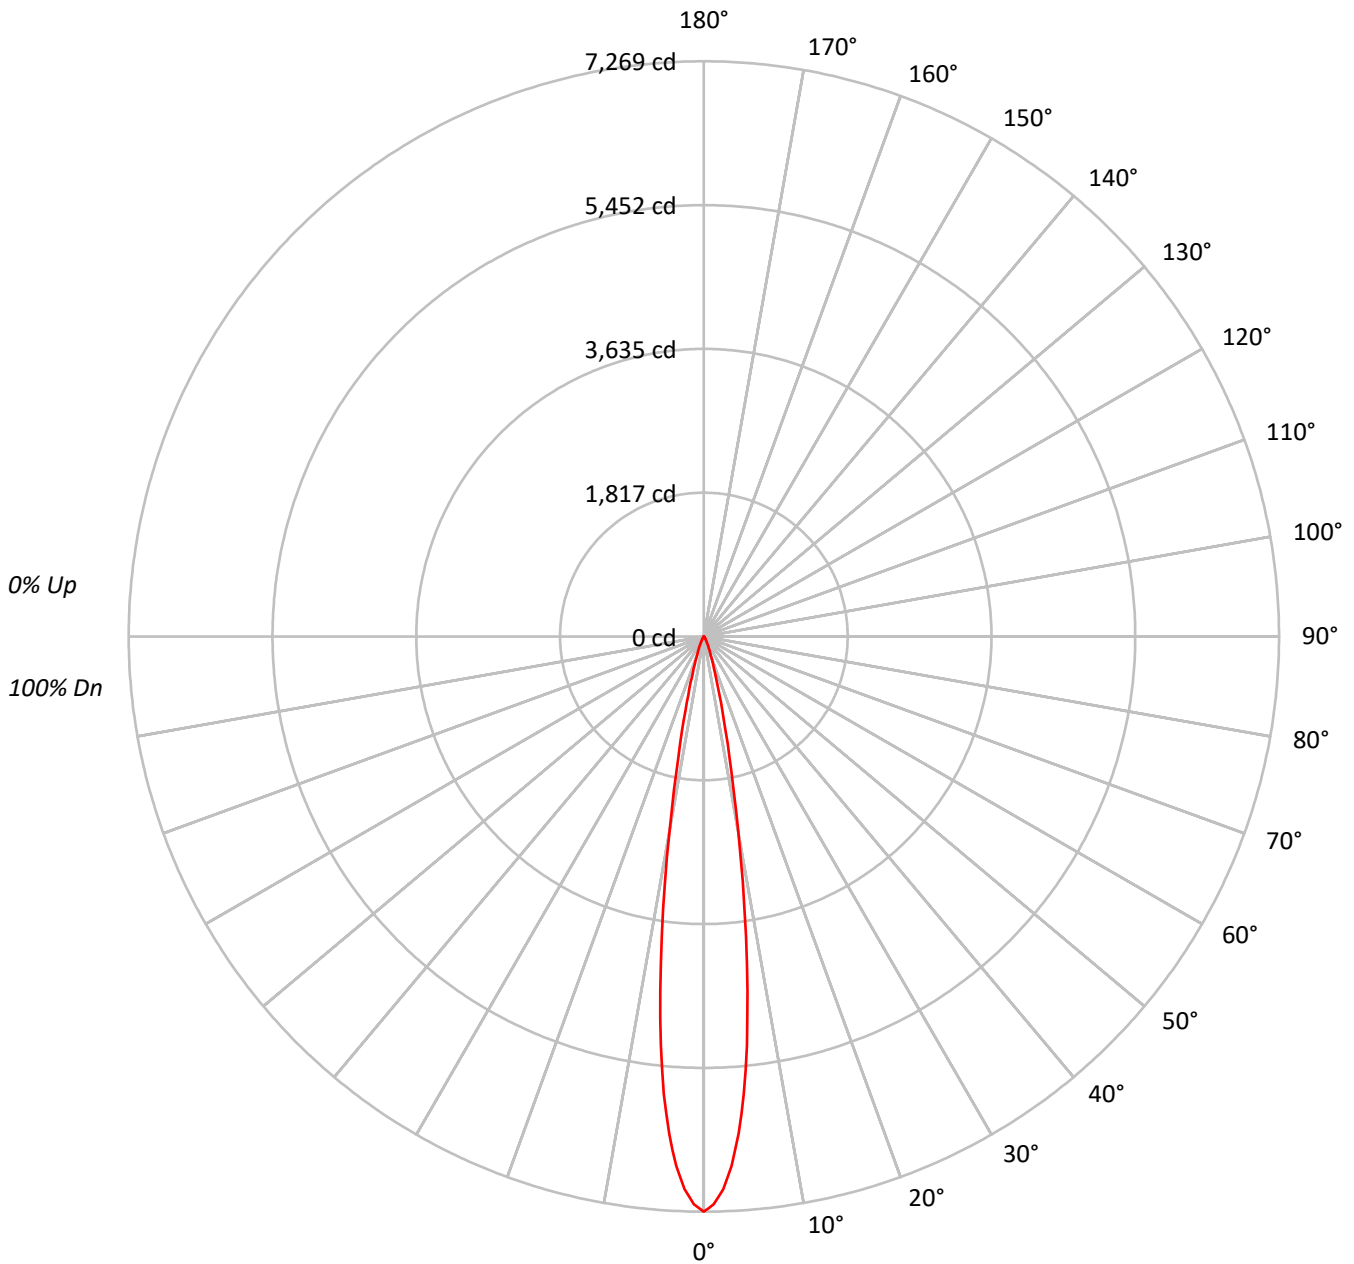



TEST NUMBER: P264072

CATALOG NUMBER: LD2B05D010 EU2B0510SP158040 2LBD\*WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98				98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96				96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94				94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92				92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	90				90
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89				89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87				87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86				86
9	97	92	88	86	96	91	88	86	91	88	86	90	87	86	89	87	85	85				85
10	95	90	87	85	95	90	87	85	89	86	85	89	86	84	88	86	84	83				83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3586148
5°	2874459
10°	1254586
15°	388795
20°	135561
25°	59880
30°	27117
35°	14093
40°	8050
45°	3837
50°	2379
55°	1376
60°	789
65°	934
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264072

CATALOG NUMBER: LD2B05D010 EU2B0510SP158040 2LBD\*WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	440.8	58.0
10°-20°	241.4	31.8
20°-30°	55.0	7.2
30°-40°	15.8	2.1
40°-50°	4.9	0.6
50°-60°	1.5	0.2
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	737.2	97.0
0°-40°	753.0	99.1
0°-60°	759.4	99.9
0°-90°	760.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	760.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7269	
5°	5804	441
15°	761	241
25°	110	55
35°	23	16
45°	6	5
55°	2	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264072

CATALOG NUMBER: LD2B05D010 EU2B0510SP158040 2LBD\*WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7268.8
1°	7178.3
2°	6990.4
3°	6698.7
4°	6297.8
5°	5804.1
6°	5198.9
7°	4522.7
8°	3816.9
9°	3133.7
10°	2504.3
11°	1971.6
12°	1552.0
13°	1221.3
14°	964.8
15°	761.2
16°	600.5
17°	478.1
18°	384.5
19°	312.7
20°	258.2
22.5°	166.9
25°	110.0
26°	92.8
27°	78.8
28°	66.3
29°	55.4
30°	47.6
32.5°	32.8
35°	23.4
37.5°	17.2
40°	12.5
42.5°	8.6
45°	5.5
47.5°	3.9
50°	3.1
52.5°	2.3
55°	1.6
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.8
67.5°	0.8



TEST NUMBER: P264072

CATALOG NUMBER: LD2B05D010 EU2B0510SP158040 2LBD\*WH

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°		0.0
72.5°		0.0



(END OF REPORT)