

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B05D010 EU2B05WFL559040 2LBDSQC\*MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B05D010 EU2B05WFL559040 2LBDSQC\*MW  
Description: 500 Lumen, 2inch Portfolio LED Downlight  
WIDE FLOOD OPTIC  
SQUARE CAST TRIM WITH MATTE WHITE FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 598.0 lumens  
Efficiency: N/A  
Efficacy: 81.9 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559040 2LBDSQC\*MW

### Luminous Intensity Polar Plot

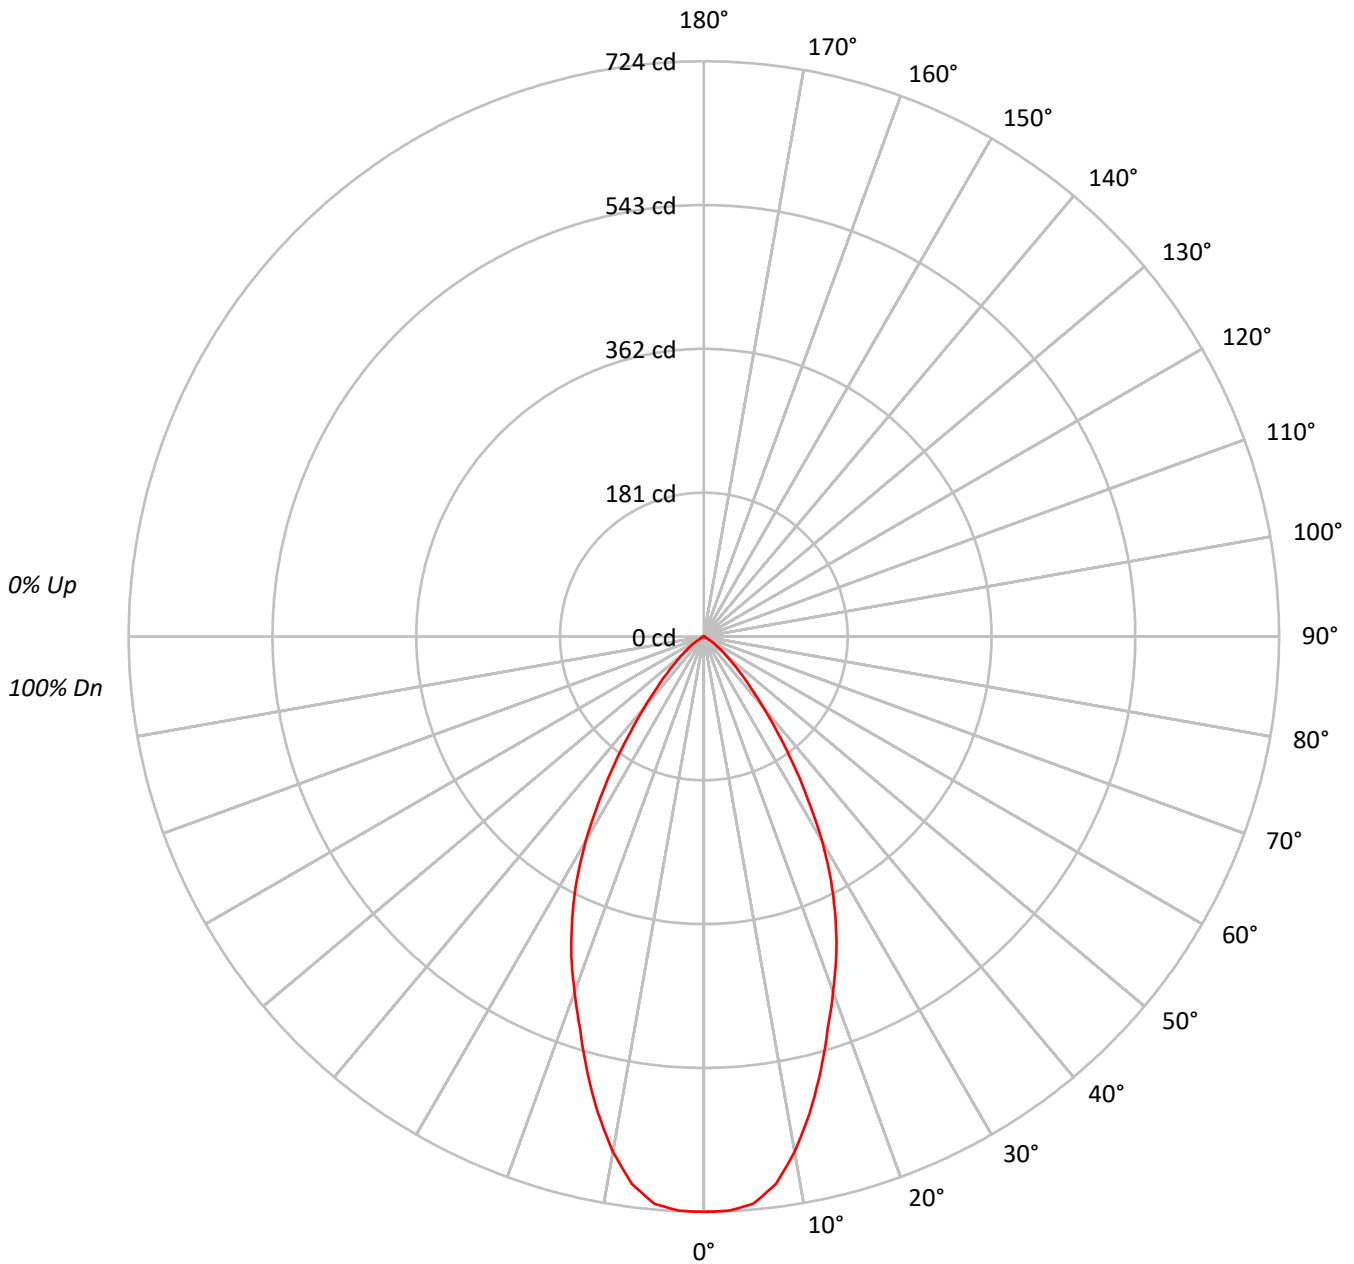



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559040 2LBDSQC\*MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 113 | 110 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 102 | 101 | 101 | 99  | 98  | 97  | 96  | 95  | 93  |    |    |   |
| 2   | 108 | 102 | 98  | 95  | 105 | 101 | 97  | 94  | 98  | 94  | 92  | 95  | 92  | 90  | 92  | 90  | 88  | 86  |    |    |   |
| 3   | 102 | 95  | 90  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 84  | 89  | 85  | 83  | 87  | 84  | 81  | 80  |    |    |   |
| 4   | 97  | 89  | 83  | 79  | 95  | 88  | 82  | 78  | 85  | 81  | 77  | 83  | 80  | 76  | 82  | 78  | 76  | 74  |    |    |   |
| 5   | 91  | 83  | 77  | 72  | 90  | 82  | 76  | 72  | 80  | 75  | 71  | 78  | 74  | 71  | 77  | 73  | 70  | 69  |    |    |   |
| 6   | 87  | 78  | 71  | 67  | 85  | 77  | 71  | 67  | 75  | 70  | 66  | 74  | 69  | 66  | 73  | 69  | 65  | 64  |    |    |   |
| 7   | 82  | 73  | 67  | 62  | 81  | 72  | 66  | 62  | 71  | 66  | 62  | 70  | 65  | 62  | 69  | 64  | 61  | 60  |    |    |   |
| 8   | 78  | 69  | 62  | 58  | 77  | 68  | 62  | 58  | 67  | 62  | 58  | 66  | 61  | 58  | 65  | 61  | 57  | 56  |    |    |   |
| 9   | 74  | 65  | 59  | 55  | 73  | 64  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 61  | 57  | 54  | 53  |    |    |   |
| 10  | 71  | 61  | 55  | 51  | 70  | 61  | 55  | 51  | 60  | 55  | 51  | 59  | 54  | 51  | 58  | 54  | 51  | 49  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 280516 |
| 5°  | 278710 |
| 10° | 259120 |
| 15° | 227493 |
| 20° | 196086 |
| 25° | 167665 |
| 30° | 133062 |
| 35° | 92776  |
| 40° | 58705  |
| 45° | 35825  |
| 50° | 21151  |
| 55° | 11615  |
| 60° | 2556   |
| 65° | 2291   |
| 70° | 1812   |
| 75° | 2395   |
| 80° | 1785   |
| 85° | 3555   |



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559040 2LBDSQC\*MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 66.5   | 11.1      |
| 10°-20°   | 158.0  | 26.4      |
| 20°-30°   | 178.2  | 29.8      |
| 30°-40°   | 123.3  | 20.6      |
| 40°-50°   | 52.6   | 8.8       |
| 50°-60°   | 15.2   | 2.5       |
| 60°-70°   | 2.2    | 0.4       |
| 70°-80°   | 1.4    | 0.2       |
| 80°-90°   | 0.5    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 402.8  | 67.4      |
| 0°-40°    | 526.1  | 88.0      |
| 0°-60°    | 593.8  | 99.3      |
| 0°-90°    | 598.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 598.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 724 |      |
| 5°  | 717 | 67   |
| 15° | 567 | 158  |
| 25° | 392 | 178  |
| 35° | 196 | 123  |
| 45° | 65  | 53   |
| 55° | 17  | 15   |
| 65° | 2   | 2    |
| 75° | 2   | 1    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B05WFL559040 2LBDSQC\*MW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 724.2 |
| 2.5°  | 723.4 |
| 5°    | 716.8 |
| 7.5°  | 694.8 |
| 10°   | 658.8 |
| 12.5° | 614.7 |
| 15°   | 567.3 |
| 17.5° | 518.2 |
| 20°   | 475.7 |
| 22.5° | 435.7 |
| 25°   | 392.3 |
| 27.5° | 346.6 |
| 30°   | 297.5 |
| 32.5° | 244.4 |
| 35°   | 196.2 |
| 37.5° | 152.0 |
| 40°   | 116.1 |
| 42.5° | 87.5  |
| 45°   | 65.4  |
| 47.5° | 47.4  |
| 50°   | 35.1  |
| 52.5° | 25.3  |
| 55°   | 17.2  |
| 57.5° | 7.4   |
| 60°   | 3.3   |
| 62.5° | 2.5   |
| 65°   | 2.5   |
| 67.5° | 1.6   |
| 70°   | 1.6   |
| 72.5° | 1.6   |
| 75°   | 1.6   |
| 77.5° | 0.8   |
| 80°   | 0.8   |
| 82.5° | 0.8   |
| 85°   | 0.8   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)