

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LD2B05D010 EU2B0510NFL258050 2LBPIN**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14816)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD2B05D010 EU2B0510NFL258050 2LBPIN  
Description: 500 Lumen, 2inch Portfolio LED Downlight  
NARROW FLOOD OPTIC  
ROUND PINHOLE BLACK OCULUS  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 629.8 lumens  
Efficiency: N/A  
Efficacy: 86.3 lumens/watt  
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P#  
CATALOG NUMBER: LD2B05D010 EU2B0510NFL258050 2LBPIN

### Luminous Intensity Polar Plot

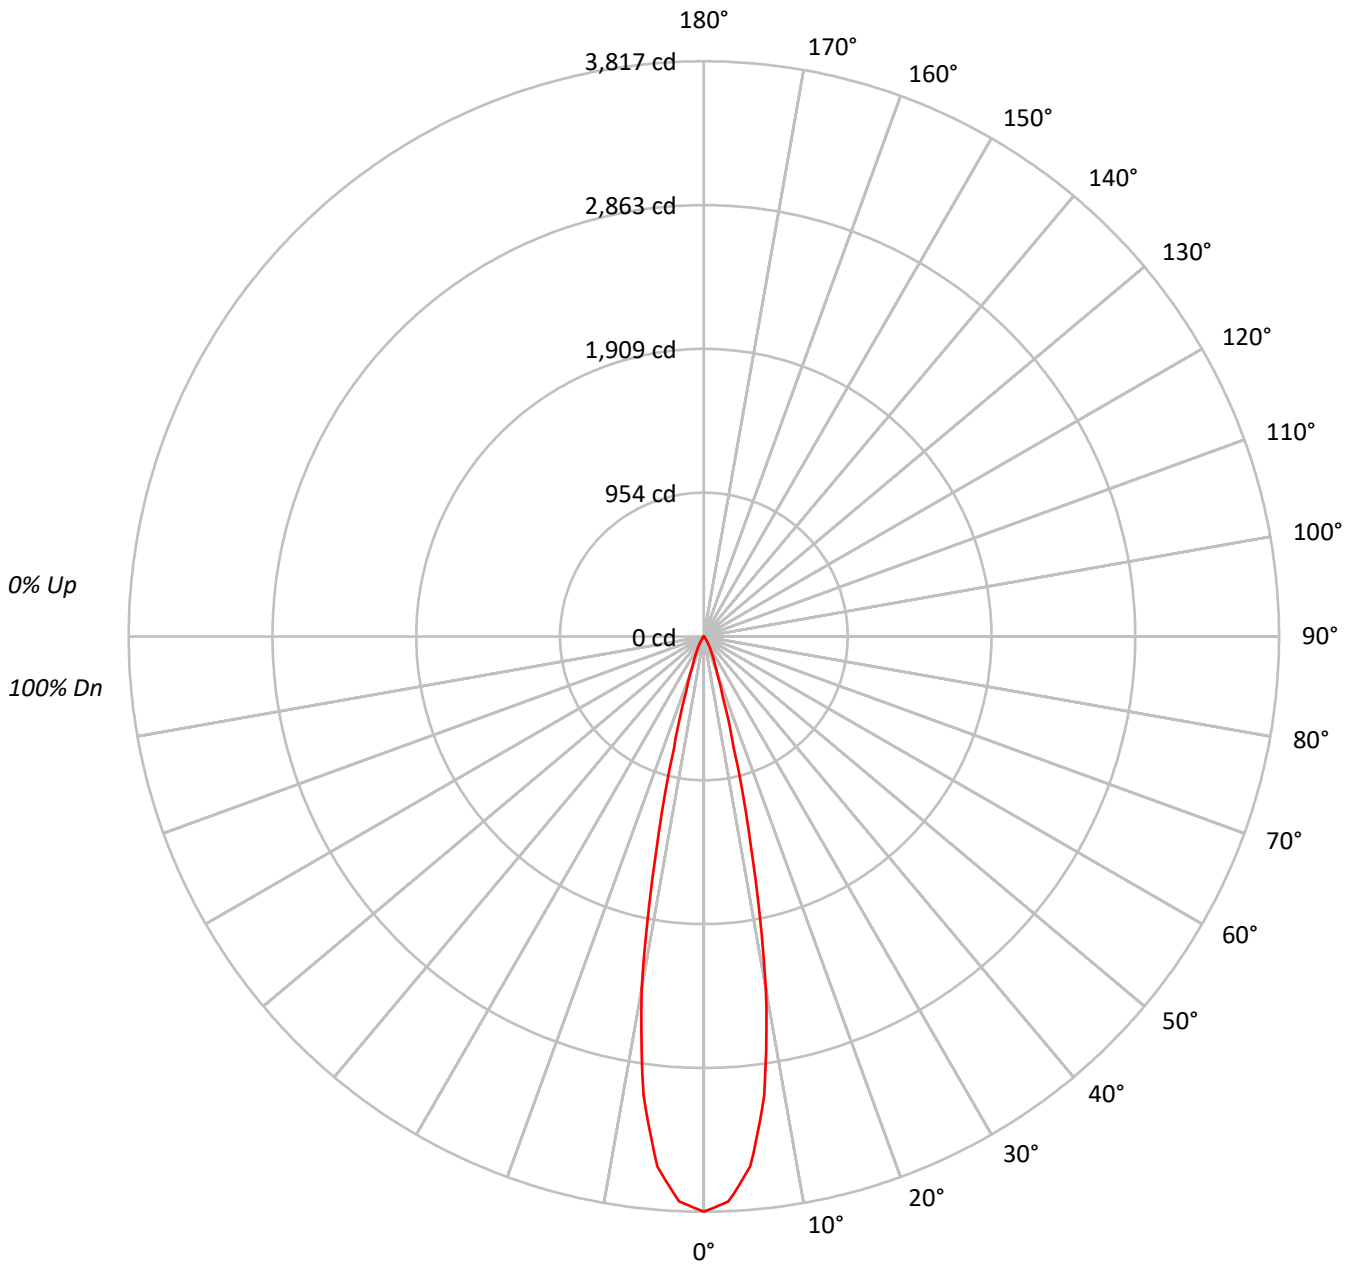



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B0510NFL258050 2LBPIN

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	96	95
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95	94	94	93
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	92	92	90
4	106	101	98	95	105	100	97	95	98	96	94	97	94	93	95	93	92	90	89	89	88
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	89	88	87	87	86
6	101	96	92	89	100	95	91	89	94	91	88	92	90	88	91	89	87	86	85	85	85
7	99	93	89	87	98	93	89	87	92	88	86	91	88	86	90	87	85	84	84	84	83
8	97	91	87	85	96	90	87	85	90	86	84	89	86	84	88	85	84	83	83	83	83
9	95	89	85	83	94	88	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
10	93	87	83	81	92	87	83	81	86	83	81	85	83	81	85	82	80	80	80	80	80

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1478954
5°	1373399
10°	933452
15°	308809
20°	104903
25°	53144
30°	27427
35°	9035
40°	3338
45°	1808
50°	482
55°	540
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B0510NFL258050 2LBPIN

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	299.9	47.6
10°-20°	250.6	39.8
20°-30°	60.6	9.6
30°-40°	15.7	2.5
40°-50°	2.6	0.4
50°-60°	0.4	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	611.2	97.0
0°-40°	626.8	99.5
0°-60°	629.8	100.0
0°-90°	629.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	629.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3817	
5°	3531	300
15°	770	251
25°	124	61
35°	19	16
45°	3	3
55°	1	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD2B05D010 EU2B0510NFL258050 2LBPIN

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3816.8
2.5°	3753.0
5°	3530.9
7.5°	3071.0
10°	2372.4
12.5°	1467.6
15°	769.8
17.5°	416.0
20°	254.4
22.5°	175.7
25°	124.3
27.5°	87.8
30°	61.3
32.5°	43.1
35°	19.1
37.5°	8.3
40°	6.6
42.5°	5.0
45°	3.3
47.5°	1.7
50°	0.8
52.5°	0.8
55°	0.8
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)