

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P494448

Luminaire Tested: **LDA2B108027R30D010 2LBDLC1MW-30DEG TILT**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P494448
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-15)
Test Lab: INNOVATION CENTER
Issue Date: 3/8/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B108027R30D010 2LBDLC1MW-30DEG TILT
Description: 1000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 2700K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 714.9 lumens
Efficiency: N/A
Efficacy: 71.5 lumens/watt
Spacing Criteria (0/90/45): 3.2 / 0.53 / 1.4
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P494448

CATALOG NUMBER: LDA2B108027R30D010 2LBDLC1MW-30DEG TILT

Luminous Intensity Polar Plot

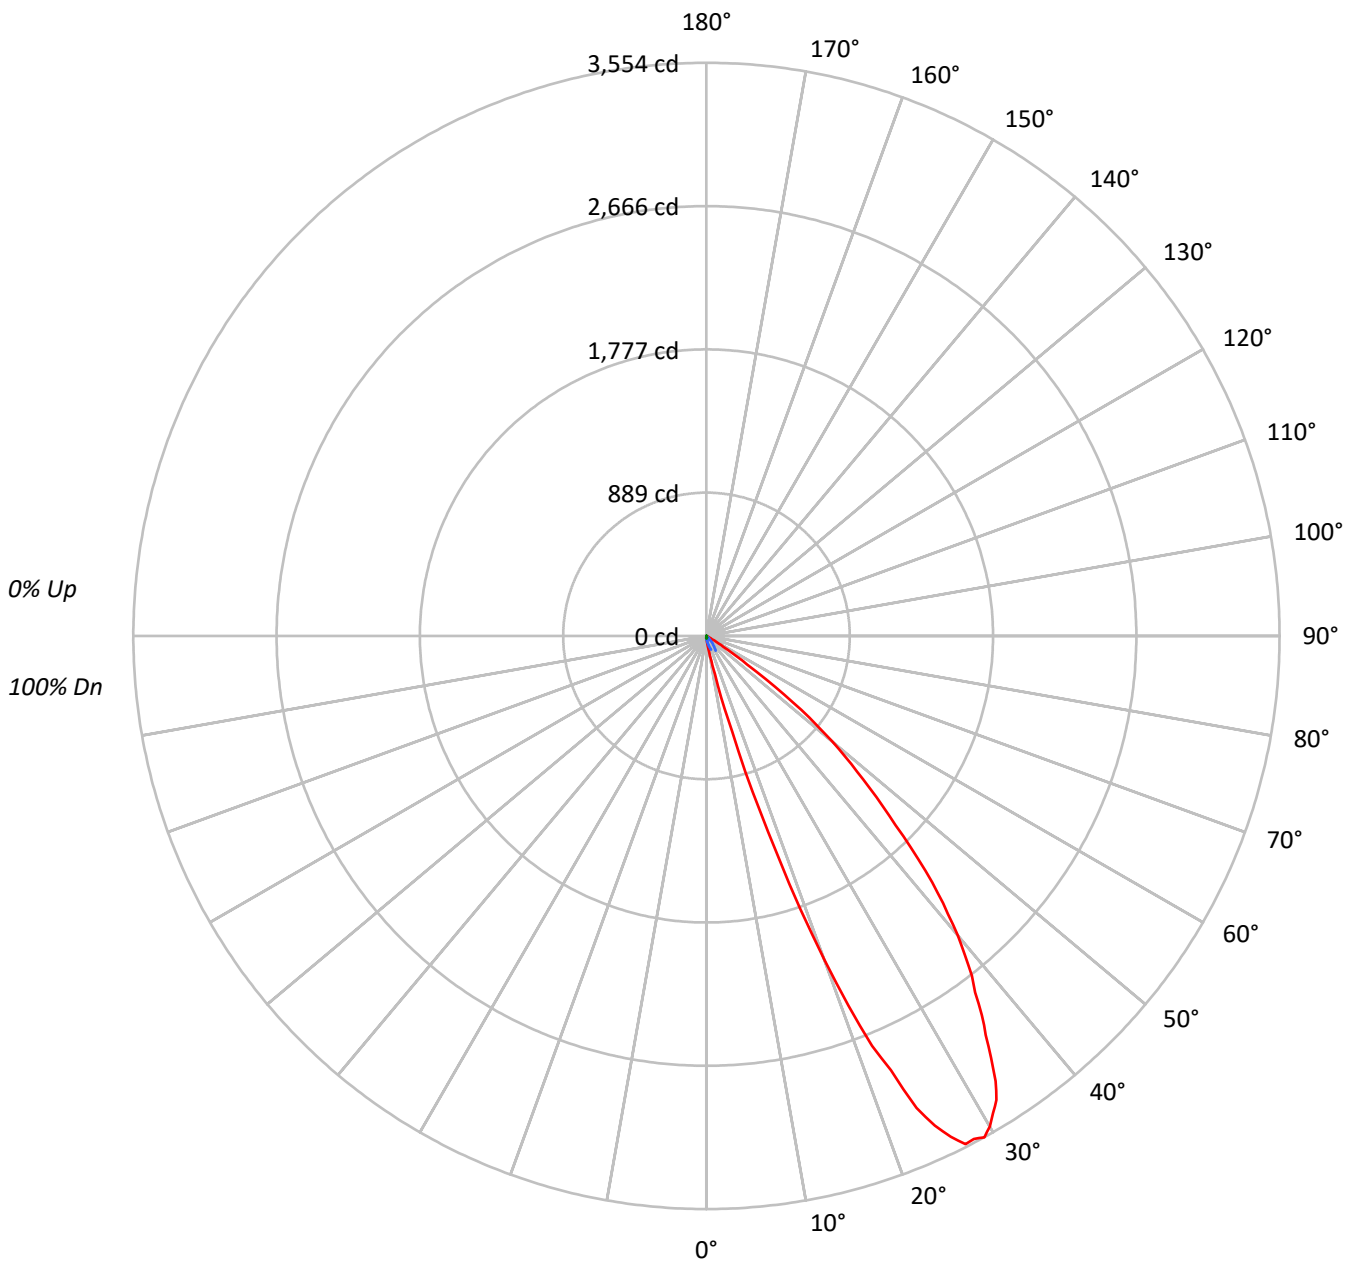

0% Up
100% Dn

— 0°-180° - - 45°-225° - - - 90°-270°



TEST NUMBER: P494448

CATALOG NUMBER: LDA2B108027R30D010 2LBDLC1MW-30DEG TILT

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	109	106	103	109	106	104	101	102	100	98	98	97	95	95	94	92					90				
2	104	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82					80				
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73					71				
4	90	80	73	68	88	79	72	67	77	71	66	75	70	66	73	68	65					63				
5	83	73	65	60	82	72	65	59	70	63	59	68	62	58	66	61	58					56				
6	77	66	58	52	76	65	58	52	63	57	52	62	56	51	60	55	51					49				
7	72	60	52	46	70	59	51	46	57	51	46	56	50	46	55	49	45					44				
8	66	54	46	41	65	54	46	41	52	46	41	51	45	41	50	45	40					39				
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36					34				
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32					31				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°
0°	7943	7943	7943
5°	17185	7181	5151
10°	51650	6212	3357
15°	313457	4495	2656
20°	1122188	2468	1103
25°	1823730	871	0
30°	2001589	285	0
35°	1818957	0	0
40°	1561148	0	0
45°	1157167	0	0
50°	782502	0	0
55°	264324	430	0
60°	37890	987	0
65°	3035	1167	0
70°	0	1442	0
75°	0	3050	0
80°	0	2841	0
85°	0	5661	0



TEST NUMBER: P494448

CATALOG NUMBER: LDA2B108027R30D010 2LBDLC1MW-30DEG TILT

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2.1	0.3
10°-20°	36.8	5.2
20°-30°	209.1	29.2
30°-40°	272.4	38.1
40°-50°	159.6	22.3
50°-60°	32.2	4.5
60°-70°	1.2	0.2
70°-80°	0.8	0.1
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	248.0	34.7
0°-40°	520.4	72.8
0°-60°	712.1	99.6
0°-90°	714.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	714.9	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	16	16	16	16	16	
5°	35	25	14	11	10	5
15°	614	70	9	6	5	260
25°	3350	118	2	1	0	1482
35°	3020	86	0	0	0	1881
45°	1658	21	0	0	0	1296
55°	307	2	0	0	0	359
65°	3	0	1	1	0	7
75°	0	1	2	1	0	0
85°	0	1	1	1	0	0
90°	0	0	0	0	0	



TEST NUMBER: P494448

CATALOG NUMBER: LDA2B108027R30D010 2LBDLC1MW-30DEG TILT

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1	16.1
2.5°	21.8	20.2	19.2	16.6	15.0	14.0	13.5	13.0	12.4
5°	34.7	32.1	24.9	18.1	14.5	12.4	11.4	10.4	10.4
7.5°	59.6	48.2	32.7	19.2	13.5	10.9	9.8	8.3	7.8
10°	103.1	80.3	44.6	20.2	12.4	9.8	7.8	7.3	6.7
12.5°	242.0	146.7	56.5	20.2	10.9	8.3	6.7	6.2	5.7
15°	613.7	299.1	70.0	19.2	8.8	6.2	5.7	5.2	5.2
17.5°	1272.9	614.2	85.0	17.6	7.3	4.7	4.1	3.6	3.6
20°	2137.4	1100.9	99.5	15.0	4.7	3.1	2.6	2.1	2.1
21°	2455.7	1277.6	106.8	14.0	4.1	2.6	2.1	2.1	1.6
22°	2741.8	1439.8	110.9	13.5	3.1	2.1	2.1	1.6	1.6
23°	2926.3	1645.6	114.5	11.9	2.6	1.6	1.6	1.0	0.5
24°	3204.6	1806.8	116.1	10.9	2.1	1.6	1.0	0.5	0.5
25°	3350.2	1952.9	117.7	9.8	1.6	1.6	1.0	0.5	0.0
26°	3454.9	2068.5	123.4	9.3	1.6	1.0	1.0	0.5	0.0
27°	3536.8	2142.1	126.5	8.3	1.0	1.0	1.0	0.0	0.0
28°	3532.2	2195.5	123.9	7.3	1.0	1.0	0.5	0.0	0.0
29°	3554.4	2231.8	122.3	6.2	0.5	0.5	0.5	0.0	0.0
30°	3513.5	2234.9	116.6	5.7	0.5	0.5	0.5	0.0	0.0
31°	3451.3	2197.0	114.5	5.2	0.0	0.5	0.5	0.0	0.0
32°	3392.7	2179.9	107.8	4.1	0.0	0.5	0.5	0.0	0.0
33°	3292.2	2103.2	101.1	3.6	0.0	0.5	0.0	0.0	0.0
34°	3157.4	2028.1	94.8	3.1	0.0	0.5	0.0	0.0	0.0
35°	3020.1	1965.9	86.0	3.1	0.0	0.5	0.0	0.0	0.0
36°	2906.1	1852.9	79.8	2.6	0.0	0.5	0.0	0.0	0.0
37°	2767.7	1756.0	71.5	2.1	0.0	0.0	0.0	0.0	0.0
38°	2673.3	1619.7	65.3	2.1	0.0	0.0	0.0	0.0	0.0
39°	2546.4	1504.6	57.5	1.6	0.0	0.0	0.0	0.0	0.0
40°	2424.0	1385.4	49.8	1.0	0.0	0.0	0.0	0.0	0.0
42.5°	2073.2	1068.7	34.2	0.5	0.0	0.0	0.0	0.0	0.0
45°	1658.5	783.7	21.2	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	1317.0	529.2	13.5	0.0	0.0	0.0	0.0	0.0	0.0
50°	1019.5	272.6	7.8	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	677.9	115.6	4.7	0.0	0.0	0.5	0.0	0.0	0.0
55°	307.3	60.1	2.1	0.0	0.5	0.5	0.5	0.0	0.0
57.5°	123.9	25.9	1.0	0.5	0.5	0.5	0.5	0.0	0.0
60°	38.4	7.3	0.5	0.5	1.0	1.0	0.5	0.0	0.0
62.5°	7.8	1.6	0.5	1.0	1.0	1.0	0.5	0.0	0.0
65°	2.6	0.5	0.5	1.0	1.0	1.0	1.0	0.0	0.0
67.5°	0.5	0.5	0.5	1.0	1.0	1.0	1.0	0.5	0.0
70°	0.0	0.5	1.0	1.0	1.0	1.6	1.0	0.5	0.0
72.5°	0.0	0.5	1.0	1.0	1.0	1.0	1.0	0.5	0.0
75°	0.0	0.5	1.0	1.0	1.6	1.6	1.0	0.5	0.0
77.5°	0.0	0.5	1.0	1.0	1.0	1.0	1.0	0.5	0.0
80°	0.0	0.5	1.0	1.0	1.0	1.0	1.0	0.5	0.0



TEST NUMBER: P494448

CATALOG NUMBER: LDA2B108027R30D010 2LBDLC1MW-30DEG TILT

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
82.5°	0.0	0.5	1.0	1.0	1.0	1.0	1.0	0.5	0.0
85°	0.0	0.5	1.0	1.0	1.0	1.0	1.0	0.0	0.0
87.5°	0.0	0.5	1.0	1.0	1.0	1.0	0.5	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)