

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P494576

Luminaire Tested: **LDA2B108027R70D010 2LBDL1MB**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P494576  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B108027R70D010 2LBDL1MB  
Description: 1000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 2700K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 941.0 lumens  
Efficiency: N/A  
Efficacy: 94.1 lumens/watt  
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P494576

CATALOG NUMBER: LDA2B108027R70D010 2LBDL1MB

### Luminous Intensity Polar Plot

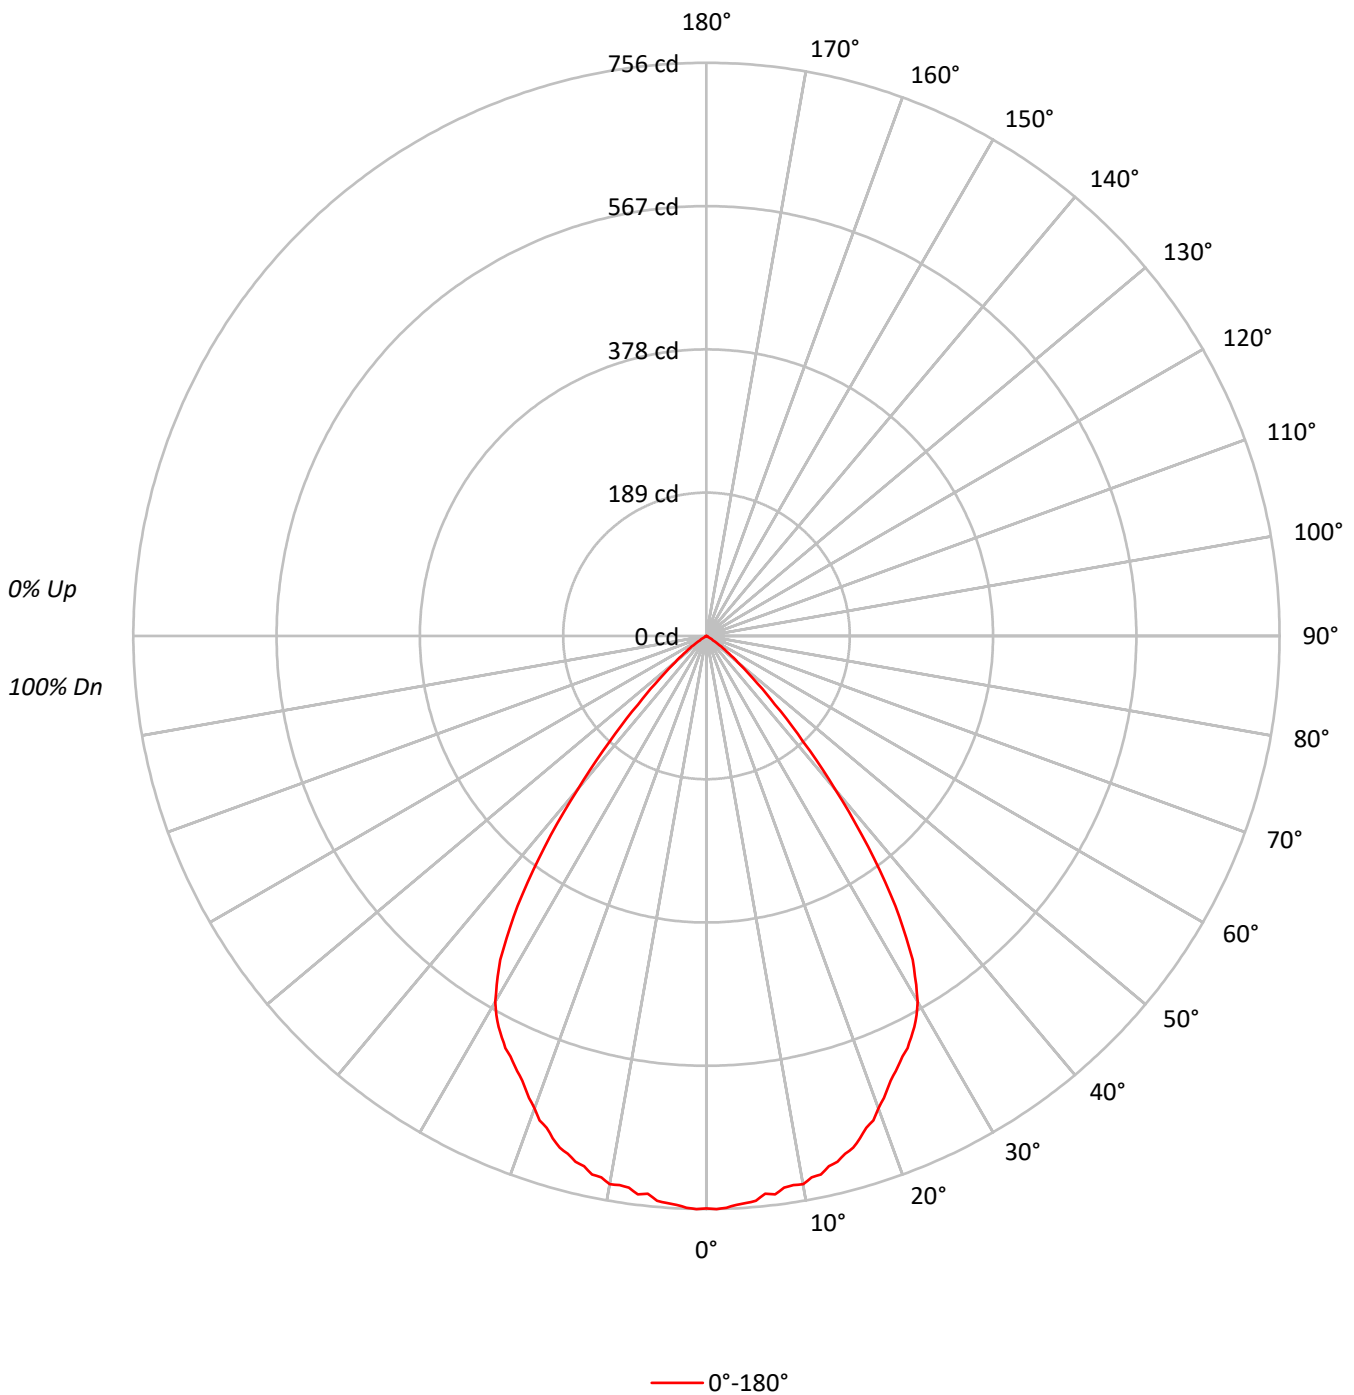



TEST NUMBER: P494576

CATALOG NUMBER: LDA2B108027R70D010 2LBDL1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63	71	66	63	70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56
8	75	65	58	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48
10	68	57	51	46	66	57	50	46	56	50	46	55	50	46	54	49	46	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	372587
5°	370395
10°	367914
15°	361111
20°	348039
25°	333206
30°	317429
35°	261873
40°	170219
45°	88959
50°	41370
55°	15139
60°	1579
65°	1167
70°	721
75°	953
80°	0
85°	0



TEST NUMBER: P494576

CATALOG NUMBER: LDA2B108027R70D010 2LBDL1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	70.7	7.5
10°-20°	198.7	21.1
20°-30°	282.0	30.0
30°-40°	263.7	28.0
40°-50°	106.1	11.3
50°-60°	18.5	2.0
60°-70°	0.9	0.1
70°-80°	0.5	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	551.4	58.6
0°-40°	815.1	86.6
0°-60°	939.7	99.9
0°-90°	941.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	941.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	755	
5°	748	71
15°	707	199
25°	612	282
35°	435	264
45°	128	106
55°	18	19
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P494576

CATALOG NUMBER: LDA2B108027R70D010 2LBDL1MB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	755.2
1°	756.2
2°	754.6
3°	751.5
4°	750.0
5°	747.9
6°	739.6
7°	742.2
8°	734.9
9°	733.4
10°	734.4
11°	727.7
12°	726.1
13°	717.8
14°	714.7
15°	707.0
16°	702.3
17°	693.0
18°	682.1
19°	675.9
20°	662.9
21°	653.0
22.5°	634.9
23°	630.2
24°	621.4
25°	612.1
26°	604.8
27°	594.5
28°	584.1
29°	571.7
30°	557.2
32.5°	506.4
35°	434.8
37.5°	350.4
40°	264.3
42.5°	188.7
45°	127.5
47.5°	84.0
50°	53.9
52.5°	33.7
55°	17.6
57.5°	5.7
60°	1.6
62.5°	1.0
65°	1.0



TEST NUMBER: P494576

CATALOG NUMBER: LDA2B108027R70D010 2LBDL1MB

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)