

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P494584

Luminaire Tested: **LDA2B108027R70D010 2LBDLC1MW**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P494584  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B108027R70D010 2LBDLC1MW  
Description: 1000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 2700K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1016.4 lumens  
Efficiency: N/A  
Efficacy: 101.6 lumens/watt  
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P494584

CATALOG NUMBER: LDA2B108027R70D010 2LBDLC1MW

### Luminous Intensity Polar Plot

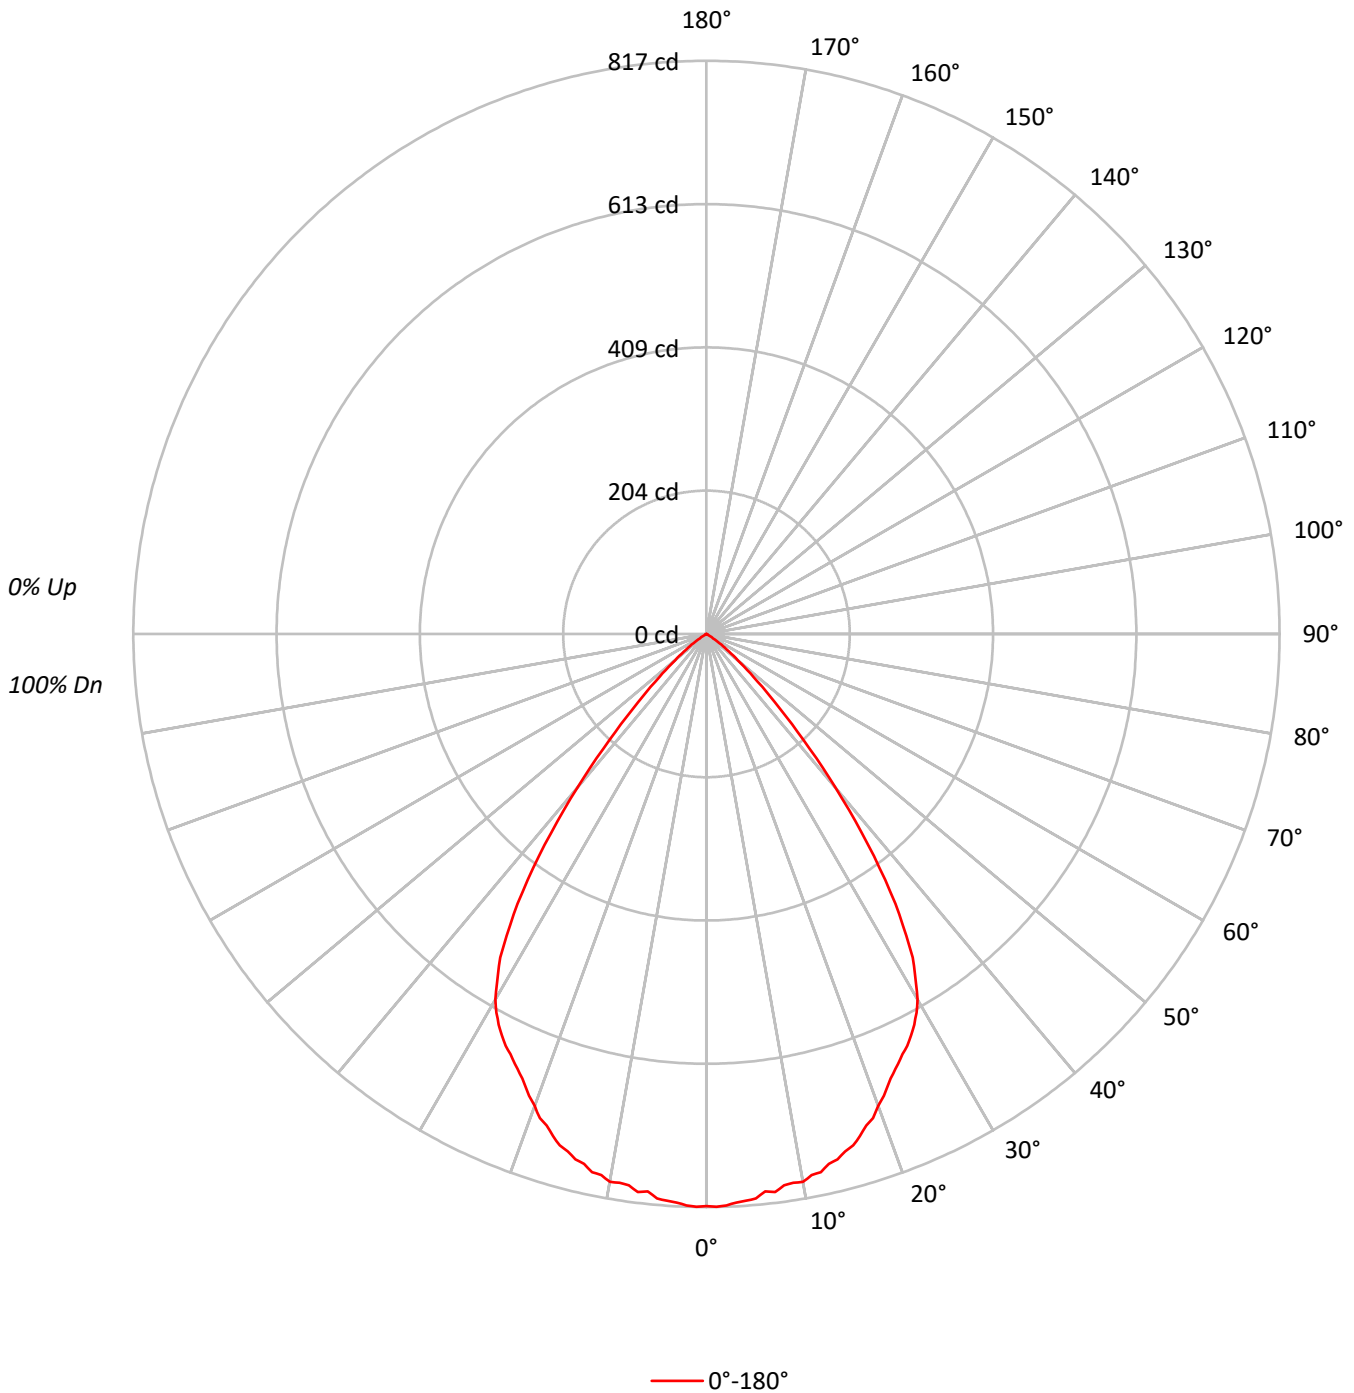



TEST NUMBER: P494584

CATALOG NUMBER: LDA2B108027R70D010 2LBDLC1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	81	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63	71	66	63	70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56
8	75	65	58	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48
10	68	57	51	46	66	57	50	46	56	50	46	55	50	46	54	49	46	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	402386
5°	400060
10°	397372
15°	389970
20°	375865
25°	359879
30°	342837
35°	282832
40°	183873
45°	96076
50°	44671
55°	16343
60°	1677
65°	1284
70°	865
75°	1144
80°	0
85°	0



TEST NUMBER: P494584

CATALOG NUMBER: LDA2B108027R70D010 2LBDLC1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	76.4	7.5
10°-20°	214.6	21.1
20°-30°	304.5	30.0
30°-40°	284.8	28.0
40°-50°	114.5	11.3
50°-60°	20.0	2.0
60°-70°	1.0	0.1
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.5	58.6
0°-40°	880.3	86.6
0°-60°	1014.9	99.8
0°-90°	1016.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1016.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	816	
5°	808	76
15°	764	215
25°	661	305
35°	470	285
45°	138	115
55°	19	20
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P494584

CATALOG NUMBER: LDA2B108027R70D010 2LBDLC1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	815.6
1°	816.7
2°	815.0
3°	811.7
4°	810.0
5°	807.8
6°	798.8
7°	801.6
8°	793.8
9°	792.1
10°	793.2
11°	785.9
12°	784.2
13°	775.3
14°	771.9
15°	763.5
16°	758.5
17°	748.4
18°	736.7
19°	729.9
20°	715.9
21°	705.3
22.5°	685.7
23°	680.7
24°	671.2
25°	661.1
26°	653.3
27°	642.1
28°	630.9
29°	617.4
30°	601.8
32.5°	546.9
35°	469.6
37.5°	378.4
40°	285.5
42.5°	203.8
45°	137.7
47.5°	90.7
50°	58.2
52.5°	36.4
55°	19.0
57.5°	6.2
60°	1.7
62.5°	1.1
65°	1.1



TEST NUMBER: P494584

CATALOG NUMBER: LDA2B108027R70D010 2LBDLC1MW

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)