

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P494705

Luminaire Tested: **LDA2B108030R35D010 2LBDLC1MMS**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P494705
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-29)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B108030R35D010 2LBDLC1MMS
Description: 1000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3000K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1077.9 lumens
Efficiency: N/A
Efficacy: 107.8 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.51
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P494705

CATALOG NUMBER: LDA2B108030R35D010 2LBDLC1MMS

Luminous Intensity Polar Plot

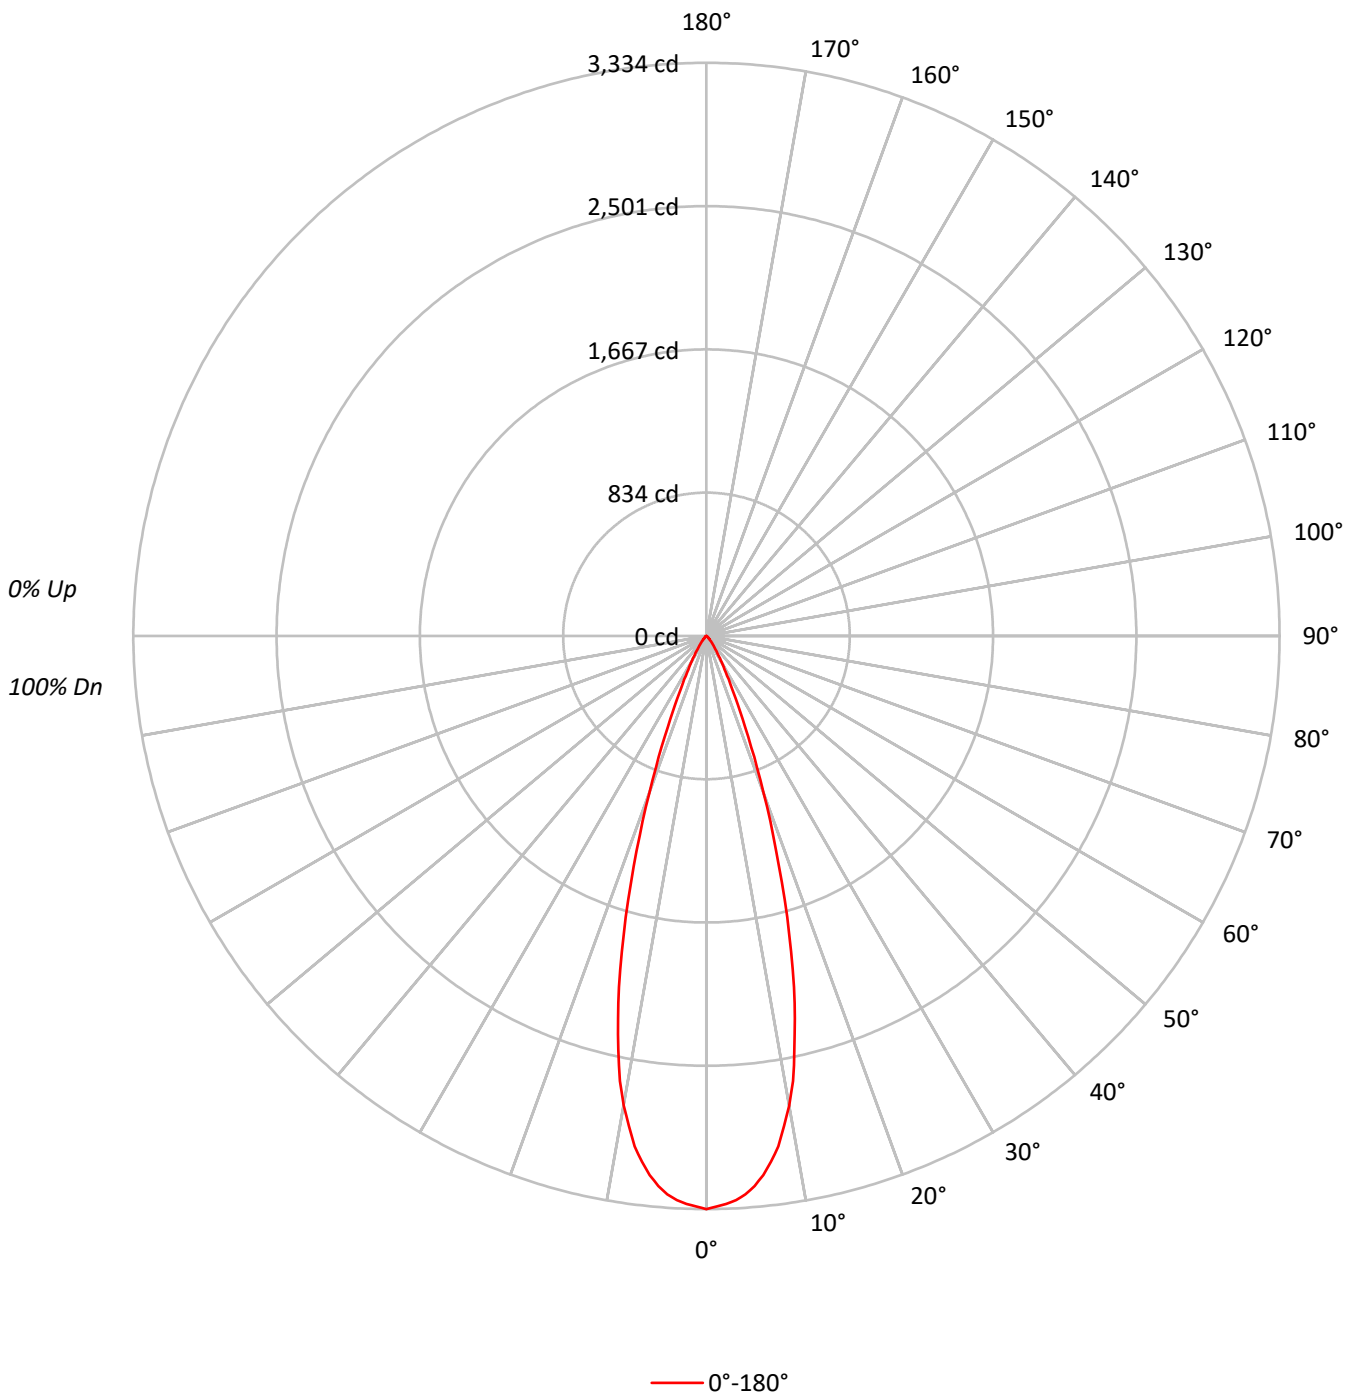



TEST NUMBER: P494705

CATALOG NUMBER: LDA2B108030R35D010 2LBDLC1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20													
RC	80					70					50					30					10					0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0				
RCR																																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																
4	103	97	93	90	102	96	92	89	94	91	88	92	90	87	91	88	87	85																
5	100	93	89	86	98	93	88	85	91	87	85	89	86	84	88	85	83	82																
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79																
7	93	86	82	79	92	86	82	79	85	81	78	84	80	78	83	80	77	76																
8	90	83	79	76	89	83	79	76	82	78	75	81	78	75	80	77	75	74																
9	88	81	76	73	87	80	76	73	79	76	73	79	75	73	78	75	72	71																
10	85	78	74	71	84	78	73	71	77	73	70	76	73	70	76	72	70	69																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1645066
5°	1590484
10°	1389899
15°	971681
20°	510219
25°	219216
30°	100265
35°	48604
40°	24731
45°	12559
50°	6908
55°	2925
60°	1085
65°	700
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P494705

CATALOG NUMBER: LDA2B108030R35D010 2LBDLC1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	292.7	27.2
10°-20°	507.7	47.1
20°-30°	202.6	18.8
30°-40°	55.3	5.1
40°-50°	15.3	1.4
50°-60°	3.6	0.3
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1003.0	93.1
0°-40°	1058.3	98.2
0°-60°	1077.2	99.9
0°-90°	1077.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1077.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3334	
5°	3212	293
15°	1902	508
25°	403	203
35°	81	55
45°	18	15
55°	3	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P494705

CATALOG NUMBER: LDA2B108030R35D010 2LBDLC1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	3334.4
1°	3320.3
2°	3306.8
3°	3286.5
4°	3256.0
5°	3211.5
6°	3153.4
7°	3081.2
8°	2998.8
9°	2884.9
10°	2774.4
11°	2637.3
12°	2461.9
13°	2285.4
14°	2105.4
15°	1902.4
16°	1702.7
17°	1497.4
18°	1313.0
19°	1138.7
20°	971.8
21°	818.4
22.5°	634.5
23°	575.3
24°	482.8
25°	402.7
26°	339.0
27°	283.1
28°	239.7
29°	204.2
30°	176.0
32.5°	117.9
35°	80.7
37.5°	56.4
40°	38.4
42.5°	25.9
45°	18.0
47.5°	13.0
50°	9.0
52.5°	6.2
55°	3.4
57.5°	1.7
60°	1.1
62.5°	1.1
65°	0.6



TEST NUMBER: P494705

CATALOG NUMBER: LDA2B108030R35D010 2LBDLC1MMS

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.6
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)