

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280360

Luminaire Tested: **LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P280360  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH  
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND  
2in ADJ spun Refl, Self-Flanged, WHH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1173.5 lumens  
Efficiency: N/A  
Efficacy: 117.4 lumens/watt  
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P280360

CATALOG NUMBER: LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH

### Luminous Intensity Polar Plot

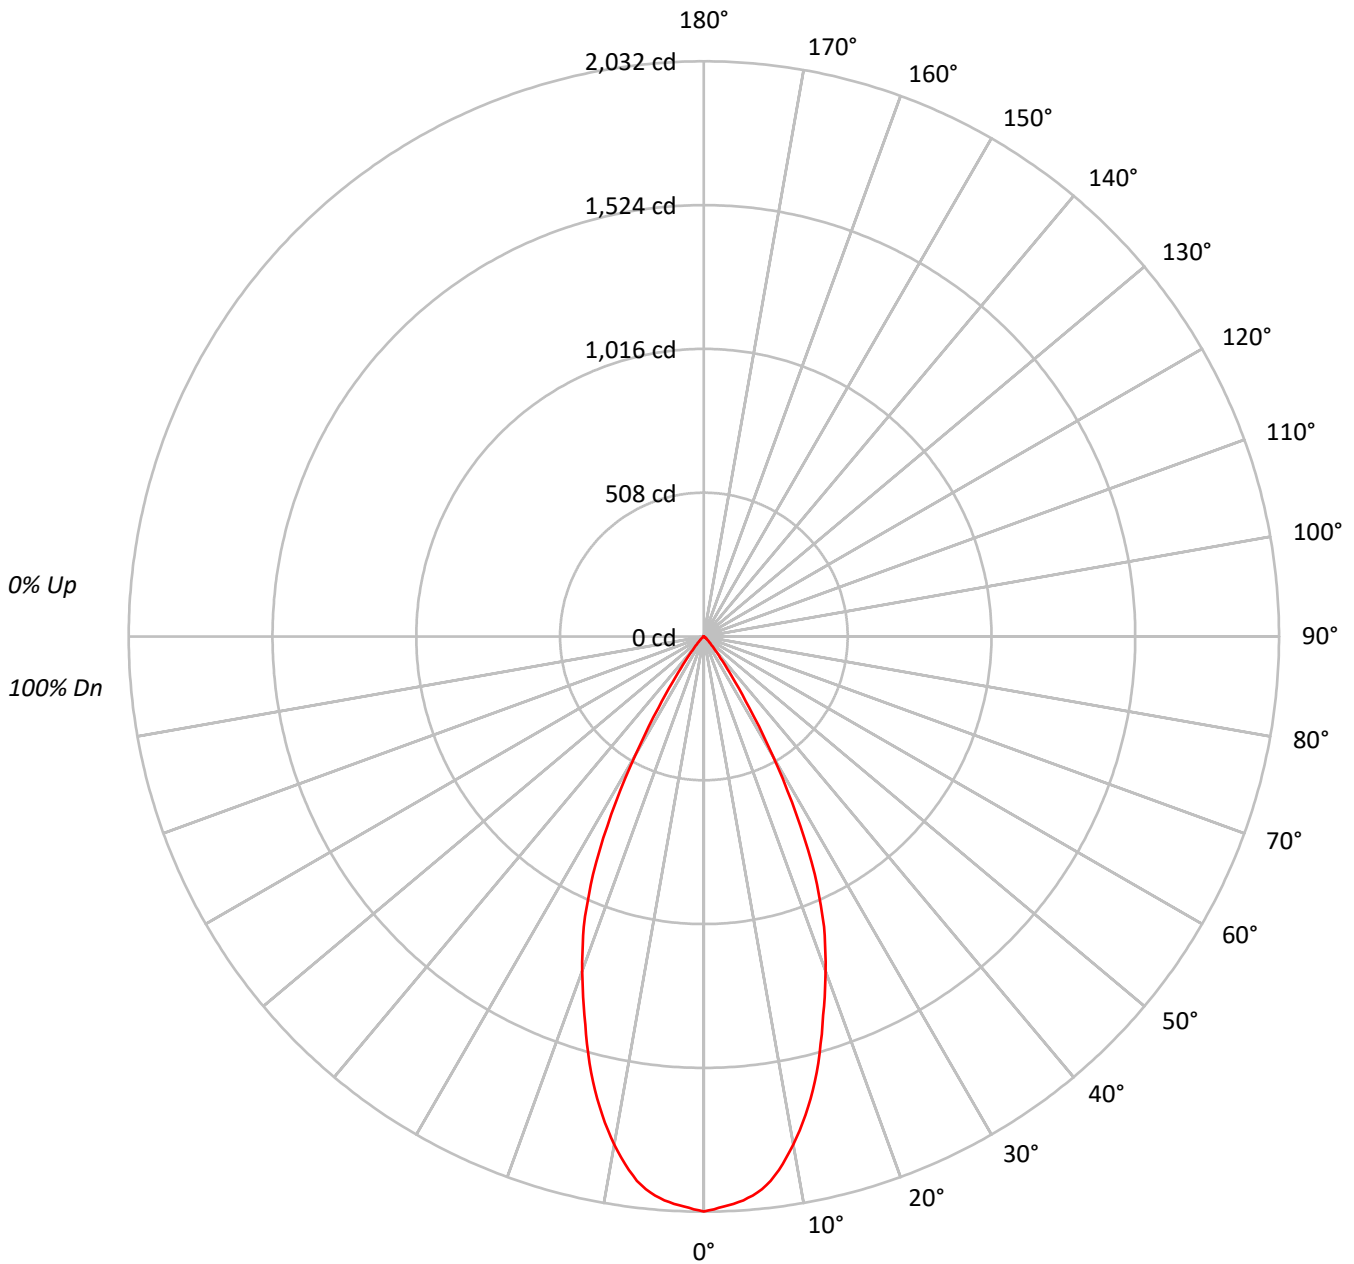



TEST NUMBER: P280360

CATALOG NUMBER: LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85			
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76			
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72			
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69			
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65			
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62			
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1002264
5°	981826
10°	913023
15°	797203
20°	660008
25°	504789
30°	276240
35°	102268
40°	35422
45°	15978
50°	7522
55°	3785
60°	1085
65°	584
70°	721
75°	0
80°	0
85°	0



TEST NUMBER: P280360

CATALOG NUMBER: LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	184.2	15.7
10°-20°	431.4	36.8
20°-30°	407.7	34.7
30°-40°	125.5	10.7
40°-50°	19.8	1.7
50°-60°	4.2	0.4
60°-70°	0.6	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1023.3	87.2
0°-40°	1148.9	97.9
0°-60°	1172.9	99.9
0°-90°	1173.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1173.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2032	
5°	1982	184
15°	1561	431
25°	927	408
35°	170	126
45°	23	20
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280360

CATALOG NUMBER: LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2031.5
1°	2023.9
2°	2014.6
3°	2007.0
4°	1997.2
5°	1982.5
6°	1963.5
7°	1937.9
8°	1903.6
9°	1863.9
10°	1822.5
11°	1776.8
12°	1728.4
13°	1675.6
14°	1620.6
15°	1560.8
17.5°	1402.4
20°	1257.1
22.5°	1109.6
25°	927.3
27.5°	707.5
30°	484.9
32.5°	297.7
35°	169.8
37.5°	94.7
40°	55.0
42.5°	34.3
45°	22.9
47.5°	15.2
50°	9.8
52.5°	6.5
55°	4.4
57.5°	2.7
60°	1.1
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280360

CATALOG NUMBER: LDA2B108035D010 EU2B10WFL558035 2LBAD1WHH

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)