

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280402

Luminaire Tested: **LDA2B109024D010 EU2B10WFL559024 2LBAD1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P280402
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B109024D010 EU2B10WFL559024 2LBAD1H
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in ADJ spun Refl, Self-Flanged, H
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 826.9 lumens
Efficiency: N/A
Efficacy: 82.7 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P280402

CATALOG NUMBER: LDA2B109024D010 EU2B10WFL559024 2LBAD1H

Luminous Intensity Polar Plot

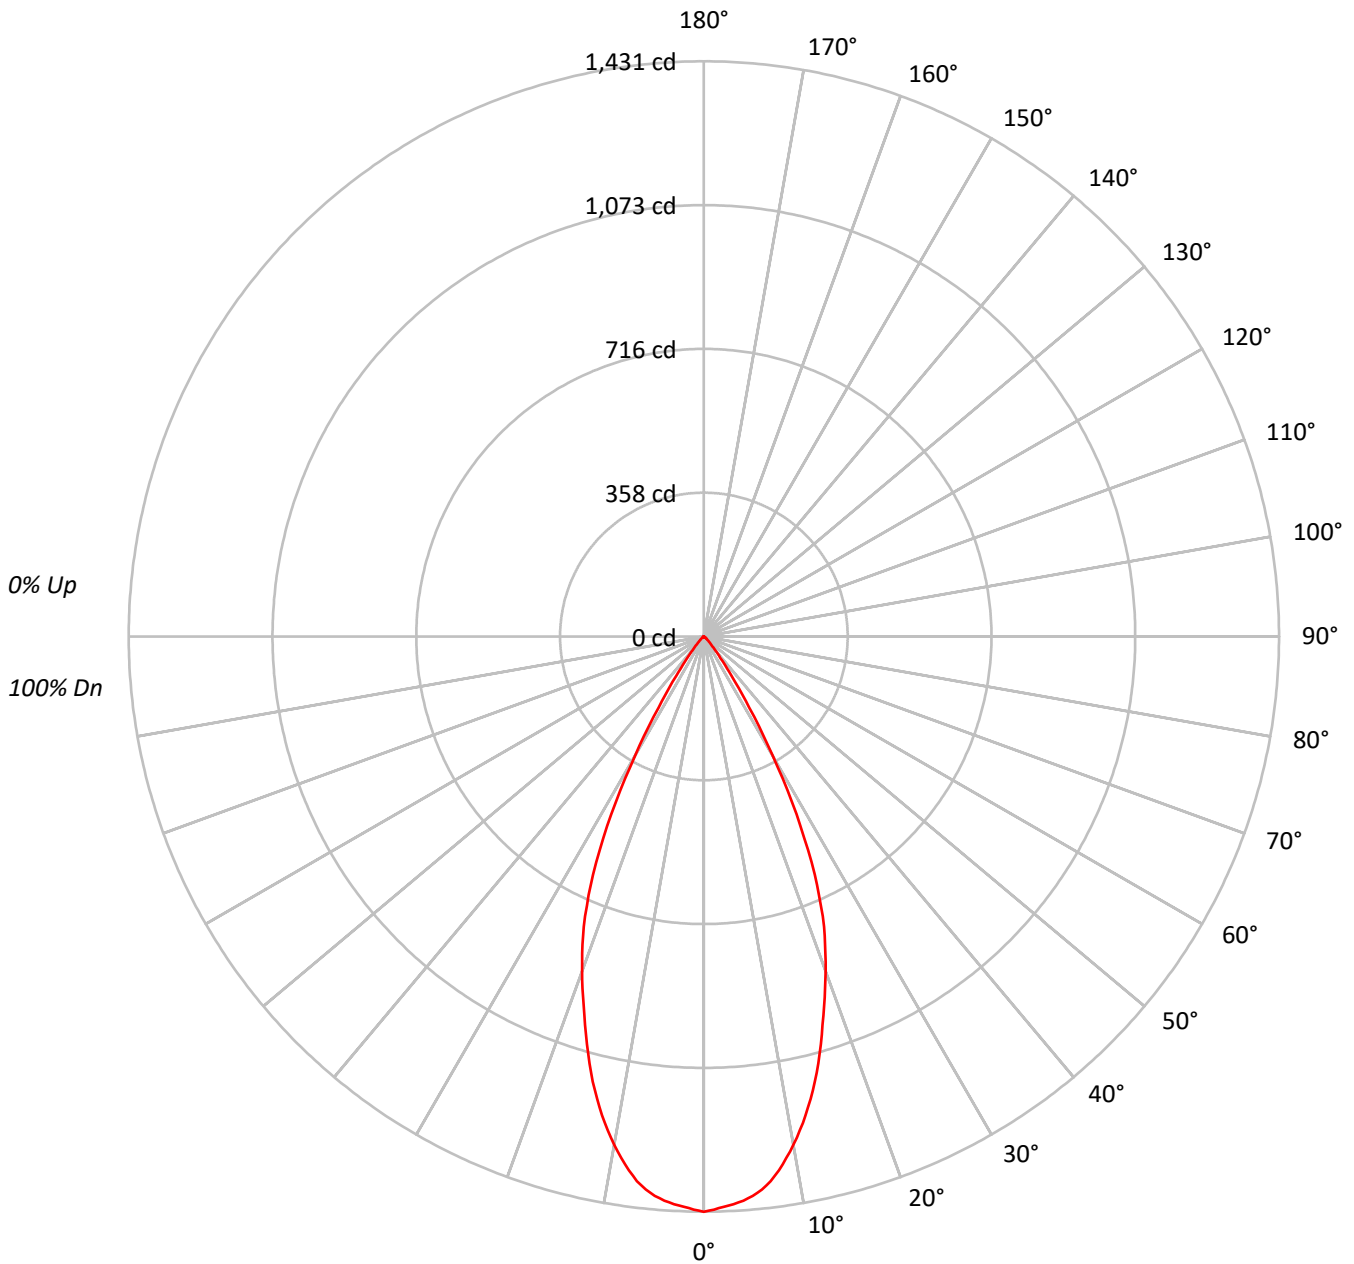



TEST NUMBER: P280402

CATALOG NUMBER: LDA2B109024D010 EU2B10WFL559024 2LBAD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95						95													
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85						85													
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80						80													
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76						76													
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72						72													
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69						69													
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65						65													
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62						62													
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59						59													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	706198
5°	691810
10°	643349
15°	561689
20°	465067
25°	355688
30°	194661
35°	72033
40°	24924
45°	11233
50°	5296
55°	2666
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P280402

CATALOG NUMBER: LDA2B109024D010 EU2B10WFL559024 2LBAD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.8	15.7
10°-20°	304.0	36.8
20°-30°	287.3	34.7
30°-40°	88.4	10.7
40°-50°	14.0	1.7
50°-60°	3.0	0.4
60°-70°	0.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	721.1	87.2
0°-40°	809.5	97.9
0°-60°	826.4	99.9
0°-90°	826.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	826.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1431	
5°	1397	130
15°	1100	304
25°	653	287
35°	120	88
45°	16	14
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280402

CATALOG NUMBER: LDA2B109024D010 EU2B10WFL559024 2LBAD1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1431.4
1°	1426.1
2°	1419.5
3°	1414.2
4°	1407.3
5°	1396.9
6°	1383.5
7°	1365.5
8°	1341.3
9°	1313.3
10°	1284.2
11°	1252.0
12°	1217.9
13°	1180.7
14°	1141.9
15°	1099.7
17.5°	988.2
20°	885.8
22.5°	781.9
25°	653.4
27.5°	498.5
30°	341.7
32.5°	209.7
35°	119.6
37.5°	66.7
40°	38.7
42.5°	24.2
45°	16.1
47.5°	10.7
50°	6.9
52.5°	4.6
55°	3.1
57.5°	1.9
60°	0.8
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280402

CATALOG NUMBER: LDA2B109024D010 EU2B10WFL559024 2LBAD1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)