

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P495524

Luminaire Tested: **LDA2B109024R30D010 2LBDLC1MB-30DEG TILT**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P495524  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/8/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B109024R30D010 2LBDLC1MB-30DEG TILT  
Description: 1000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2400K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 523.0 lumens  
Efficiency: N/A  
Efficacy: 52.3 lumens/watt  
Spacing Criteria (0/90/45): 3.2 / 0.53 / 1.4  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 10  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P495524

CATALOG NUMBER: LDA2B109024R30D010 2LBDLC1MB-30DEG TILT

### Luminous Intensity Polar Plot

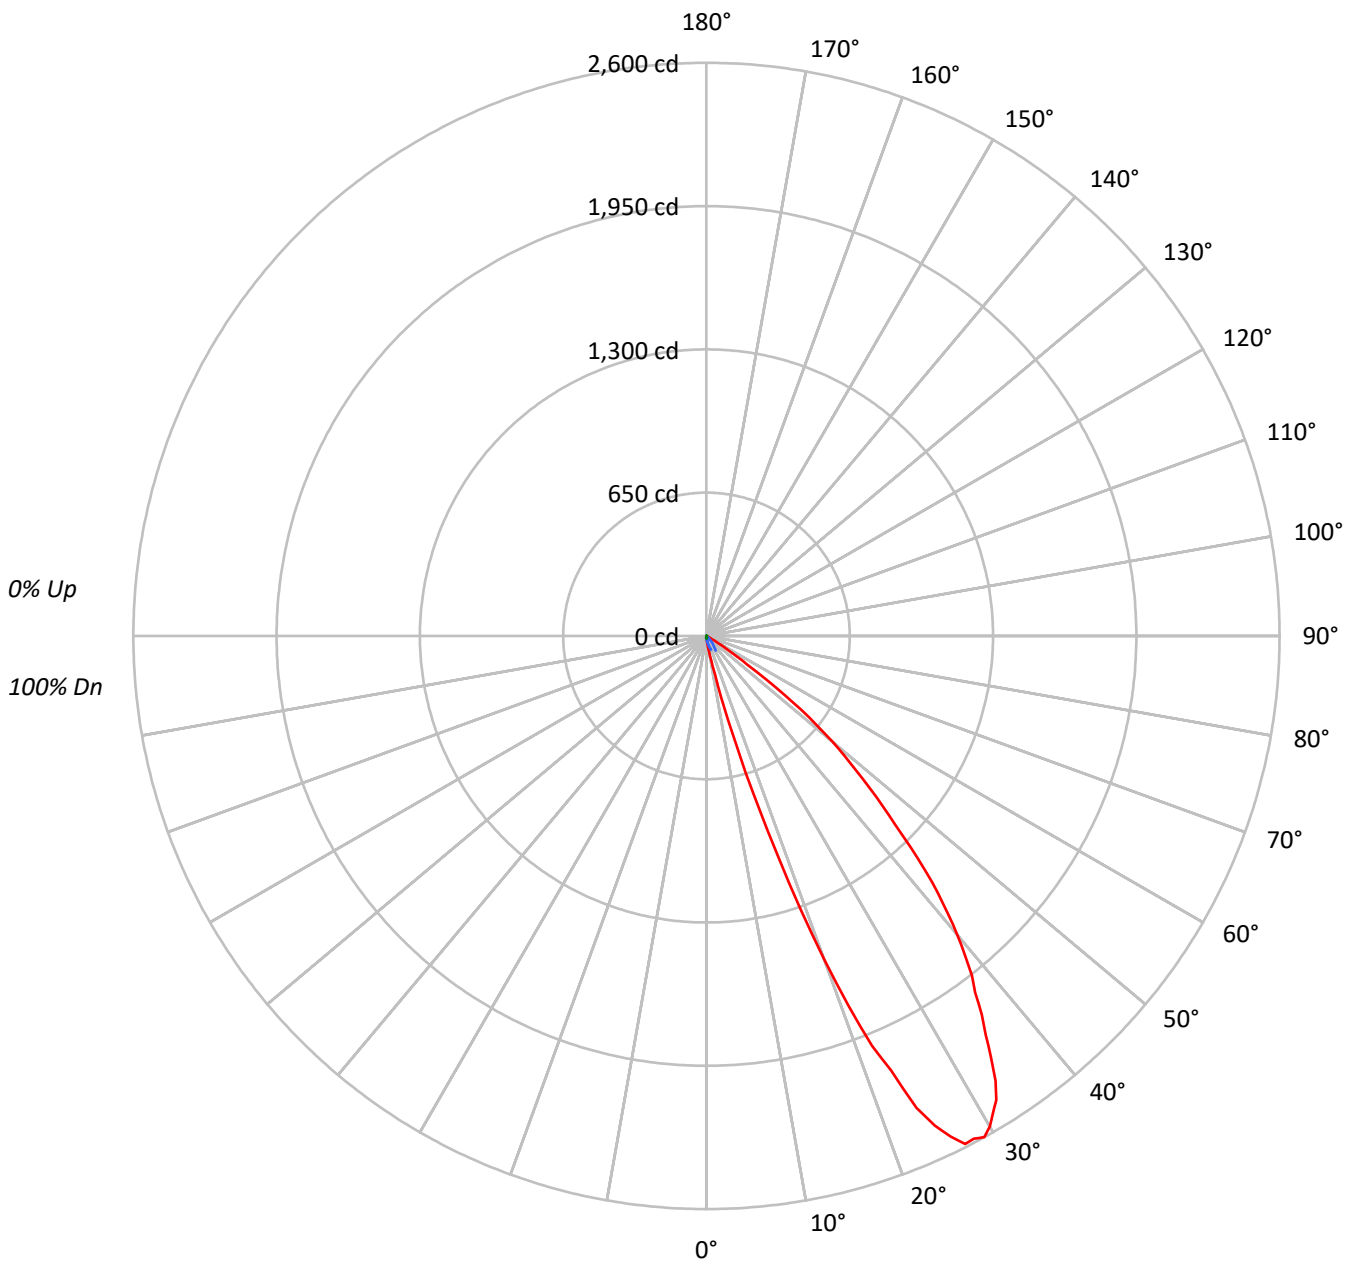

— 0°-180°    - - - 45°-225°    ····· 90°-270°



TEST NUMBER: P495524

CATALOG NUMBER: LDA2B109024R30D010 2LBDLC1MB-30DEG TILT

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	109	106	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90					90			
2	104	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82	80					80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71					71			
4	90	80	73	68	88	79	72	67	77	71	66	75	70	66	73	68	65	63					63			
5	83	73	65	60	82	72	65	59	70	63	59	68	62	58	66	61	57	56					56			
6	77	66	58	52	76	65	58	52	63	57	52	62	56	51	60	55	51	49					49			
7	72	60	52	46	70	59	51	46	57	51	46	56	50	46	55	49	45	44					44			
8	66	54	46	41	65	54	46	41	52	46	41	51	45	41	50	44	40	39					39			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34					34			
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32	31					31			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	5822	5822	5822
5°	12579	5250	3764
10°	37773	4559	2455
15°	229232	3269	1941
20°	820719	1785	788
25°	1333802	599	0
30°	1463863	228	0
35°	1330324	0	0
40°	1141815	0	0
45°	846333	0	0
50°	572274	0	0
55°	193362	344	0
60°	27727	789	0
65°	2218	934	0
70°	0	1154	0
75°	0	2097	0
80°	0	2273	0
85°	0	4529	0



TEST NUMBER: P495524

CATALOG NUMBER: LDA2B109024R30D010 2LBDLC1MB-30DEG TILT

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1.5	0.3
10°-20°	26.9	5.2
20°-30°	152.9	29.2
30°-40°	199.2	38.1
40°-50°	116.7	22.3
50°-60°	23.6	4.5
60°-70°	0.9	0.2
70°-80°	0.7	0.1
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	181.4	34.7
0°-40°	380.6	72.8
0°-60°	520.8	99.6
0°-90°	523.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	523.0	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	12	12	12	12	12	
5°	25	18	11	8	8	4
15°	449	51	6	4	4	190
25°	2450	86	1	1	0	1084
35°	2209	63	0	0	0	1376
45°	1213	16	0	0	0	948
55°	225	2	0	0	0	262
65°	2	0	1	1	0	5
75°	0	1	1	1	0	0
85°	0	1	1	1	0	0
90°	0	0	0	0	0	



TEST NUMBER: P495524

CATALOG NUMBER: LDA2B109024R30D010 2LBDLC1MB-30DEG TILT

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8
2.5°	15.9	14.8	14.0	12.1	11.0	10.2	9.9	9.5	9.1
5°	25.4	23.5	18.2	13.3	10.6	9.1	8.3	7.6	7.6
7.5°	43.6	35.3	23.9	14.0	9.9	8.0	7.2	6.1	5.7
10°	75.4	58.8	32.6	14.8	9.1	7.2	5.7	5.3	4.9
12.5°	177.0	107.3	41.3	14.8	8.0	6.1	4.9	4.5	4.2
15°	448.8	218.7	51.2	14.0	6.4	4.5	4.2	3.8	3.8
17.5°	931.0	449.2	62.2	12.9	5.3	3.4	3.0	2.7	2.7
20°	1563.2	805.1	72.8	11.0	3.4	2.3	1.9	1.5	1.5
21°	1796.0	934.4	78.1	10.2	3.0	1.9	1.5	1.5	1.1
22°	2005.2	1053.0	81.1	9.9	2.3	1.5	1.5	1.1	1.1
23°	2140.2	1203.5	83.8	8.7	1.9	1.1	1.1	0.8	0.4
24°	2343.7	1321.4	84.9	8.0	1.5	1.1	0.8	0.4	0.4
25°	2450.2	1428.3	86.0	7.2	1.1	1.1	0.8	0.4	0.0
26°	2526.8	1512.8	90.2	6.8	1.1	0.8	0.8	0.4	0.0
27°	2586.7	1566.7	92.5	6.1	0.8	0.8	0.8	0.0	0.0
28°	2583.3	1605.7	90.6	5.3	0.8	0.8	0.4	0.0	0.0
29°	2599.6	1632.2	89.5	4.5	0.4	0.4	0.4	0.0	0.0
30°	2569.6	1634.5	85.3	4.2	0.4	0.4	0.4	0.0	0.0
31°	2524.2	1606.8	83.8	3.8	0.0	0.4	0.4	0.0	0.0
32°	2481.3	1594.3	78.8	3.0	0.0	0.4	0.4	0.0	0.0
33°	2407.8	1538.2	73.9	2.7	0.0	0.4	0.0	0.0	0.0
34°	2309.2	1483.3	69.4	2.3	0.0	0.4	0.0	0.0	0.0
35°	2208.8	1437.8	62.9	2.3	0.0	0.4	0.0	0.0	0.0
36°	2125.4	1355.1	58.4	1.9	0.0	0.4	0.0	0.0	0.0
37°	2024.2	1284.3	52.3	1.5	0.0	0.0	0.0	0.0	0.0
38°	1955.2	1184.6	47.8	1.5	0.0	0.0	0.0	0.0	0.0
39°	1862.3	1100.4	42.1	1.1	0.0	0.0	0.0	0.0	0.0
40°	1772.9	1013.2	36.4	0.8	0.0	0.0	0.0	0.0	0.0
42.5°	1516.2	781.6	25.0	0.4	0.0	0.0	0.0	0.0	0.0
45°	1213.0	573.1	15.5	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	963.2	387.0	9.9	0.0	0.0	0.0	0.0	0.0	0.0
50°	745.6	199.4	5.7	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	495.8	84.5	3.4	0.0	0.0	0.4	0.0	0.0	0.0
55°	224.8	44.0	1.5	0.0	0.4	0.4	0.4	0.0	0.0
57.5°	90.6	19.0	0.8	0.4	0.4	0.4	0.4	0.0	0.0
60°	28.1	5.3	0.4	0.4	0.8	0.8	0.4	0.0	0.0
62.5°	5.7	1.1	0.4	0.8	0.8	0.8	0.4	0.0	0.0
65°	1.9	0.4	0.4	0.8	0.8	0.8	0.8	0.0	0.0
67.5°	0.4	0.4	0.4	0.8	0.8	0.8	0.8	0.4	0.0
70°	0.0	0.4	0.8	0.8	0.8	1.1	0.8	0.4	0.0
72.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0
75°	0.0	0.4	0.8	0.8	1.1	1.1	0.8	0.4	0.0
77.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0
80°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0



TEST NUMBER: P495524

CATALOG NUMBER: LDA2B109024R30D010 2LBDLC1MB-30DEG TILT

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
82.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0
85°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.0	0.0
87.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.4	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)