

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280477

Luminaire Tested: **LDA2B109040D010 EU2B10WFL559040 2LBALD1B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P280477
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B109040D010 EU2B10WFL559040 2LBALD1B
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in ADJ spun Refl w/lens Self-Flanged, B
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 968.4 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P280477

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALD1B

Luminous Intensity Polar Plot

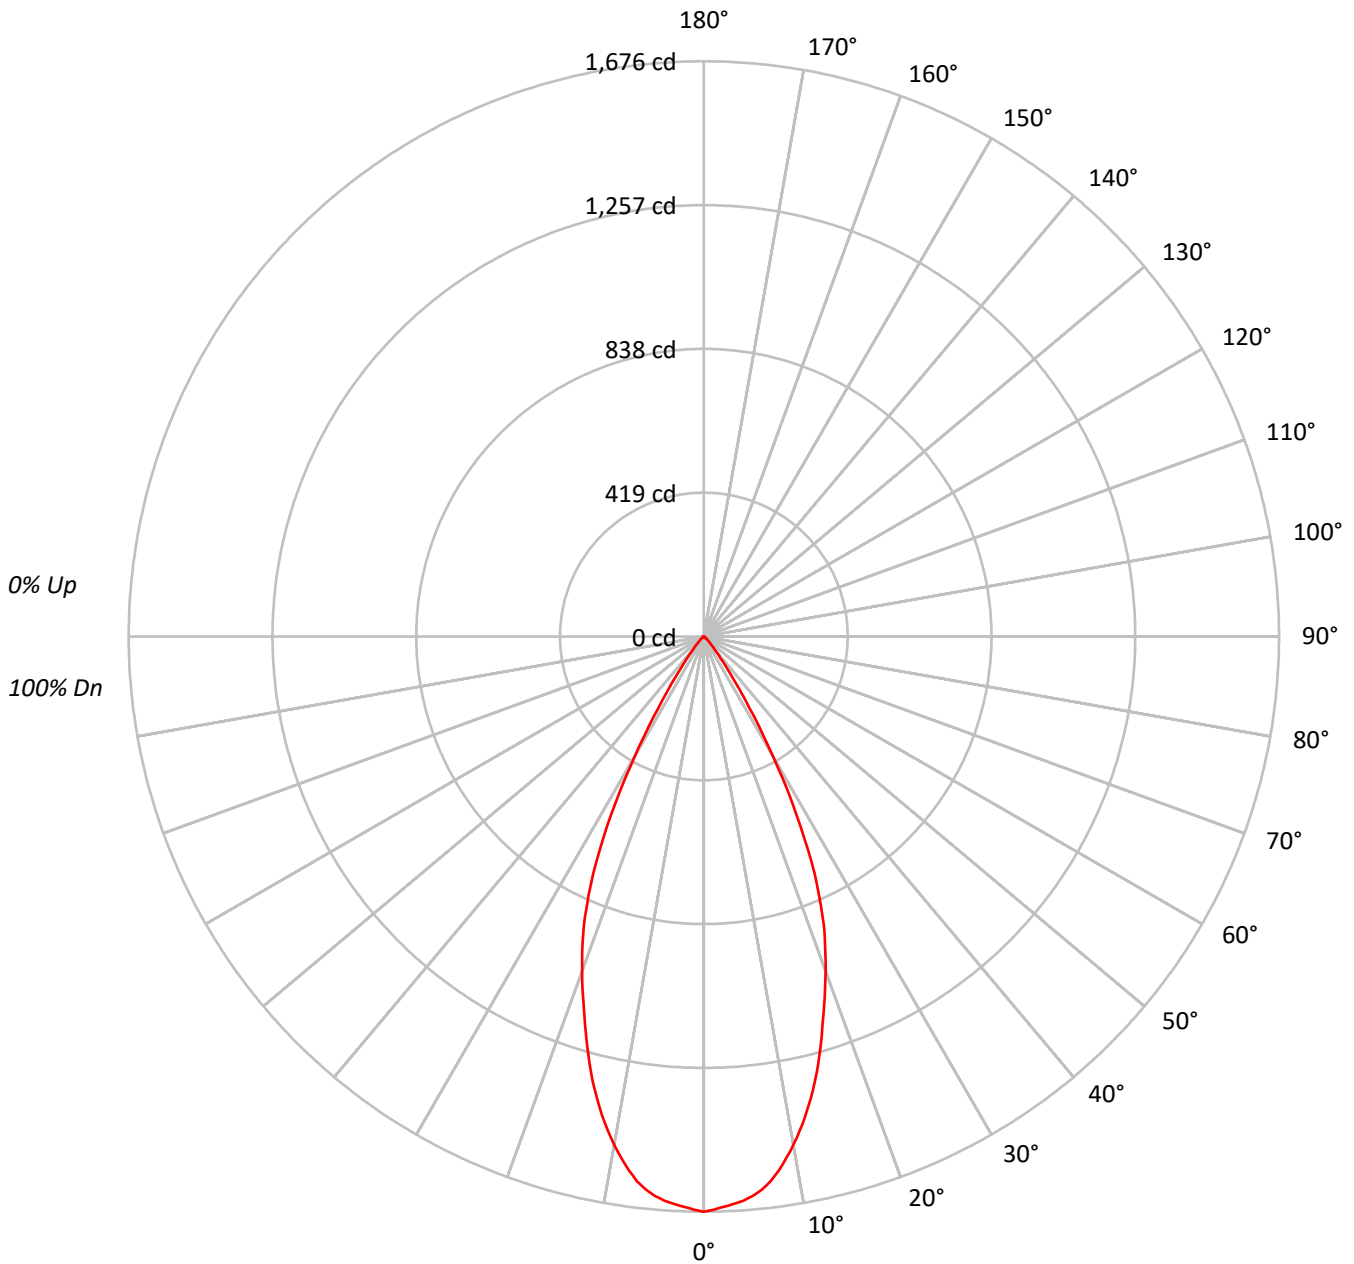



TEST NUMBER: P280477

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALD1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85			
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76			
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72			
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69			
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65			
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62			
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	827072
5°	810223
10°	753463
15°	657866
20°	544661
25°	416548
30°	227931
35°	84380
40°	29239
45°	13187
50°	6217
55°	3097
60°	888
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P280477

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALD1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.0	15.7
10°-20°	356.0	36.8
20°-30°	336.5	34.7
30°-40°	103.6	10.7
40°-50°	16.4	1.7
50°-60°	3.5	0.4
60°-70°	0.5	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	844.5	87.2
0°-40°	948.0	97.9
0°-60°	967.9	99.9
0°-90°	968.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	968.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1676	
5°	1636	152
15°	1288	356
25°	765	336
35°	140	104
45°	19	16
55°	4	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280477

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALD1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1676.4
1°	1670.2
2°	1662.5
3°	1656.2
4°	1648.2
5°	1636.0
6°	1620.3
7°	1599.2
8°	1570.9
9°	1538.1
10°	1504.0
11°	1466.3
12°	1426.3
13°	1382.7
14°	1337.4
15°	1288.0
17.5°	1157.3
20°	1037.4
22.5°	915.7
25°	765.2
27.5°	583.8
30°	400.1
32.5°	245.7
35°	140.1
37.5°	78.1
40°	45.4
42.5°	28.3
45°	18.9
47.5°	12.6
50°	8.1
52.5°	5.4
55°	3.6
57.5°	2.2
60°	0.9
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280477

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALD1B

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)