

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P315024

Luminaire Tested: **LDA2B10NFL9727D010 PINW1MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P315024
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-2)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B10NFL9727D010 PINW1MMS
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH NARROW FLOOD OPTIC
AND 2in Adj PinHole, White oculus, matte metallic silver finish
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 690.2 lumens
Efficiency: N/A
Efficacy: 69.0 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.39
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P315024

CATALOG NUMBER: LDA2B10NFL9727D010 PINW1MMS

Luminous Intensity Polar Plot

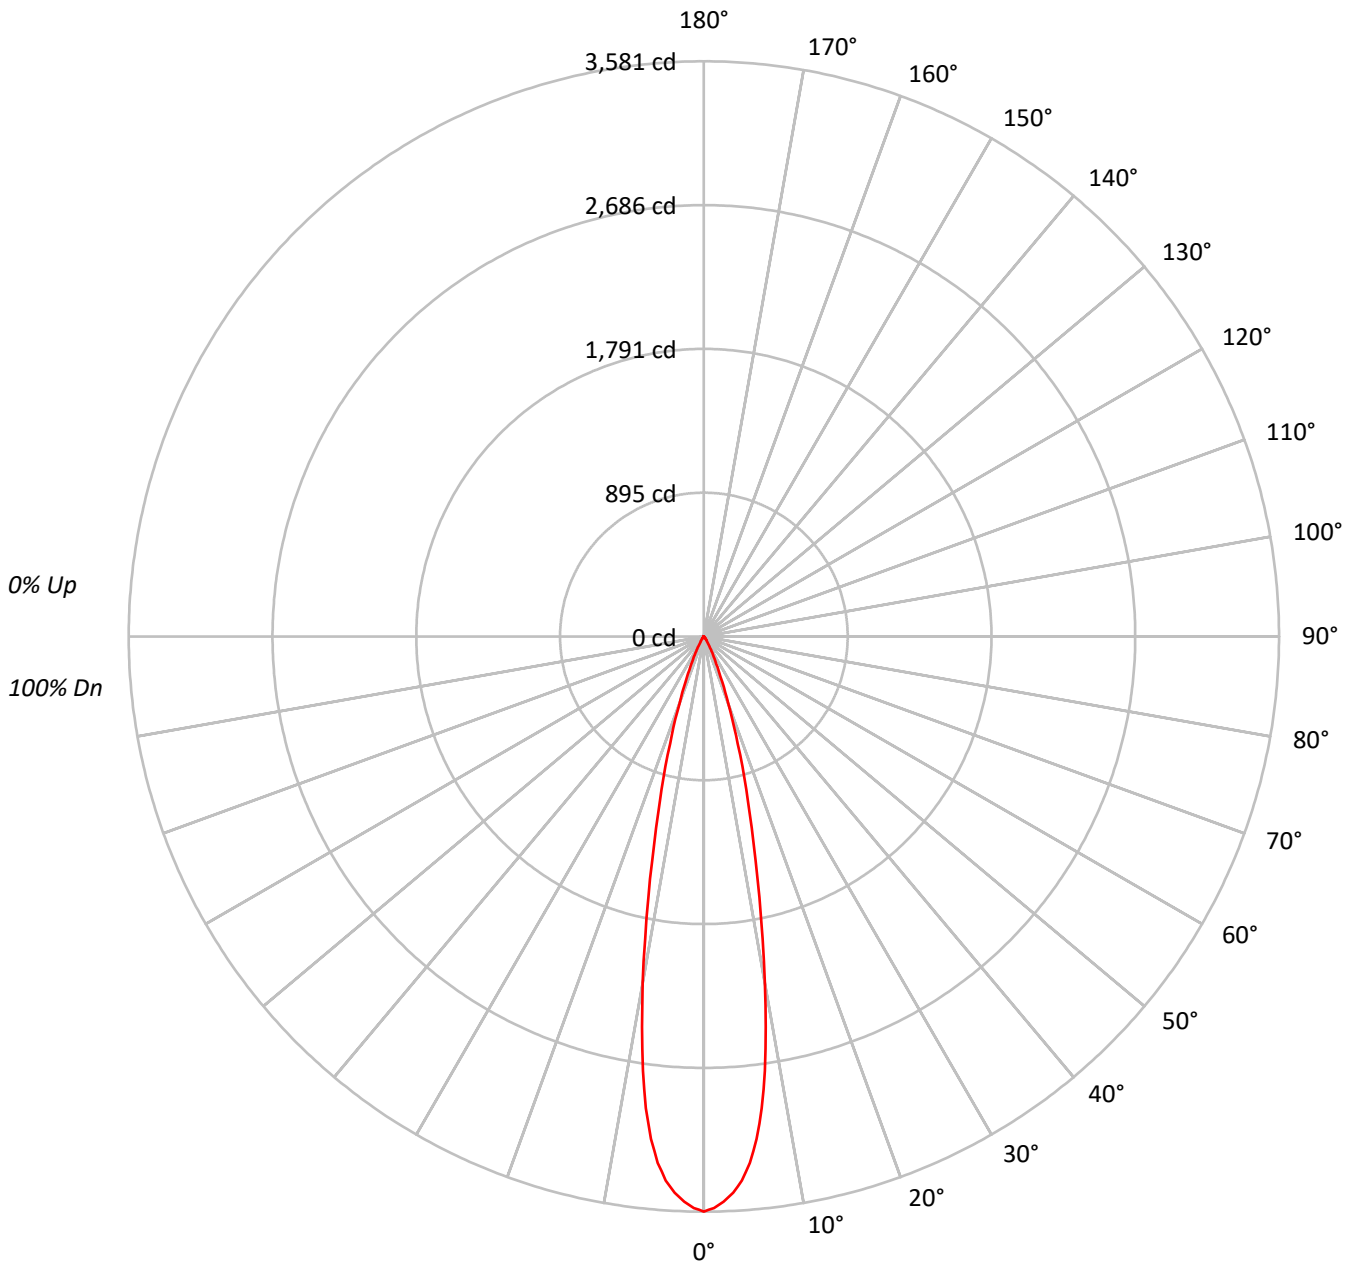



TEST NUMBER: P315024

CATALOG NUMBER: LDA2B10NFL9727D010 PINW1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100													
1	115	113	111	110	113	111	109	108	107	106	105	103	102	102	100	99	99	97	97	97	97	97	97	97	97	97	97	97	97	97	97	97													
2	112	108	105	103	110	107	104	102	103	101	100	101	99	98	98	97	96	94	94	94	94	94	94	94	94	94	94	94	94	94	94	94													
3	108	104	100	98	107	103	99	97	100	98	95	98	96	94	96	94	93	91	91	91	91	91	91	91	91	91	91	91	91	91	91	91	91												
4	105	100	96	94	104	99	96	93	97	94	92	95	93	91	94	92	90	89	89	89	89	89	89	89	89	89	89	89	89	89	89	89	89												
5	102	97	93	90	101	96	92	90	94	91	89	93	90	88	92	89	87	86	86	86	86	86	86	86	86	86	86	86	86	86	86	86	86												
6	100	94	90	87	98	93	89	87	92	89	86	91	88	86	89	87	85	84	84	84	84	84	84	84	84	84	84	84	84	84	84	84	84	84											
7	97	91	87	84	96	90	87	84	89	86	84	88	85	83	87	85	83	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82											
8	95	88	85	82	94	88	84	82	87	84	81	86	83	81	85	83	81	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80											
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78	78											
10	90	84	80	78	90	84	80	78	83	80	77	82	79	77	82	79	77	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1766679
5°	1629311
10°	1097932
15°	541309
20°	231221
25°	90909
30°	35776
35°	15659
40°	7535
45°	3628
50°	1996
55°	1118
60°	691
65°	350
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P315024

CATALOG NUMBER: LDA2B10NFL9727D010 PINW1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	278.7	40.4
10°-20°	300.1	43.5
20°-30°	86.7	12.6
30°-40°	18.3	2.6
40°-50°	4.5	0.7
50°-60°	1.3	0.2
60°-70°	0.4	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	665.5	96.4
0°-40°	683.8	99.1
0°-60°	689.6	99.9
0°-90°	690.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	690.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3581	
5°	3290	279
15°	1060	300
25°	167	87
35°	26	18
45°	5	4
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P315024

CATALOG NUMBER: LDA2B10NFL9727D010 PINW1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	3580.9
1°	3558.4
2°	3520.3
3°	3468.9
4°	3396.0
5°	3289.9
6°	3146.7
7°	2959.8
8°	2730.0
9°	2462.1
10°	2191.6
11°	1918.2
12°	1660.1
13°	1430.9
14°	1229.4
15°	1059.8
17.5°	700.5
20°	440.4
22.5°	270.8
25°	167.0
27.5°	101.9
30°	62.8
32.5°	39.7
35°	26.0
37.5°	17.3
40°	11.7
42.5°	8.1
45°	5.2
47.5°	3.3
50°	2.6
52.5°	2.0
55°	1.3
57.5°	1.0
60°	0.7
62.5°	0.7
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.3
80°	0.0
82.5°	0.0



TEST NUMBER: P315024

CATALOG NUMBER: LDA2B10NFL9727D010 PINW1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)