

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280531

Luminaire Tested: **LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P280531
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in ADJ spun Refl, Self-Flanged, LI
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 867.4 lumens
Efficiency: N/A
Efficacy: 86.7 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P280531

CATALOG NUMBER: LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI

Luminous Intensity Polar Plot

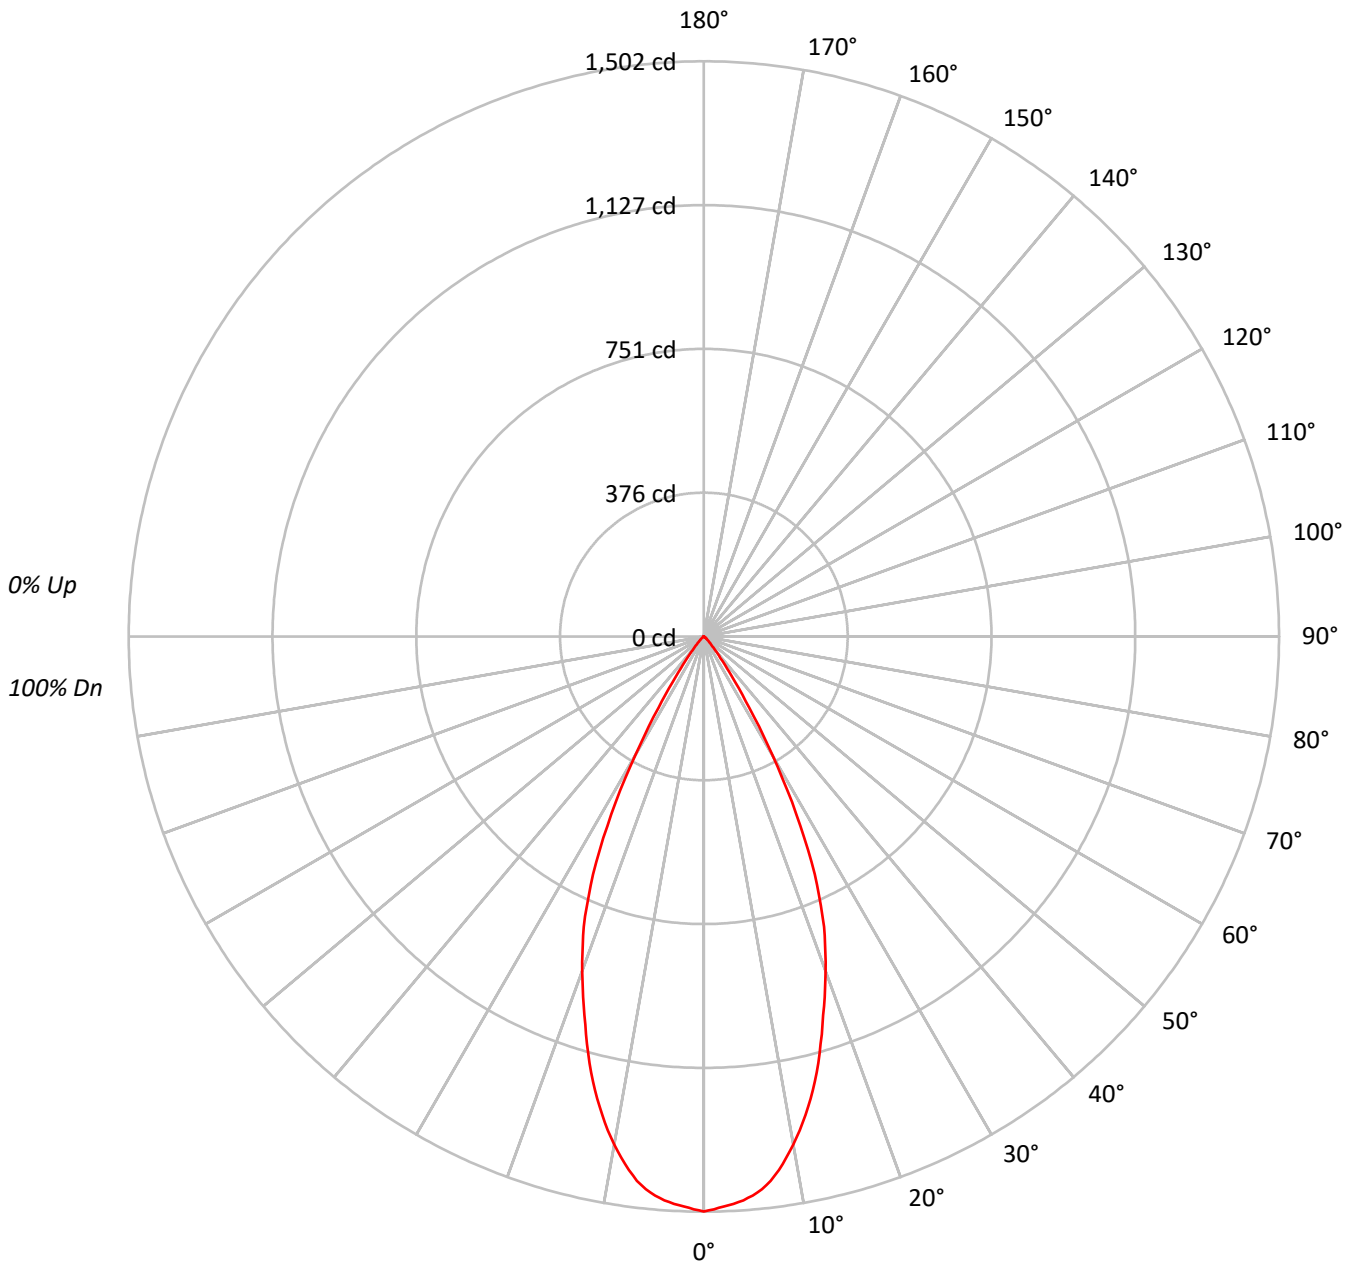



TEST NUMBER: P280531

CATALOG NUMBER: LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85			
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76			
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72			
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69			
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65			
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62			
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	740832
5°	725734
10°	674910
15°	589270
20°	487853
25°	373162
30°	204175
35°	75587
40°	26148
45°	11791
50°	5526
55°	2752
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P280531

CATALOG NUMBER: LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.2	15.7
10°-20°	318.9	36.8
20°-30°	301.4	34.7
30°-40°	92.8	10.7
40°-50°	14.7	1.7
50°-60°	3.1	0.4
60°-70°	0.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	756.4	87.2
0°-40°	849.2	97.9
0°-60°	866.9	99.9
0°-90°	867.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	867.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1502	
5°	1465	136
15°	1154	319
25°	686	301
35°	126	93
45°	17	15
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280531

CATALOG NUMBER: LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1501.6
1°	1496.0
2°	1489.2
3°	1483.5
4°	1476.3
5°	1465.4
6°	1451.4
7°	1432.5
8°	1407.1
9°	1377.7
10°	1347.2
11°	1313.4
12°	1277.6
13°	1238.6
14°	1197.9
15°	1153.7
17.5°	1036.6
20°	929.2
22.5°	820.2
25°	685.5
27.5°	522.9
30°	358.4
32.5°	220.0
35°	125.5
37.5°	70.0
40°	40.6
42.5°	25.3
45°	16.9
47.5°	11.3
50°	7.2
52.5°	4.8
55°	3.2
57.5°	2.0
60°	0.8
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280531

CATALOG NUMBER: LDA2B10D2WD010 EU2B10WFL55D2W 2LBAD1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)