

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P497478

Luminaire Tested: **LDA2B158030R35D010 2LBD1GPH**

Issue Date: 3/12/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P497478  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-27)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/12/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B158030R35D010 2LBD1GPH  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1434.2 lumens  
Efficiency: N/A  
Efficacy: 101.7 lumens/watt  
Spacing Criteria (0/90/45): 0.55 / 0.55 / 0.5  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P497478

CATALOG NUMBER: LDA2B158030R35D010 2LBD1GPH

### Luminous Intensity Polar Plot

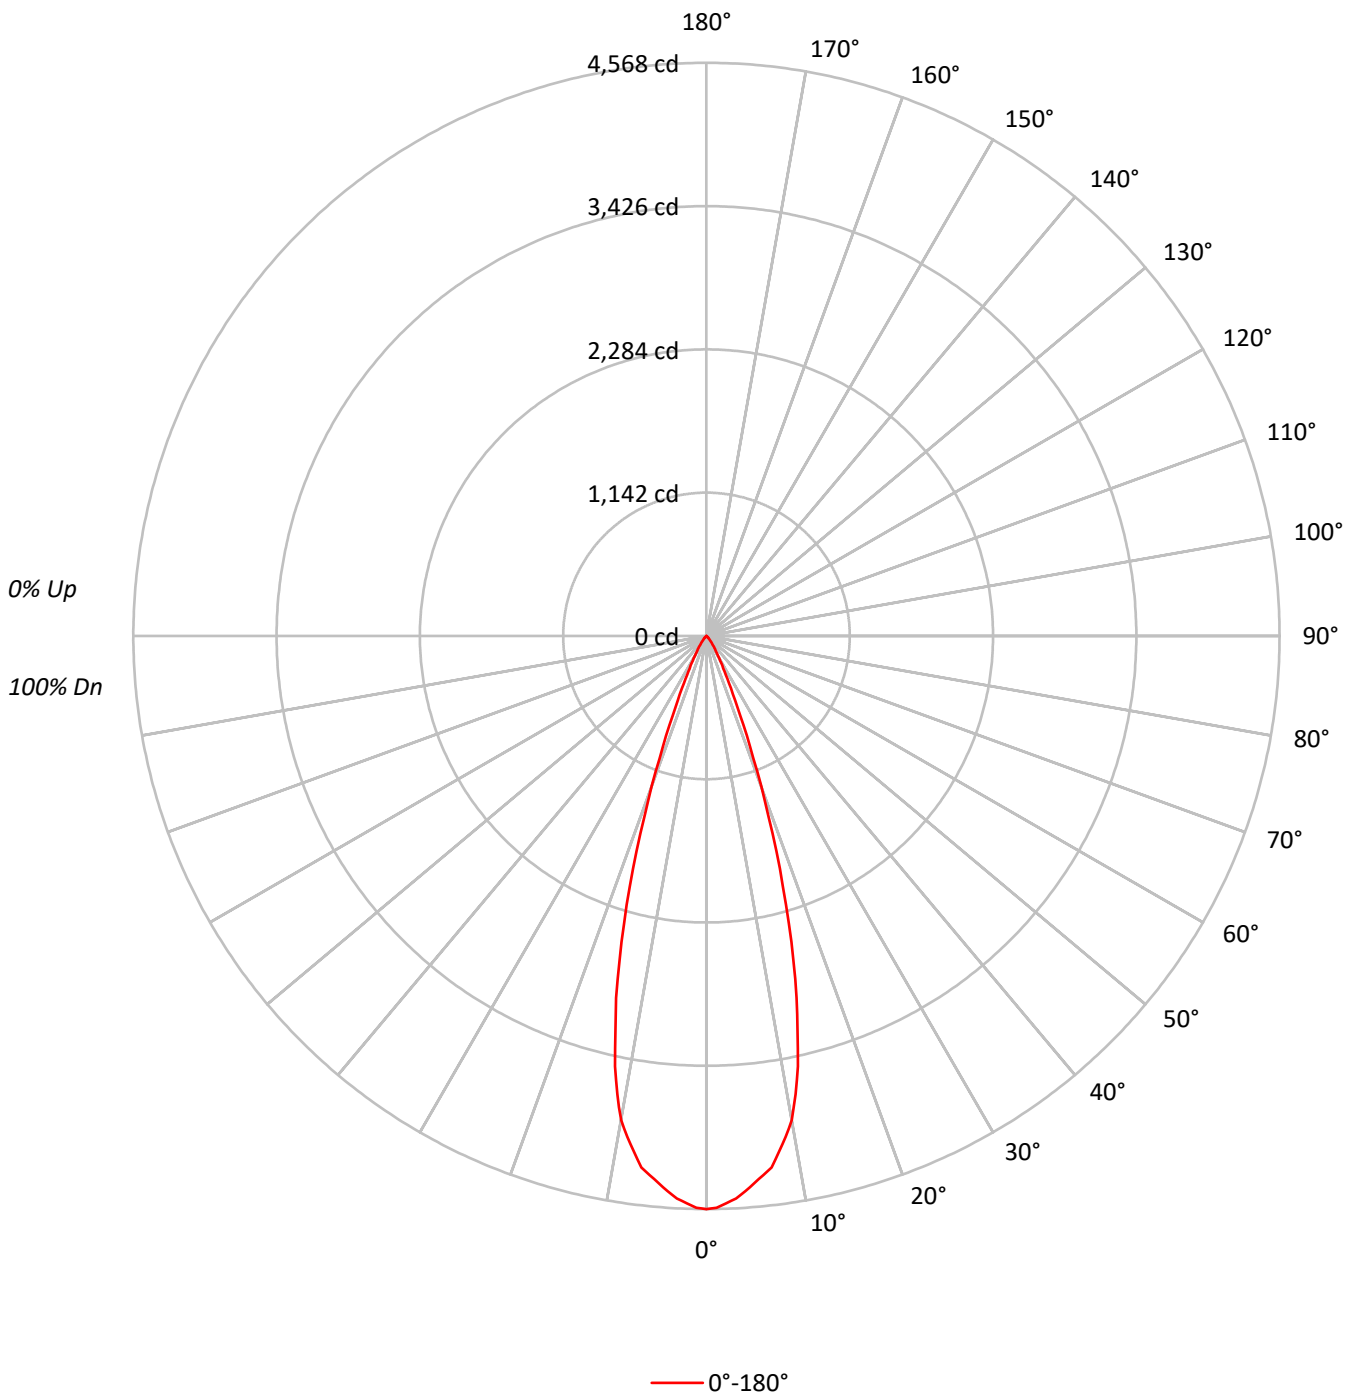



TEST NUMBER: P497478

CATALOG NUMBER: LDA2B158030R35D010 2LBD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	109	112	111	109	107	107	105	104		103	102	101		100	99	98	96
2	111	107	104	101	109	106	103	100	102	100	98		100	98	96		97	95	94	93
3	107	102	99	96	105	101	98	95	99	96	93		96	94	92		94	92	91	89
4	104	98	94	91	102	97	93	90	95	92	89		93	90	88		91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	86		90	87	85		89	86	84	83
6	97	91	86	83	96	90	86	83	89	85	82		87	84	82		86	83	81	80
7	94	87	83	80	93	87	83	80	86	82	79		85	81	79		84	81	79	78
8	91	84	80	77	90	84	80	77	83	79	77		82	79	76		81	78	76	75
9	89	82	77	75	88	81	77	74	80	77	74		80	76	74		79	76	74	73
10	86	79	75	72	85	79	75	72	78	74	72		77	74	72		77	74	72	71

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2253874
5°	2168139
10°	1963613
15°	1366860
20°	669826
25°	249863
30°	109721
35°	53362
40°	24473
45°	13257
50°	6447
55°	1806
60°	691
65°	817
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P497478

CATALOG NUMBER: LDA2B158030R35D010 2LBD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	404.5	28.2
10°-20°	709.0	49.4
20°-30°	241.6	16.8
30°-40°	60.1	4.2
40°-50°	15.5	1.1
50°-60°	2.8	0.2
60°-70°	0.6	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1355.1	94.5
0°-40°	1415.2	98.7
0°-60°	1433.6	100.0
0°-90°	1434.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1434.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4568	
5°	4378	404
15°	2676	709
25°	459	242
35°	89	60
45°	19	16
55°	2	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P497478

CATALOG NUMBER: LDA2B158030R35D010 2LBD1GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4568.4
1°	4559.2
2°	4524.1
3°	4490.3
4°	4436.2
5°	4377.9
6°	4320.9
7°	4267.5
8°	4152.2
9°	4040.5
10°	3919.6
11°	3721.3
12°	3506.2
13°	3229.3
14°	2972.7
15°	2676.1
16°	2386.5
17°	2084.9
18°	1803.0
19°	1517.6
20°	1275.8
21°	1045.3
22.5°	766.9
23°	688.9
24°	562.3
25°	459.0
26°	379.6
27°	317.0
28°	267.1
29°	225.6
30°	192.6
32.5°	130.7
35°	88.6
37.5°	59.7
40°	38.0
42.5°	26.0
45°	19.0
47.5°	13.4
50°	8.4
52.5°	4.9
55°	2.1
57.5°	1.4
60°	0.7
62.5°	0.7
65°	0.7



TEST NUMBER: P497478

CATALOG NUMBER: LDA2B158030R35D010 2LBD1GPH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.7
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)