

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280590

Luminaire Tested: **LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P280590  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH  
Description: PORTFOLIO 2IN ADJ 1500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND  
2in ADJ spun Refl w/lens Self-Flanged, WMH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1540.7 lumens  
Efficiency: N/A  
Efficacy: 109.3 lumens/watt  
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P280590

CATALOG NUMBER: LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH

### Luminous Intensity Polar Plot

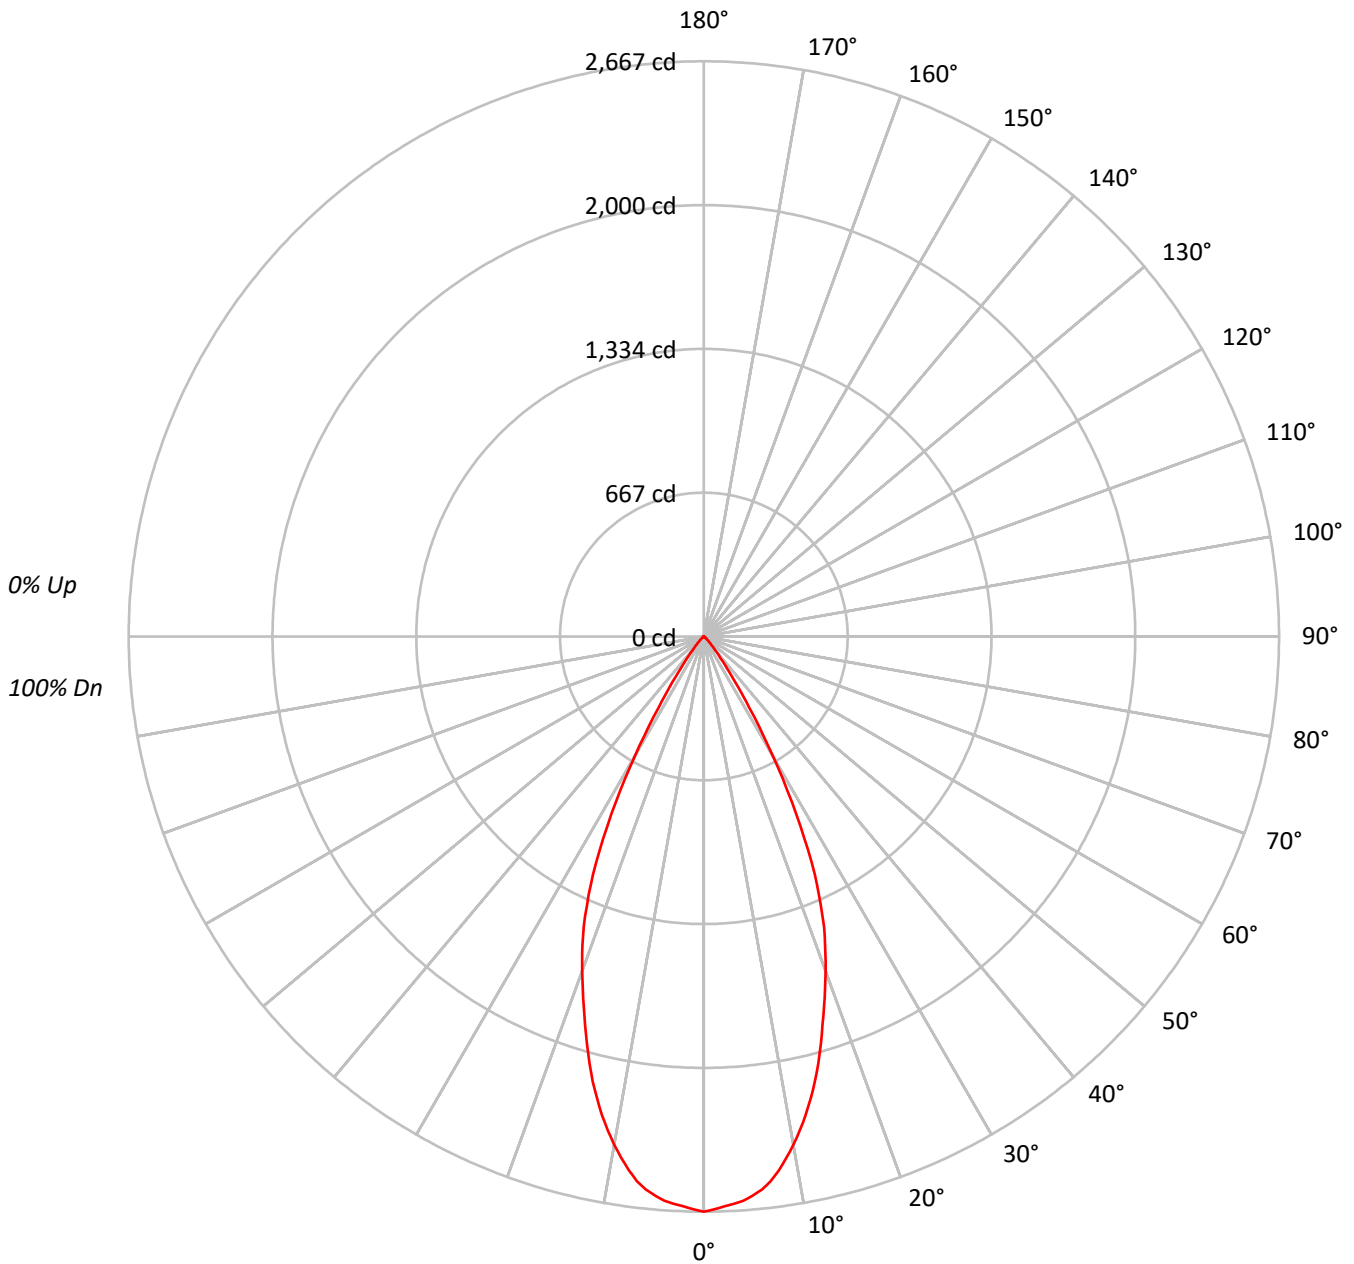



TEST NUMBER: P280590

CATALOG NUMBER: LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76		
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72		
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65		
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62		
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1315845
5°	1289027
10°	1198677
15°	1046610
20°	866501
25°	662709
30°	362662
35°	134249
40°	46500
45°	20932
50°	9901
55°	4903
60°	1381
65°	817
70°	1010
75°	0
80°	0
85°	0



TEST NUMBER: P280590

CATALOG NUMBER: LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	241.9	15.7
10°-20°	566.3	36.8
20°-30°	535.3	34.7
30°-40°	164.8	10.7
40°-50°	26.0	1.7
50°-60°	5.5	0.4
60°-70°	0.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1343.5	87.2
0°-40°	1508.3	97.9
0°-60°	1539.8	99.9
0°-90°	1540.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1540.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2667	
5°	2603	242
15°	2049	566
25°	1217	535
35°	223	165
45°	30	26
55°	6	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280590

CATALOG NUMBER: LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2667.1
1°	2657.1
2°	2644.9
3°	2634.9
4°	2622.1
5°	2602.8
6°	2577.8
7°	2544.2
8°	2499.2
9°	2447.0
10°	2392.7
11°	2332.7
12°	2269.1
13°	2199.8
14°	2127.7
15°	2049.1
17.5°	1841.2
20°	1650.4
22.5°	1456.8
25°	1217.4
27.5°	928.8
30°	636.6
32.5°	390.8
35°	222.9
37.5°	124.3
40°	72.2
42.5°	45.0
45°	30.0
47.5°	20.0
50°	12.9
52.5°	8.6
55°	5.7
57.5°	3.6
60°	1.4
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280590

CATALOG NUMBER: LDA2B158035D010 EU2B15WFL558035 2LBALD1WMH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)