

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P497815

Luminaire Tested: **LDA2B158035R70D010 2LBDL1LI**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P497815  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B158035R70D010 2LBDL1LI  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3500K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1290.4 lumens  
Efficiency: N/A  
Efficacy: 91.5 lumens/watt  
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P497815

CATALOG NUMBER: LDA2B158035R70D010 2LBDL1LI

### Luminous Intensity Polar Plot

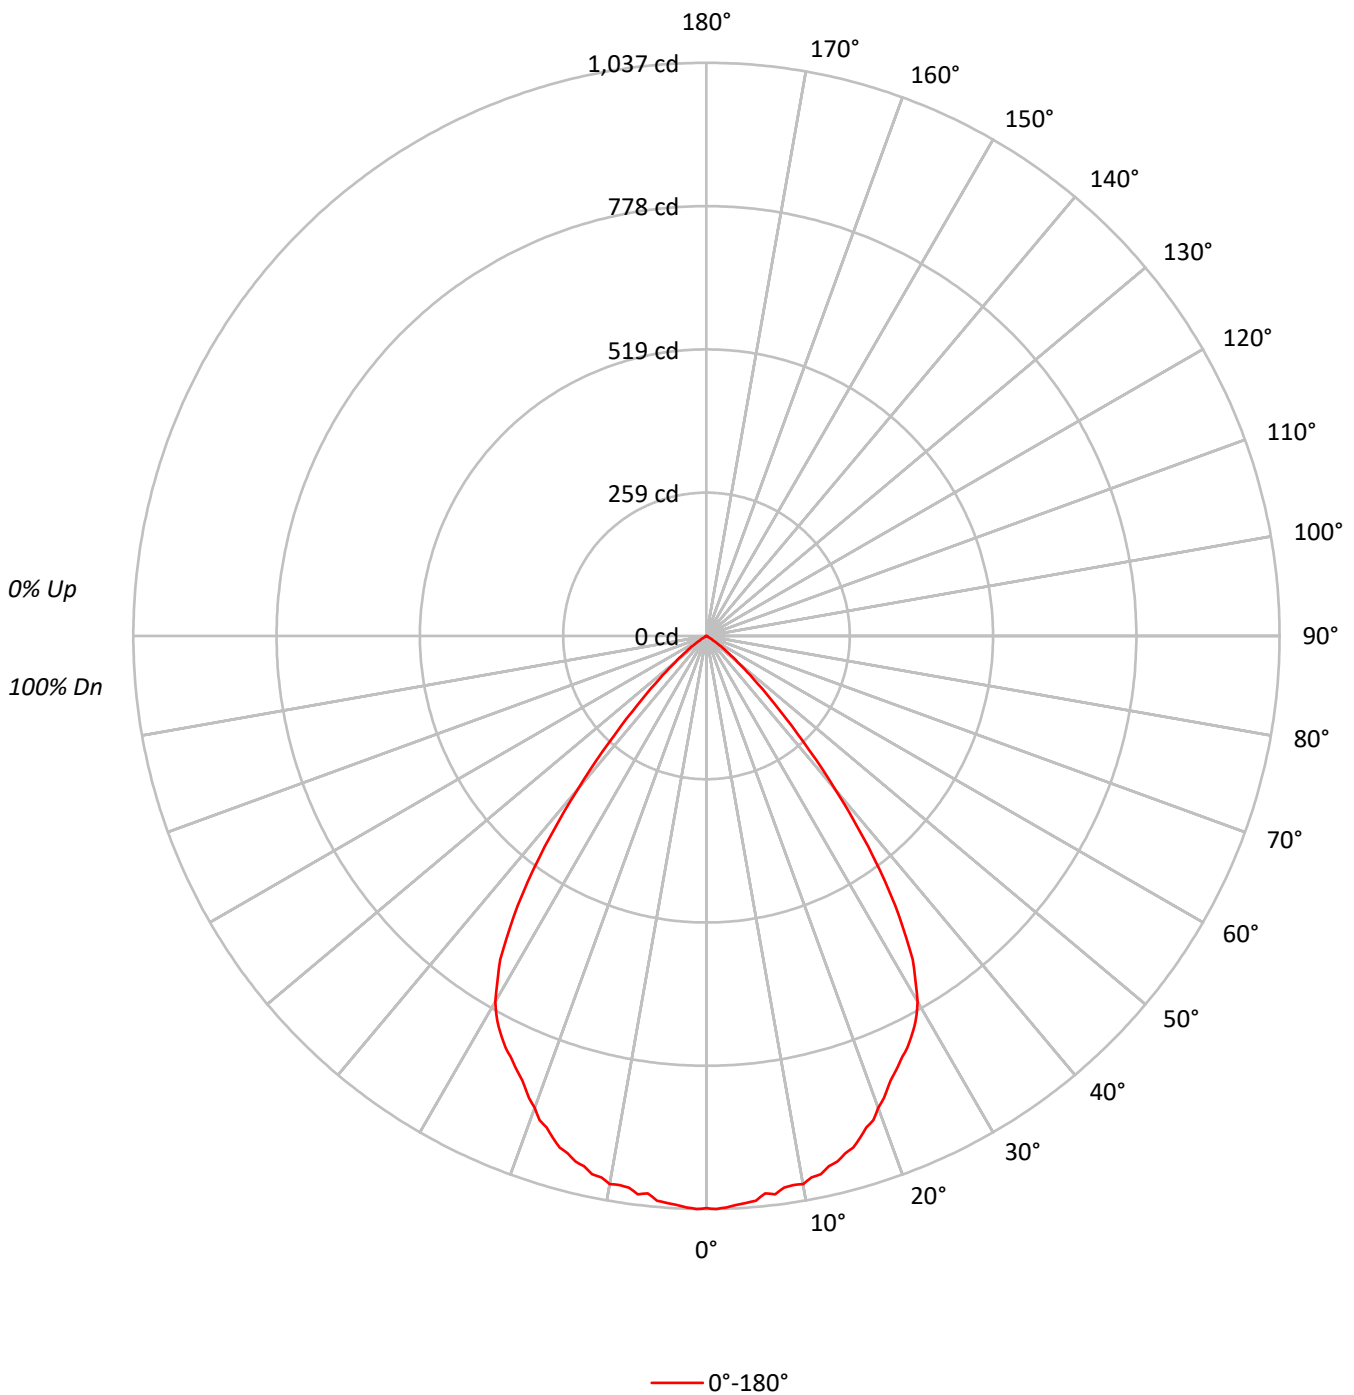



TEST NUMBER: P497815

CATALOG NUMBER: LDA2B158035R70D010 2LBDL1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82		87	84	81		85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63		71	66	63		70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58		66	61	58		65	61	57	56
8	75	65	58	54	74	64	58	54	63	58	54		62	57	53		61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57	53	49	48
10	68	57	51	46	66	57	50	46	56	50	46		55	50	46		54	49	46	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	510876
5°	507925
10°	504530
15°	495136
20°	477247
25°	456940
30°	435239
35°	359142
40°	233464
45°	121961
50°	56721
55°	20816
60°	2072
65°	1634
70°	1010
75°	1334
80°	0
85°	0



TEST NUMBER: P497815

CATALOG NUMBER: LDA2B158035R70D010 2LBDL1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	97.0	7.5
10°-20°	272.4	21.1
20°-30°	386.7	30.0
30°-40°	361.6	28.0
40°-50°	145.4	11.3
50°-60°	25.4	2.0
60°-70°	1.2	0.1
70°-80°	0.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	756.1	58.6
0°-40°	1117.7	86.6
0°-60°	1288.5	99.9
0°-90°	1290.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1290.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1036	
5°	1026	97
15°	969	272
25°	839	387
35°	596	362
45°	175	145
55°	24	25
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P497815

CATALOG NUMBER: LDA2B158035R70D010 2LBDL1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1035.5
1°	1037.0
2°	1034.8
3°	1030.6
4°	1028.4
5°	1025.6
6°	1014.2
7°	1017.8
8°	1007.8
9°	1005.7
10°	1007.1
11°	997.9
12°	995.7
13°	984.4
14°	980.1
15°	969.4
16°	963.0
17°	950.2
18°	935.3
19°	926.8
20°	909.0
21°	895.5
22.5°	870.6
23°	864.3
24°	852.2
25°	839.4
26°	829.4
27°	815.2
28°	801.0
29°	783.9
30°	764.0
32.5°	694.4
35°	596.3
37.5°	480.5
40°	362.5
42.5°	258.7
45°	174.8
47.5°	115.1
50°	73.9
52.5°	46.2
55°	24.2
57.5°	7.8
60°	2.1
62.5°	1.4
65°	1.4



TEST NUMBER: P497815

CATALOG NUMBER: LDA2B158035R70D010 2LBDL1LI

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)