

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P497822

Luminaire Tested: **LDA2B158035R70D010 2LBDLC1MB**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P497822
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B158035R70D010 2LBDLC1MB
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3500K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1393.7 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P497822

CATALOG NUMBER: LDA2B158035R70D010 2LBDLC1MB

Luminous Intensity Polar Plot

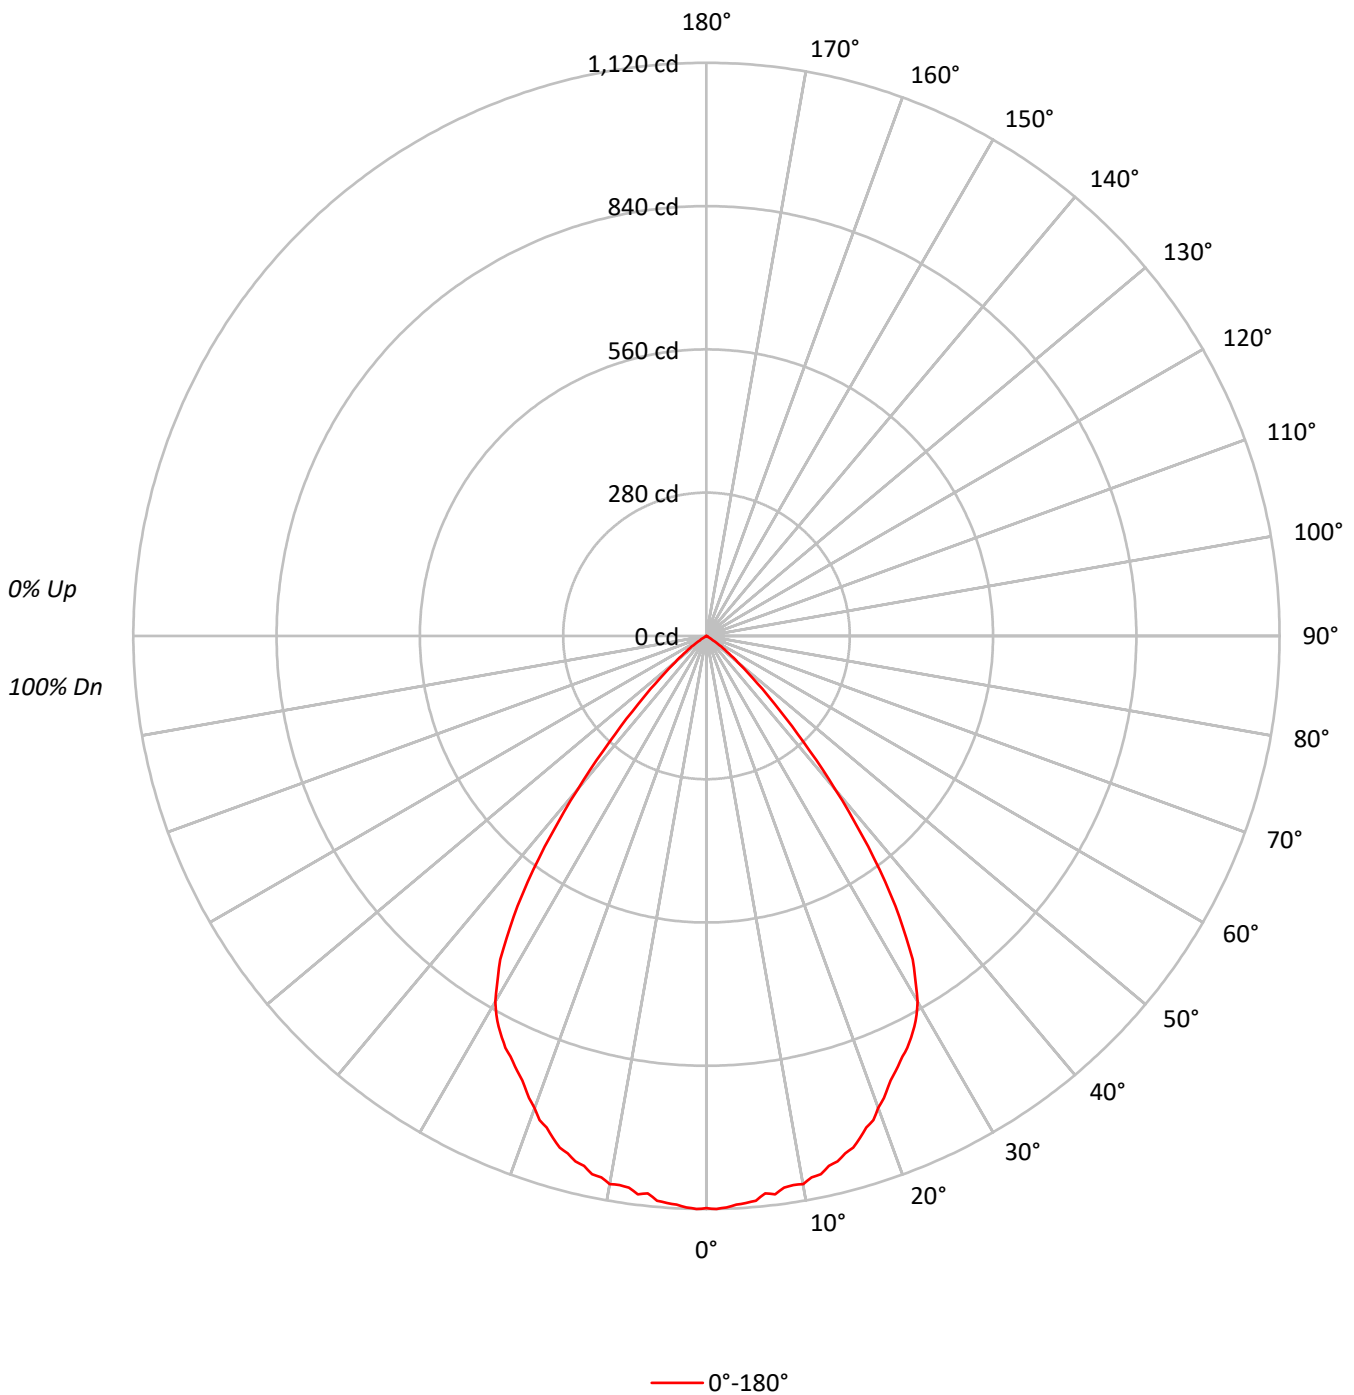



TEST NUMBER: P497822

CATALOG NUMBER: LDA2B158035R70D010 2LBDLC1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63	71	66	63	70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56
8	75	65	58	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48
10	68	57	51	46	66	57	50	46	56	50	46	55	50	46	54	49	46	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	551776
5°	548584
10°	544908
15°	534772
20°	515469
25°	493521
30°	470104
35°	387871
40°	252141
45°	131729
50°	61249
55°	22450
60°	2269
65°	1751
70°	1154
75°	1525
80°	0
85°	0



TEST NUMBER: P497822

CATALOG NUMBER: LDA2B158035R70D010 2LBDLC1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.8	7.5
10°-20°	294.2	21.1
20°-30°	417.6	30.0
30°-40°	390.5	28.0
40°-50°	157.1	11.3
50°-60°	27.5	2.0
60°-70°	1.3	0.1
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	816.6	58.6
0°-40°	1207.1	86.6
0°-60°	1391.6	99.9
0°-90°	1393.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1393.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1118	
5°	1108	105
15°	1047	294
25°	907	418
35°	644	391
45°	189	157
55°	26	27
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P497822

CATALOG NUMBER: LDA2B158035R70D010 2LBDLC1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1118.4
1°	1120.0
2°	1117.6
3°	1113.0
4°	1110.7
5°	1107.7
6°	1095.4
7°	1099.2
8°	1088.5
9°	1086.2
10°	1087.7
11°	1077.7
12°	1075.4
13°	1063.1
14°	1058.5
15°	1047.0
16°	1040.1
17°	1026.3
18°	1010.2
19°	1001.0
20°	981.8
21°	967.2
22.5°	940.3
23°	933.4
24°	920.4
25°	906.6
26°	895.8
27°	880.5
28°	865.1
29°	846.7
30°	825.2
32.5°	750.0
35°	644.0
37.5°	518.9
40°	391.5
42.5°	279.4
45°	188.8
47.5°	124.4
50°	79.8
52.5°	49.9
55°	26.1
57.5°	8.4
60°	2.3
62.5°	1.5
65°	1.5



TEST NUMBER: P497822

CATALOG NUMBER: LDA2B158035R70D010 2LBDLC1MB

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)