

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280611

Luminaire Tested: **LDA2B158050D010 EU2B15WFL558050 2LBAD1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P280611
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B158050D010 EU2B15WFL558050 2LBAD1LI
Description: PORTFOLIO 2IN ADJ 1500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in ADJ spun Refl, Self-Flanged, LI
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1613.1 lumens
Efficiency: N/A
Efficacy: 114.4 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P280611

CATALOG NUMBER: LDA2B158050D010 EU2B15WFL558050 2LBAD1LI

Luminous Intensity Polar Plot

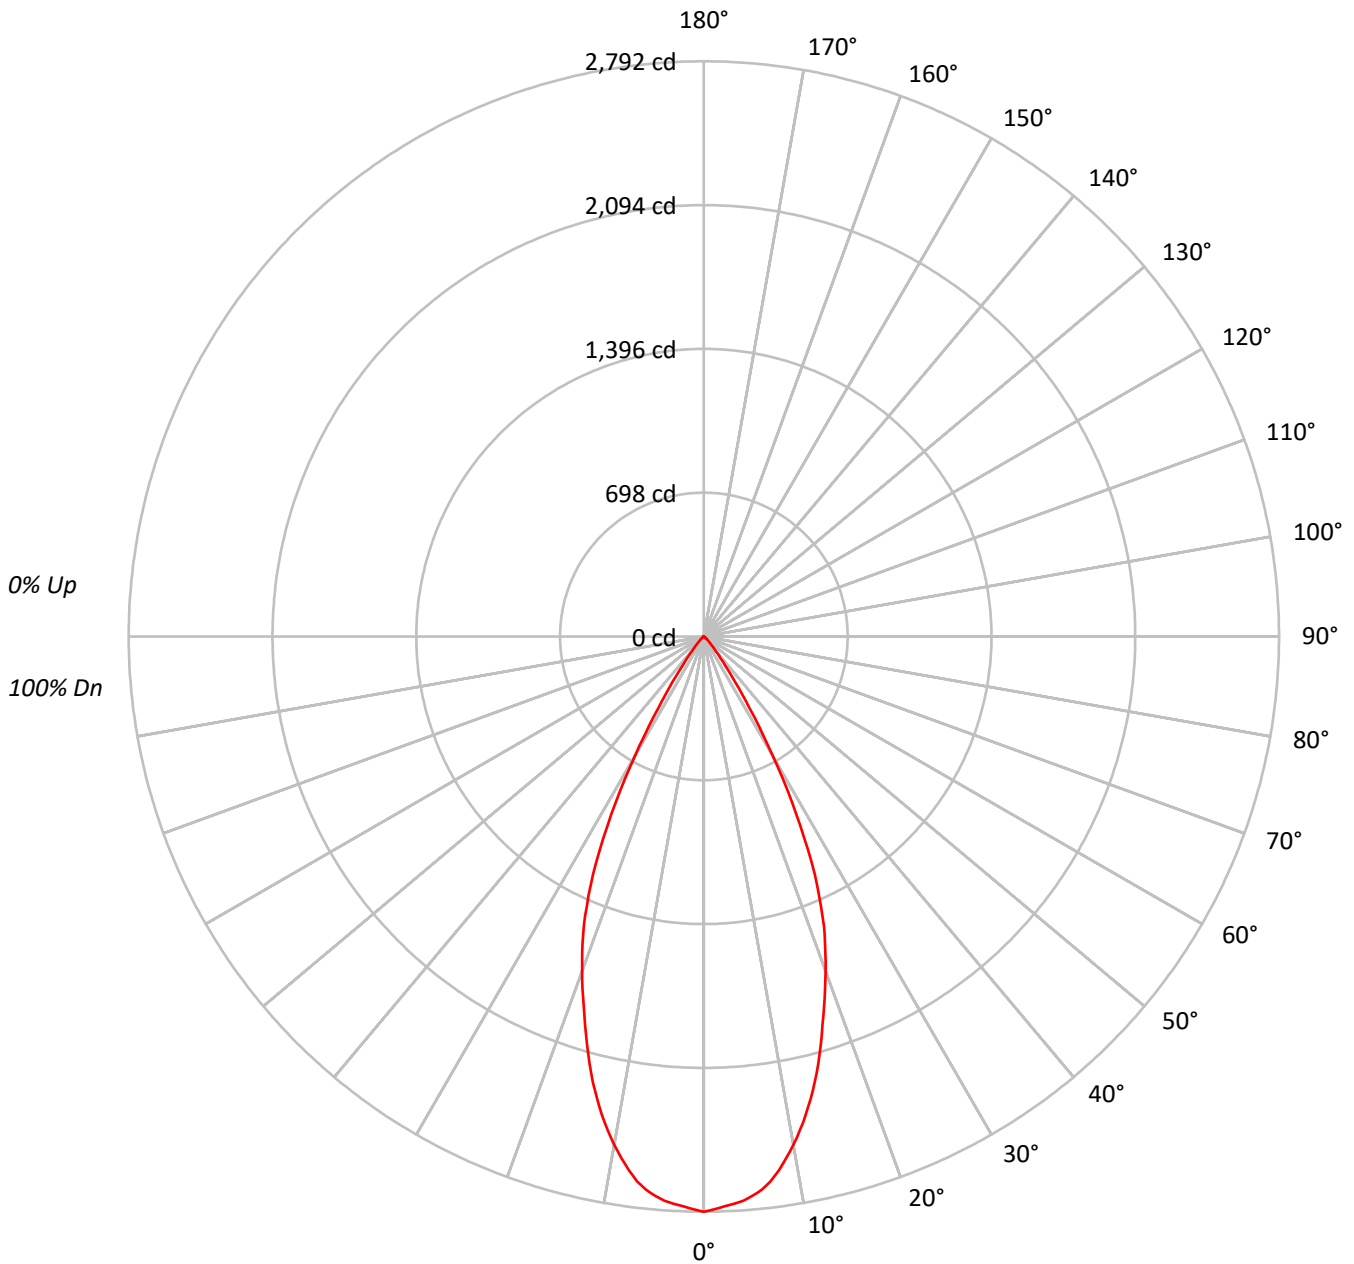



TEST NUMBER: P280611

CATALOG NUMBER: LDA2B158050D010 EU2B15WFL558050 2LBAD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76		
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72		
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65		
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62		
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1377713
5°	1349645
10°	1255037
15°	1095797
20°	907243
25°	693901
30°	379695
35°	140573
40°	48689
45°	21908
50°	10362
55°	5161
60°	1480
65°	817
70°	1010
75°	0
80°	0
85°	0



TEST NUMBER: P280611

CATALOG NUMBER: LDA2B158050D010 EU2B15WFL558050 2LBAD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	253.2	15.7
10°-20°	593.0	36.8
20°-30°	560.5	34.7
30°-40°	172.5	10.7
40°-50°	27.3	1.7
50°-60°	5.8	0.4
60°-70°	0.8	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1406.7	87.2
0°-40°	1579.2	97.9
0°-60°	1612.2	99.9
0°-90°	1613.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1613.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2792	
5°	2725	253
15°	2145	593
25°	1275	560
35°	233	173
45°	31	27
55°	6	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280611

CATALOG NUMBER: LDA2B158050D010 EU2B15WFL558050 2LBAD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2792.5
1°	2782.0
2°	2769.3
3°	2758.8
4°	2745.4
5°	2725.2
6°	2699.0
7°	2663.8
8°	2616.7
9°	2562.1
10°	2505.2
11°	2442.4
12°	2375.8
13°	2303.3
14°	2227.7
15°	2145.4
17.5°	1927.7
20°	1728.0
22.5°	1525.3
25°	1274.7
27.5°	972.5
30°	666.5
32.5°	409.2
35°	233.4
37.5°	130.2
40°	75.6
42.5°	47.1
45°	31.4
47.5°	20.9
50°	13.5
52.5°	9.0
55°	6.0
57.5°	3.7
60°	1.5
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280611

CATALOG NUMBER: LDA2B158050D010 EU2B15WFL558050 2LBAD1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)