

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P498216

Luminaire Tested: **LDA2B158050R65D010 2LBD1MMS**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P498216  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-66)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/8/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B158050R65D010 2LBD1MMS  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 5000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1488.2 lumens  
Efficiency: N/A  
Efficacy: 105.5 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.95  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P498216

CATALOG NUMBER: LDA2B158050R65D010 2LBD1MMS

### Luminous Intensity Polar Plot

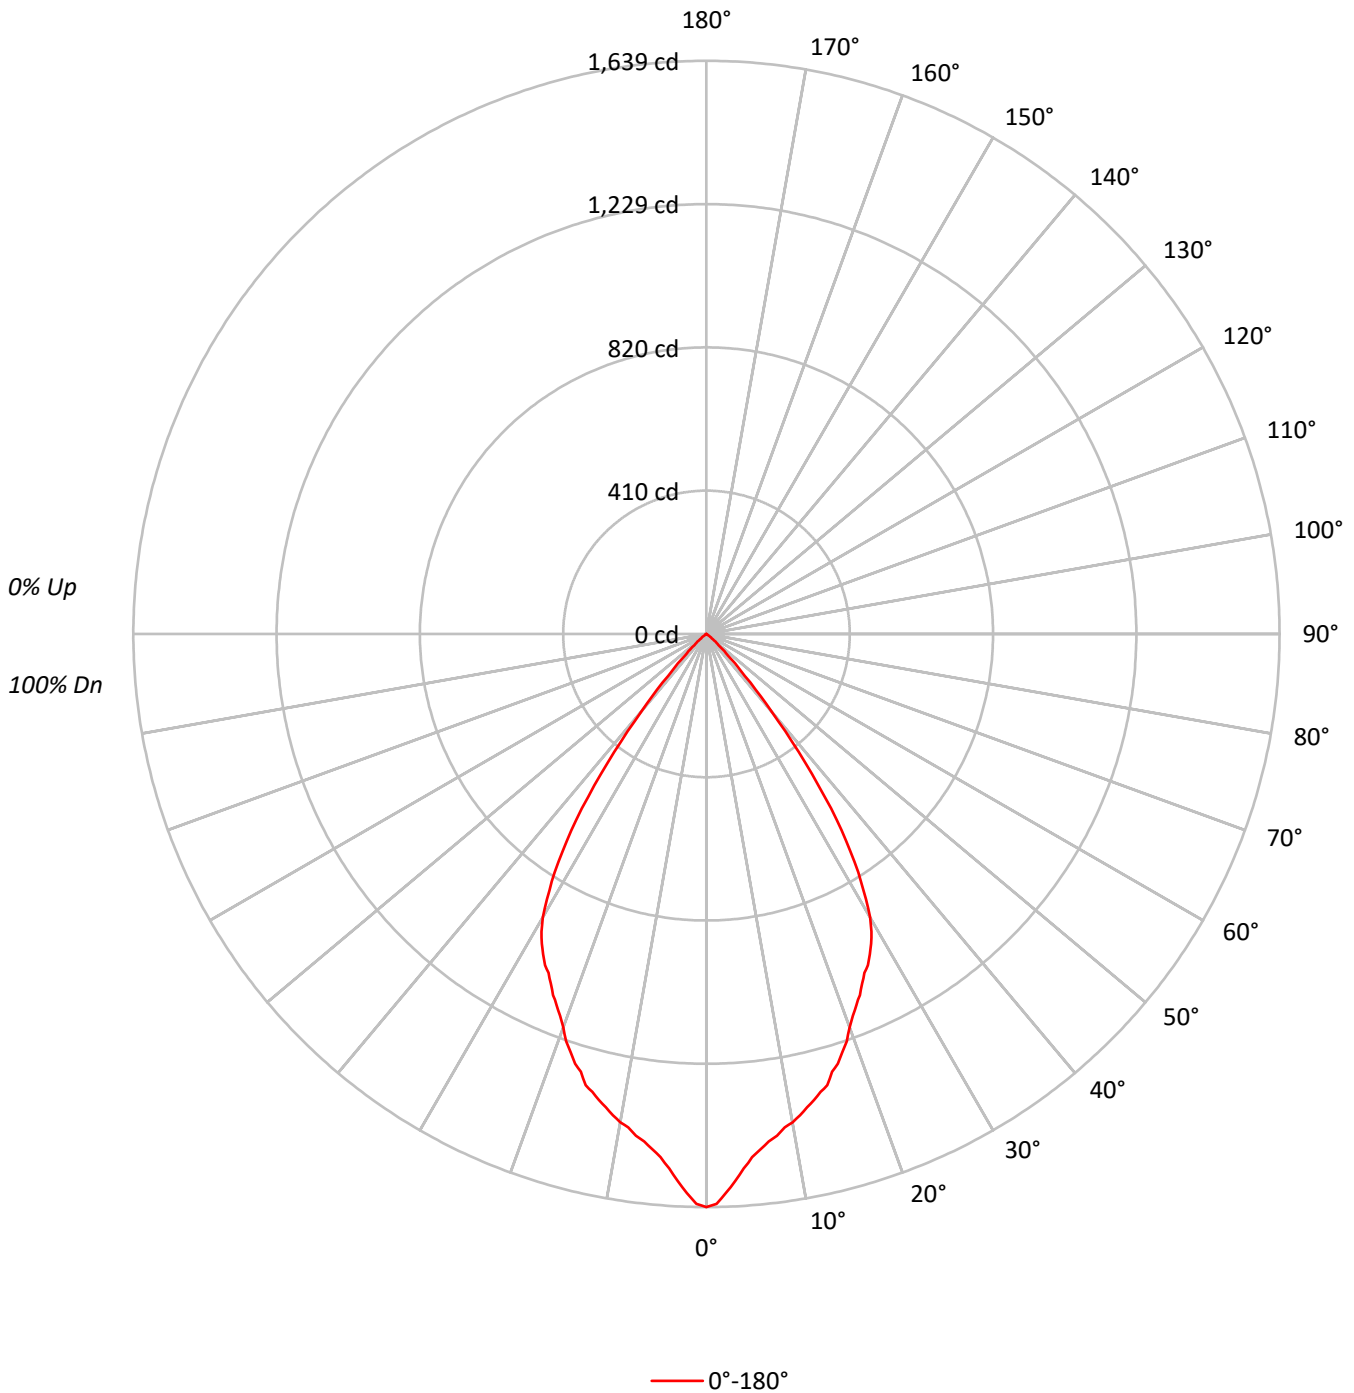



TEST NUMBER: P498216

CATALOG NUMBER: LDA2B158050R65D010 2LBD1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75
5	92	83	78	73	90	82	77	73	81	76	72	79	75	72	77	74	71	69
6	87	78	72	68	86	77	72	67	76	71	67	74	70	66	73	69	66	65
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56
9	75	65	59	55	73	64	58	54	63	58	54	62	58	54	61	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	808620
5°	743662
10°	710630
15°	682485
20°	628612
25°	582143
30°	533453
35°	391785
40°	185547
45°	61050
50°	19726
55°	2494
60°	1480
65°	817
70°	1010
75°	0
80°	0
85°	0



TEST NUMBER: P498216

CATALOG NUMBER: LDA2B158050R65D010 2LBD1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.1	9.5
10°-20°	371.6	25.0
20°-30°	492.9	33.1
30°-40°	390.0	26.2
40°-50°	85.2	5.7
50°-60°	6.3	0.4
60°-70°	0.8	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1005.6	67.6
0°-40°	1395.6	93.8
0°-60°	1487.1	99.9
0°-90°	1488.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1488.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1639	
5°	1502	141
15°	1336	372
25°	1069	493
35°	650	390
45°	88	85
55°	3	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P498216

CATALOG NUMBER: LDA2B158050R65D010 2LBD1MMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1639.0
1°	1630.2
2°	1600.0
3°	1567.0
4°	1532.4
5°	1501.6
6°	1481.7
7°	1461.9
8°	1448.6
9°	1428.8
10°	1418.5
11°	1402.3
12°	1384.0
13°	1367.8
14°	1349.4
15°	1336.2
16°	1302.4
17°	1285.5
18°	1257.5
19°	1231.8
20°	1197.3
21°	1169.3
22.5°	1132.6
23°	1122.3
24°	1094.4
25°	1069.4
26°	1054.0
27°	1028.2
28°	1003.2
29°	973.1
30°	936.4
32.5°	808.5
35°	650.5
37.5°	463.8
40°	288.1
42.5°	162.4
45°	87.5
47.5°	47.0
50°	25.7
52.5°	11.0
55°	2.9
57.5°	1.5
60°	1.5
62.5°	0.7
65°	0.7



TEST NUMBER: P498216

CATALOG NUMBER: LDA2B158050R65D010 2LBD1MMS

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)