

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P498222

Luminaire Tested: **LDA2B158050R65D010 2LBDL1GPH**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P498222  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-68)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B158050R65D010 2LBDL1GPH  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 5000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1375.8 lumens  
Efficiency: N/A  
Efficacy: 97.6 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.94  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P498222

CATALOG NUMBER: LDA2B158050R65D010 2LBDL1GPH

### Luminous Intensity Polar Plot

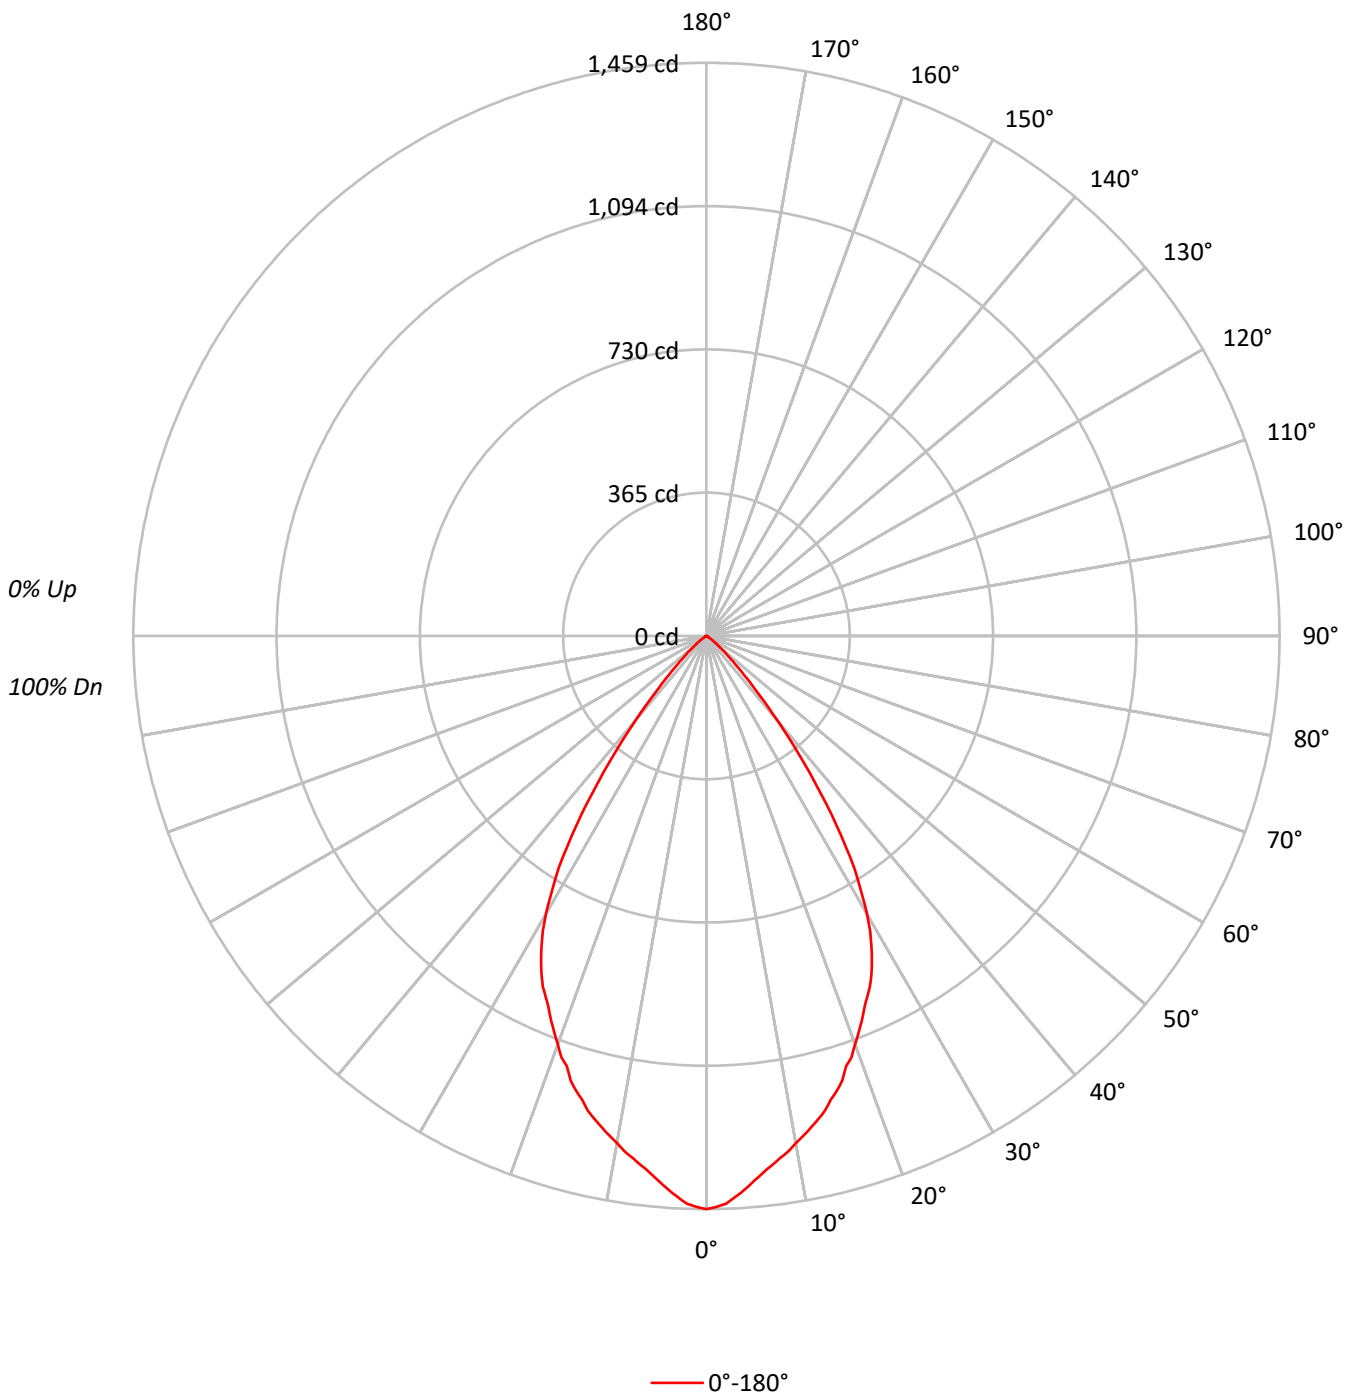



TEST NUMBER: P498222

CATALOG NUMBER: LDA2B158050R65D010 2LBDL1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92		95	92	90		92	90	88	87
3	102	96	90	86	100	94	89	86	91	88	84		89	86	83		87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82	78	76	74
5	92	83	77	73	90	82	76	72	80	75	72		79	74	71		77	73	70	69
6	87	78	72	67	85	77	71	67	75	70	66		74	69	66		73	69	65	64
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68	64	61	60
8	78	68	62	58	77	68	62	58	67	61	58		66	61	57		65	60	57	56
9	74	64	58	54	73	64	58	54	63	58	54		62	57	54		61	57	53	52
10	71	61	55	51	70	60	54	51	59	54	50		59	54	50		58	53	50	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	719766
5°	689779
10°	656875
15°	624309
20°	580730
25°	536145
30°	465205
35°	333786
40°	181297
45°	77447
50°	33311
55°	12042
60°	2171
65°	1751
70°	1010
75°	0
80°	0
85°	0



TEST NUMBER: P498222

CATALOG NUMBER: LDA2B158050R65D010 2LBDL1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	130.4	9.5
10°-20°	342.4	24.9
20°-30°	447.6	32.5
30°-40°	340.5	24.8
40°-50°	98.5	7.2
50°-60°	14.8	1.1
60°-70°	1.3	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	920.4	66.9
0°-40°	1261.0	91.7
0°-60°	1374.2	99.9
0°-90°	1375.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1375.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1459	
5°	1393	130
15°	1222	342
25°	985	448
35°	554	341
45°	111	98
55°	14	15
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P498222

CATALOG NUMBER: LDA2B158050R65D010 2LBDL1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1458.9
1°	1453.8
2°	1445.7
3°	1429.5
4°	1411.9
5°	1392.8
6°	1374.4
7°	1358.2
8°	1342.8
9°	1328.8
10°	1311.2
11°	1295.8
12°	1279.6
13°	1263.4
14°	1245.8
15°	1222.3
16°	1204.6
17°	1183.3
18°	1151.0
19°	1134.1
20°	1106.1
21°	1081.2
22.5°	1042.9
23°	1028.2
24°	1005.5
25°	984.9
26°	957.7
27°	927.5
28°	894.5
29°	859.2
30°	816.6
32.5°	699.7
35°	554.2
37.5°	408.6
40°	281.5
42.5°	178.6
45°	111.0
47.5°	69.1
50°	43.4
52.5°	25.7
55°	14.0
57.5°	5.1
60°	2.2
62.5°	1.5
65°	1.5



TEST NUMBER: P498222

CATALOG NUMBER: LDA2B158050R65D010 2LBDL1GPH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)