

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P498421

Luminaire Tested: **LDA2B159024R60D010 2LBDL1WH**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P498421  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-55)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B159024R60D010 2LBDL1WH  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2400K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 918.2 lumens  
Efficiency: N/A  
Efficacy: 65.1 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.86  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P498421  
CATALOG NUMBER: LDA2B159024R60D010 2LBDL1WH

### Luminous Intensity Polar Plot

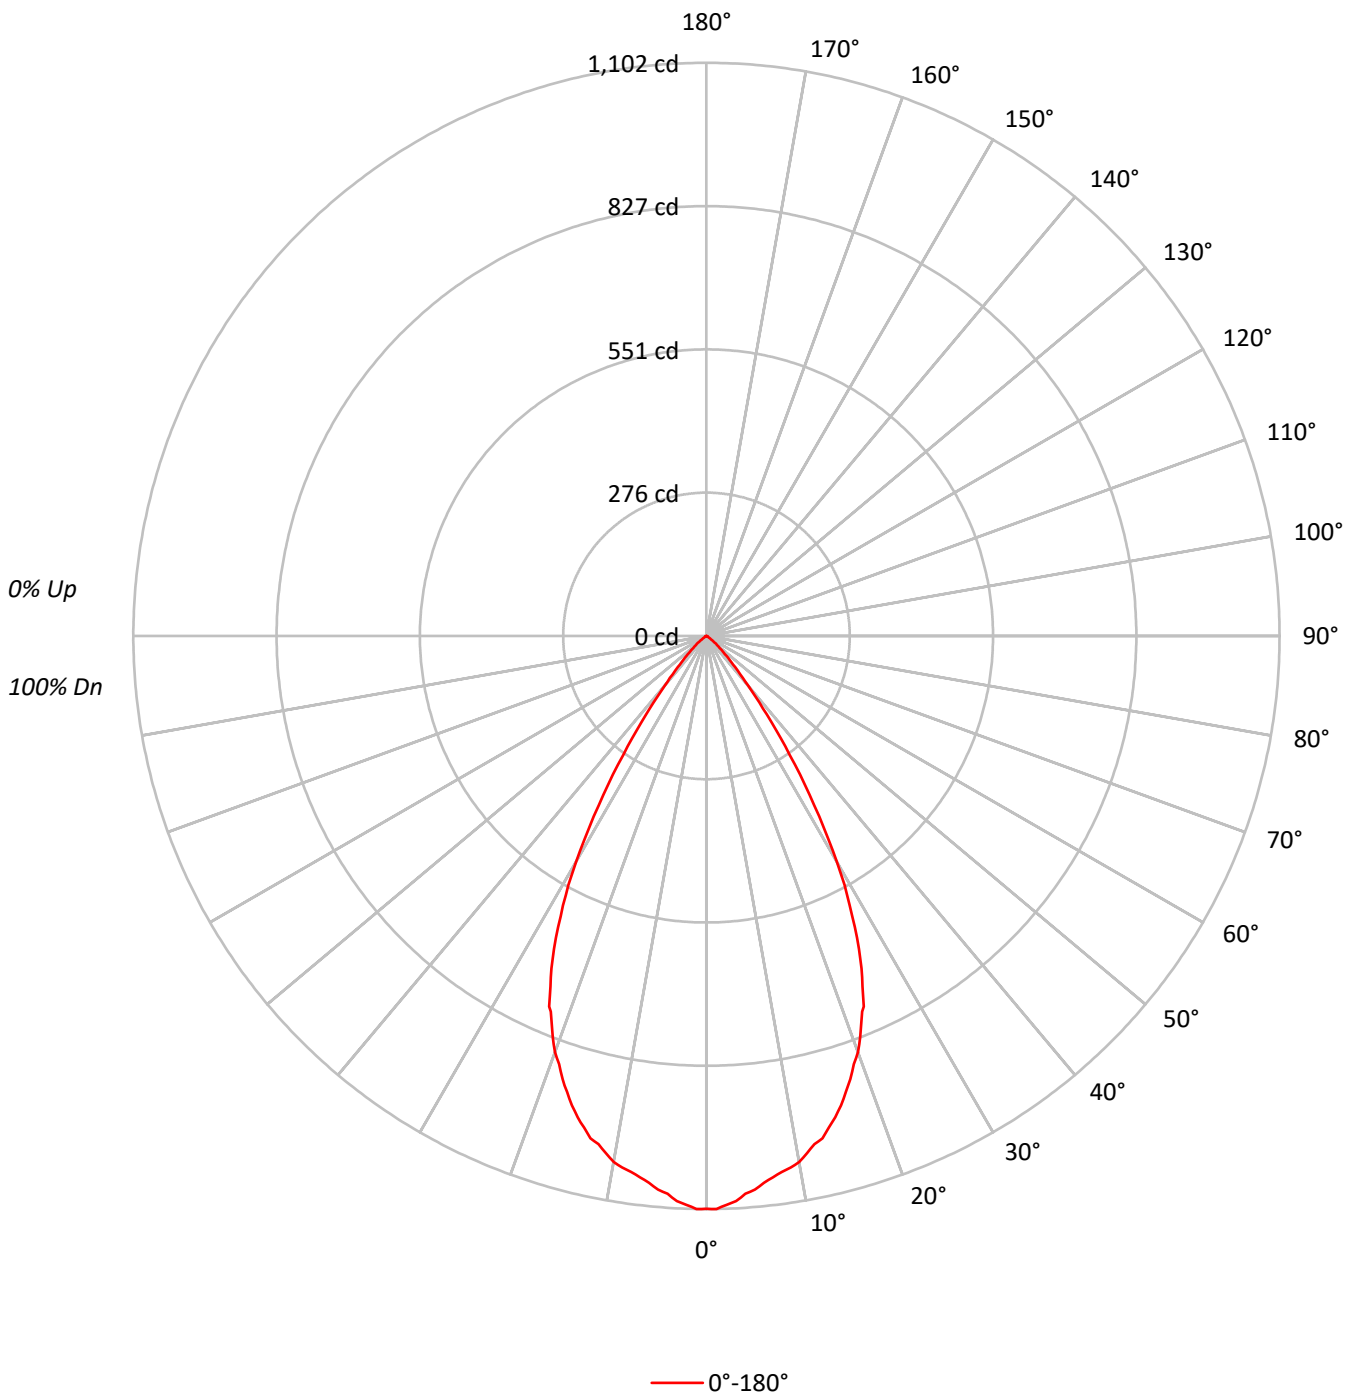



TEST NUMBER: P498421

CATALOG NUMBER: LDA2B159024R60D010 2LBDL1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	58	54	62	57	54	61	57	54	61	57	54	52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	543487
5°	529319
10°	514699
15°	489211
20°	447006
25°	383831
30°	285583
35°	167676
40°	79925
45°	37328
50°	18574
55°	6537
60°	1480
65°	1167
70°	721
75°	953
80°	0
85°	0



TEST NUMBER: P498421

CATALOG NUMBER: LDA2B159024R60D010 2LBDL1WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.6	11.0
10°-20°	266.5	29.0
20°-30°	316.4	34.5
30°-40°	178.6	19.4
40°-50°	46.4	5.1
50°-60°	8.4	0.9
60°-70°	0.9	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	683.5	74.4
0°-40°	862.1	93.9
0°-60°	917.0	99.9
0°-90°	918.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	918.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1102	
5°	1069	101
15°	958	267
25°	705	316
35°	278	179
45°	54	46
55°	8	8
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P498421

CATALOG NUMBER: LDA2B159024R60D010 2LBDL1WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1101.6
1°	1102.1
2°	1094.5
3°	1087.9
4°	1075.3
5°	1068.8
6°	1057.2
7°	1048.6
8°	1040.5
9°	1035.0
10°	1027.4
11°	1012.8
12°	999.2
13°	991.6
14°	973.9
15°	957.8
16°	939.1
17°	917.0
18°	895.8
19°	870.6
20°	851.4
21°	825.2
22.5°	781.8
23°	774.2
24°	737.4
25°	705.1
26°	669.3
27°	627.9
28°	587.1
29°	547.2
30°	501.3
32.5°	385.8
35°	278.4
37.5°	190.1
40°	124.1
42.5°	81.2
45°	53.5
47.5°	36.3
50°	24.2
52.5°	15.1
55°	7.6
57.5°	3.0
60°	1.5
62.5°	1.0
65°	1.0



TEST NUMBER: P498421

CATALOG NUMBER: LDA2B159024R60D010 2LBDL1WH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)