

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P498675

Luminaire Tested: **LDA2B159027R70D010 2LBD1WMH**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P498675  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-79)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/8/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B159027R70D010 2LBD1WMH  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2700K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1065.7 lumens  
Efficiency: N/A  
Efficacy: 75.6 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.09  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P498675

CATALOG NUMBER: LDA2B159027R70D010 2LBD1WMH

### Luminous Intensity Polar Plot

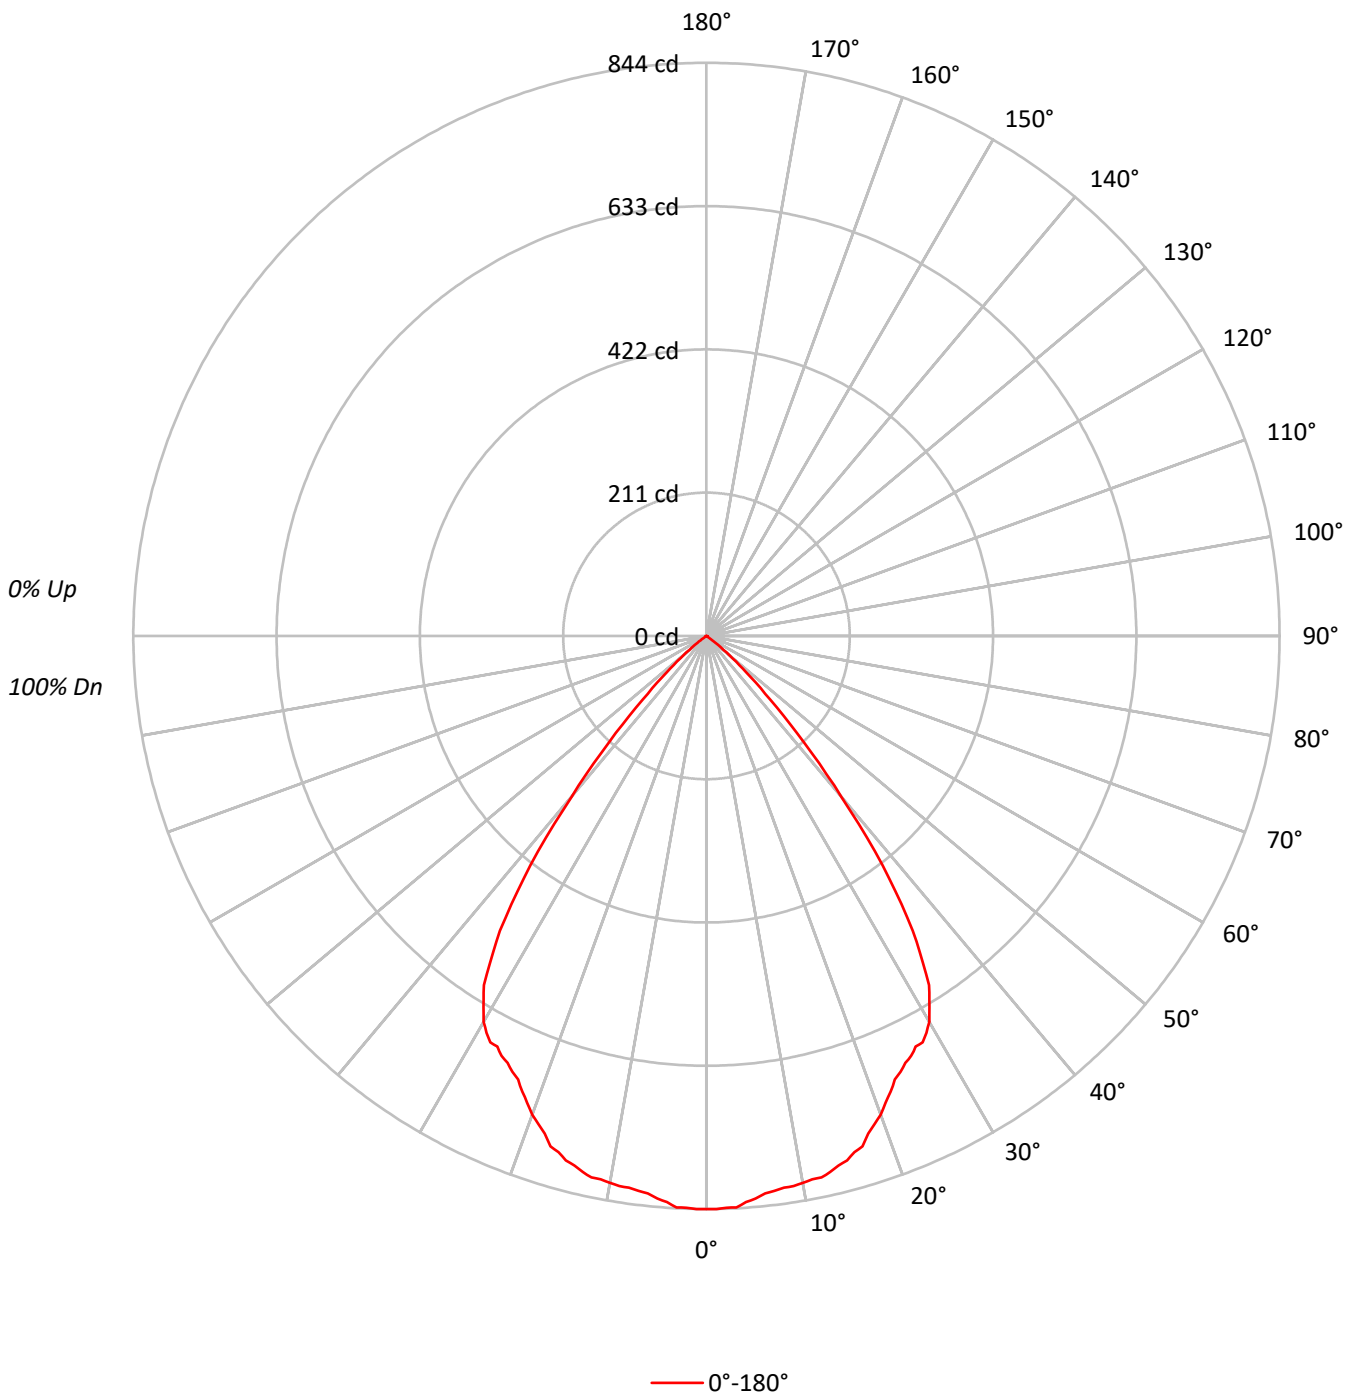



TEST NUMBER: P498675

CATALOG NUMBER: LDA2B159027R70D010 2LBD1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97	96	95	93
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91	89	87	85
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85	82	80	78
4	95	87	81	77	93	86	81	76	84	79	75		82	78	74		80	76	74	72
5	90	81	75	70	88	80	74	70	78	73	69		76	72	68		75	71	68	66
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70	66	62	61
7	80	70	63	59	79	69	63	59	68	62	58		67	62	58		66	61	58	56
8	76	65	59	54	74	65	59	54	64	58	54		62	57	54		61	57	54	52
9	71	61	55	50	70	61	54	50	60	54	50		59	54	50		58	53	50	48
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54	50	46	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	416397
5°	411797
10°	409746
15°	408306
20°	393768
25°	377517
30°	373713
35°	319150
40°	199137
45°	92169
50°	33388
55°	2322
60°	1085
65°	1284
70°	721
75°	953
80°	0
85°	0



TEST NUMBER: P498675

CATALOG NUMBER: LDA2B159027R70D010 2LBD1WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.9	7.4
10°-20°	223.9	21.0
20°-30°	322.0	30.2
30°-40°	317.4	29.8
40°-50°	113.1	10.6
50°-60°	9.3	0.9
60°-70°	0.9	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	624.7	58.6
0°-40°	942.1	88.4
0°-60°	1064.5	99.9
0°-90°	1065.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1065.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	844	
5°	832	79
15°	799	224
25°	694	322
35°	530	317
45°	132	113
55°	3	9
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P498675

CATALOG NUMBER: LDA2B159027R70D010 2LBD1WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	844.0
1°	844.0
2°	842.4
3°	842.9
4°	835.8
5°	831.5
6°	825.5
7°	823.3
8°	820.6
9°	820.1
10°	817.9
11°	815.2
12°	815.2
13°	810.3
14°	803.8
15°	799.4
16°	790.7
17°	785.8
18°	770.6
19°	760.3
20°	750.0
21°	736.4
22.5°	717.4
23°	709.8
24°	702.7
25°	693.5
26°	688.0
27°	678.8
28°	677.7
29°	667.9
30°	656.0
32.5°	609.8
35°	529.9
37.5°	426.1
40°	309.2
42.5°	211.4
45°	132.1
47.5°	78.8
50°	43.5
52.5°	16.3
55°	2.7
57.5°	1.6
60°	1.1
62.5°	1.1
65°	1.1



TEST NUMBER: P498675

CATALOG NUMBER: LDA2B159027R70D010 2LBD1WMH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)