

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280663

Luminaire Tested: **LDA2B159030D010 EU2B15WFL559030 2LBAD1WH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P280663  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B159030D010 EU2B15WFL559030 2LBAD1WH  
Description: PORTFOLIO 2IN ADJ 1500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND  
2in ADJ spun Refl, Self-Flanged, WH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1245.7 lumens  
Efficiency: N/A  
Efficacy: 88.4 lumens/watt  
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P280663

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBAD1WH

### Luminous Intensity Polar Plot

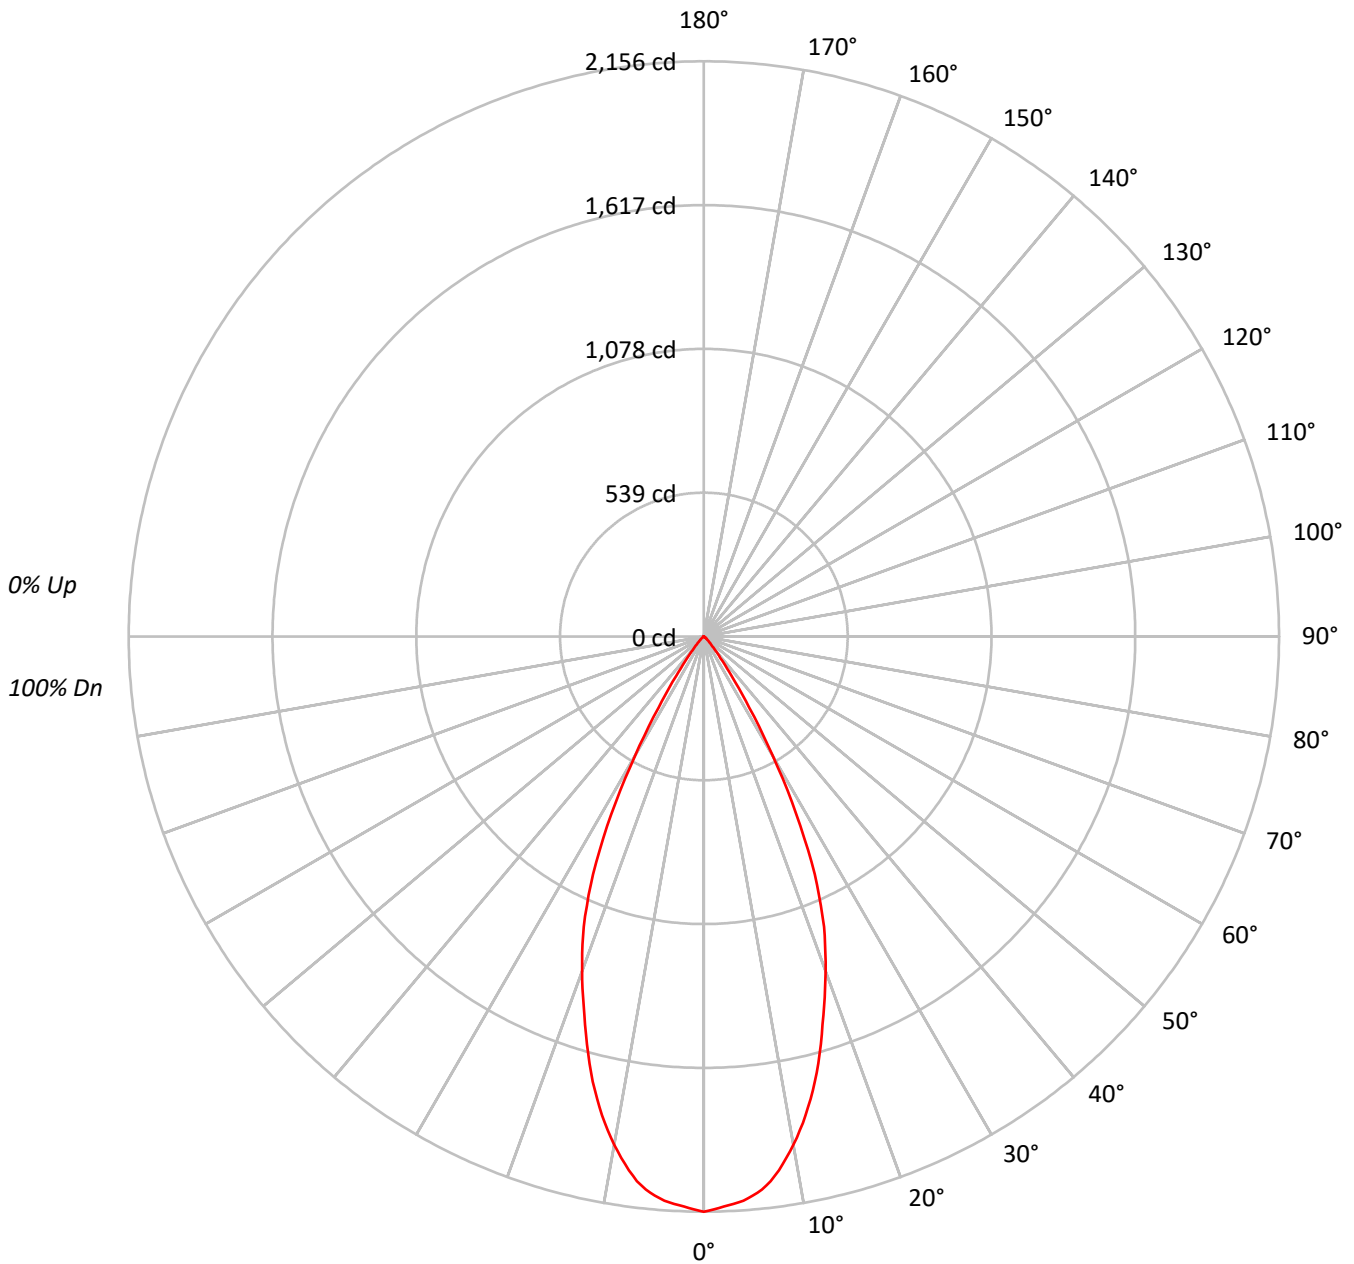



TEST NUMBER: P280663

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBAD1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1063885
5°	1042196
10°	969182
15°	846186
20°	700593
25°	535818
30°	293217
35°	108531
40°	37547
45°	16955
50°	7982
55°	3957
60°	1184
65°	700
70°	865
75°	0
80°	0
85°	0



TEST NUMBER: P280663

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBAD1WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	195.5	15.7
10°-20°	457.9	36.8
20°-30°	432.8	34.7
30°-40°	133.2	10.7
40°-50°	21.1	1.7
50°-60°	4.5	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1086.3	87.2
0°-40°	1219.5	97.9
0°-60°	1245.0	99.9
0°-90°	1245.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1245.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2156	
5°	2104	196
15°	1657	458
25°	984	433
35°	180	133
45°	24	21
55°	5	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280663

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBAD1WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2156.4
1°	2148.3
2°	2138.5
3°	2130.4
4°	2120.0
5°	2104.4
6°	2084.2
7°	2057.1
8°	2020.7
9°	1978.5
10°	1934.6
11°	1886.1
12°	1834.7
13°	1778.6
14°	1720.3
15°	1656.7
17.5°	1488.6
20°	1334.4
22.5°	1177.9
25°	984.3
27.5°	751.0
30°	514.7
32.5°	316.0
35°	180.2
37.5°	100.5
40°	58.3
42.5°	36.4
45°	24.3
47.5°	16.2
50°	10.4
52.5°	6.9
55°	4.6
57.5°	2.9
60°	1.2
62.5°	0.6
65°	0.6
67.5°	0.6
70°	0.6
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280663

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBAD1WH

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)