

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P499335

Luminaire Tested: **LDA2B159040R70D010 2LBDLC1MMS**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P499335
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B159040R70D010 2LBDLC1MMS
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 4000K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1178.7 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 14.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P499335

CATALOG NUMBER: LDA2B159040R70D010 2LBDLC1MMS

Luminous Intensity Polar Plot

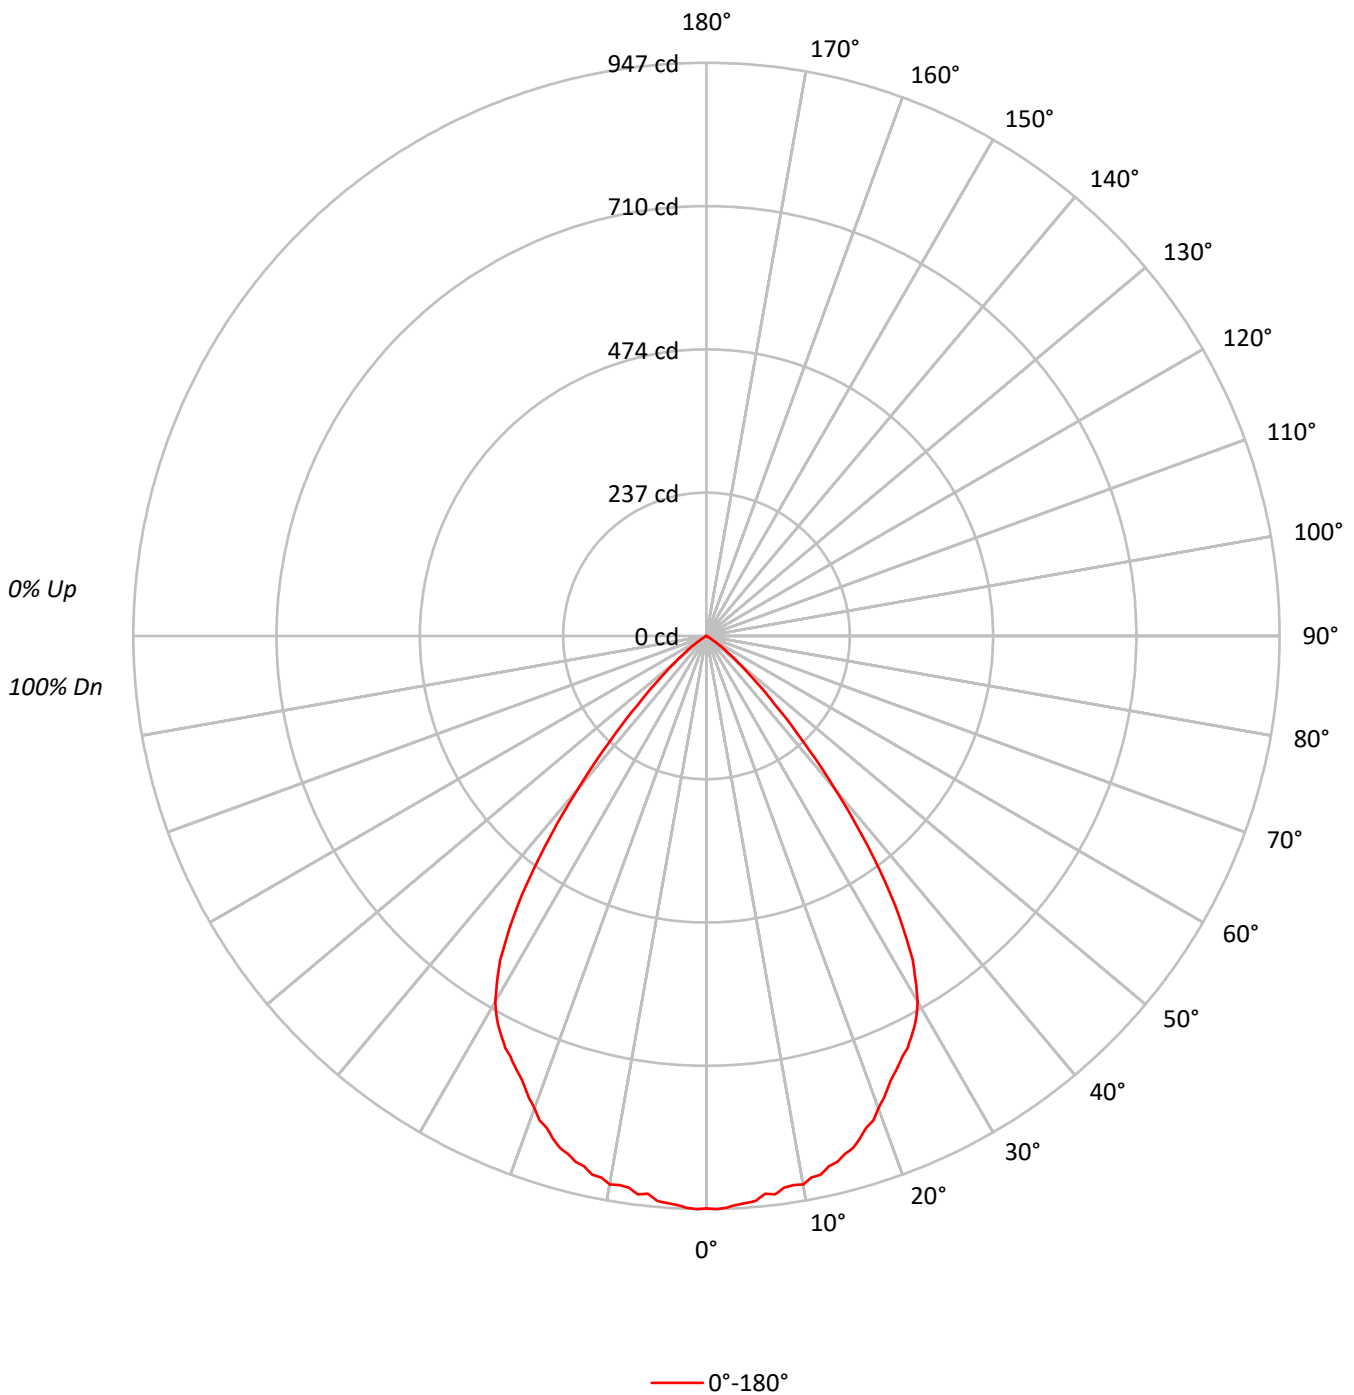



TEST NUMBER: P499335

CATALOG NUMBER: LDA2B159040R70D010 2LBDLC1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82		87	84	81		85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63		71	66	63		70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58		66	61	58		65	61	57	56
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57	53	49	48
10	68	57	51	47	66	57	50	46	56	50	46		55	50	46		54	49	46	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	466720
5°	463996
10°	460895
15°	452334
20°	435980
25°	417419
30°	397640
35°	328064
40°	213241
45°	111426
50°	51809
55°	19009
60°	1875
65°	1518
70°	865
75°	1144
80°	0
85°	0



TEST NUMBER: P499335

CATALOG NUMBER: LDA2B159040R70D010 2LBDLC1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.6	7.5
10°-20°	248.9	21.1
20°-30°	353.2	30.0
30°-40°	330.3	28.0
40°-50°	132.8	11.3
50°-60°	23.2	2.0
60°-70°	1.1	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	690.7	58.6
0°-40°	1021.0	86.6
0°-60°	1177.1	99.9
0°-90°	1178.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1178.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	946	
5°	937	89
15°	886	249
25°	767	353
35°	545	330
45°	160	133
55°	22	23
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P499335

CATALOG NUMBER: LDA2B159040R70D010 2LBDLC1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	946.0
1°	947.3
2°	945.3
3°	941.4
4°	939.5
5°	936.9
6°	926.5
7°	929.7
8°	920.6
9°	918.7
10°	920.0
11°	911.6
12°	909.6
13°	899.2
14°	895.3
15°	885.6
16°	879.7
17°	868.1
18°	854.4
19°	846.6
20°	830.4
21°	818.1
22.5°	795.3
23°	789.5
24°	778.5
25°	766.8
26°	757.7
27°	744.7
28°	731.7
29°	716.1
30°	698.0
32.5°	634.3
35°	544.7
37.5°	438.9
40°	331.1
42.5°	236.3
45°	159.7
47.5°	105.2
50°	67.5
52.5°	42.2
55°	22.1
57.5°	7.1
60°	1.9
62.5°	1.3
65°	1.3



TEST NUMBER: P499335

CATALOG NUMBER: LDA2B159040R70D010 2LBDLC1MMS

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)