

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P499938

Luminaire Tested: **LDA2B159730R60D010 2LBDLC1MW**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P499938  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-55)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B159730R60D010 2LBDLC1MW  
Description: 1500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 97 CRI LEDS AND 3000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1027.1 lumens  
Efficiency: N/A  
Efficacy: 72.8 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.86  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P499938

CATALOG NUMBER: LDA2B159730R60D010 2LBDLC1MW

### Luminous Intensity Polar Plot

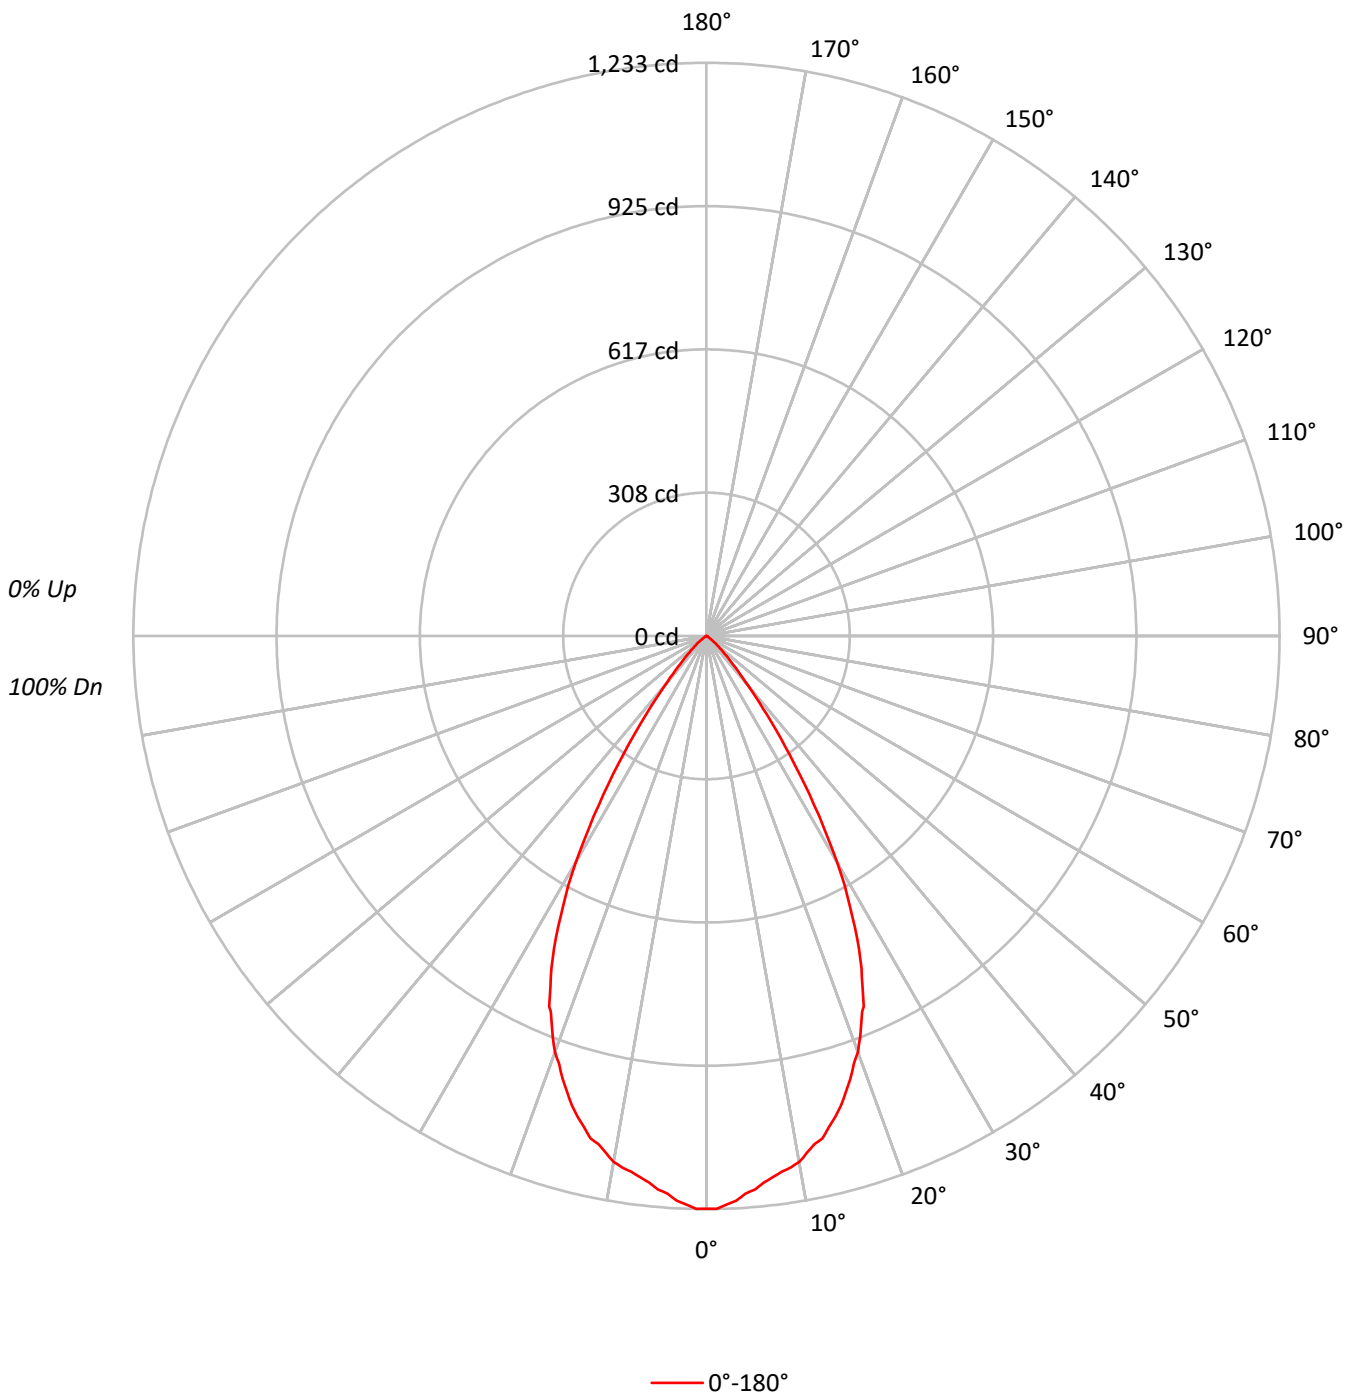



TEST NUMBER: P499938

CATALOG NUMBER: LDA2B159730R60D010 2LBDLC1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	85	83	82
4	98	90	85	81	96	89	84	81	87	83	80		85	82	79		83	80	78	76
5	93	85	79	75	91	84	79	75	82	78	74		81	77	73		79	76	73	71
6	88	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	68	67
7	84	75	69	65	83	74	69	65	73	68	65		72	68	64		71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61		68	64	60		67	63	60	59
9	76	67	61	57	75	67	61	57	66	61	57		65	60	57		64	60	57	55
10	73	63	58	54	72	63	58	54	62	57	54		61	57	54		61	57	53	52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	607920
5°	592067
10°	575718
15°	547234
20°	499981
25°	429340
30°	319479
35°	187551
40°	89392
45°	41724
50°	20800
55°	7311
60°	1677
65°	1284
70°	865
75°	1144
80°	0
85°	0



TEST NUMBER: P499938

CATALOG NUMBER: LDA2B159730R60D010 2LBDLC1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	112.5	11.0
10°-20°	298.1	29.0
20°-30°	354.0	34.5
30°-40°	199.8	19.5
40°-50°	51.9	5.1
50°-60°	9.5	0.9
60°-70°	1.0	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	764.6	74.4
0°-40°	964.4	93.9
0°-60°	1025.8	99.9
0°-90°	1027.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1027.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1232	
5°	1196	112
15°	1071	298
25°	789	354
35°	311	200
45°	60	52
55°	8	9
65°	1	1
75°	1	0
85°	0	0
90°	0	



TEST NUMBER: P499938

CATALOG NUMBER: LDA2B159730R60D010 2LBDLC1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1232.2
1°	1232.7
2°	1224.3
3°	1216.9
4°	1202.8
5°	1195.5
6°	1182.5
7°	1172.9
8°	1163.9
9°	1157.7
10°	1149.2
11°	1132.9
12°	1117.7
13°	1109.2
14°	1089.4
15°	1071.4
16°	1050.5
17°	1025.7
18°	1002.0
19°	973.8
20°	952.3
21°	923.0
22.5°	874.5
23°	866.0
24°	824.8
25°	788.7
26°	748.7
27°	702.4
28°	656.7
29°	612.1
30°	560.8
32.5°	431.6
35°	311.4
37.5°	212.7
40°	138.8
42.5°	90.8
45°	59.8
47.5°	40.6
50°	27.1
52.5°	16.9
55°	8.5
57.5°	3.4
60°	1.7
62.5°	1.1
65°	1.1



TEST NUMBER: P499938

CATALOG NUMBER: LDA2B159730R60D010 2LBDLC1MW

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)