

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P500334

Luminaire Tested: **LDA2B208030R45D010 2LBD1WMH**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P500334
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-40)
Test Lab: INNOVATION CENTER
Issue Date: 3/8/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B208030R45D010 2LBD1WMH
Description: 2000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3000K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2021.3 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 0.71 / 0.71 / 0.65
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 20.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P500334

CATALOG NUMBER: LDA2B208030R45D010 2LBD1WMH

Luminous Intensity Polar Plot

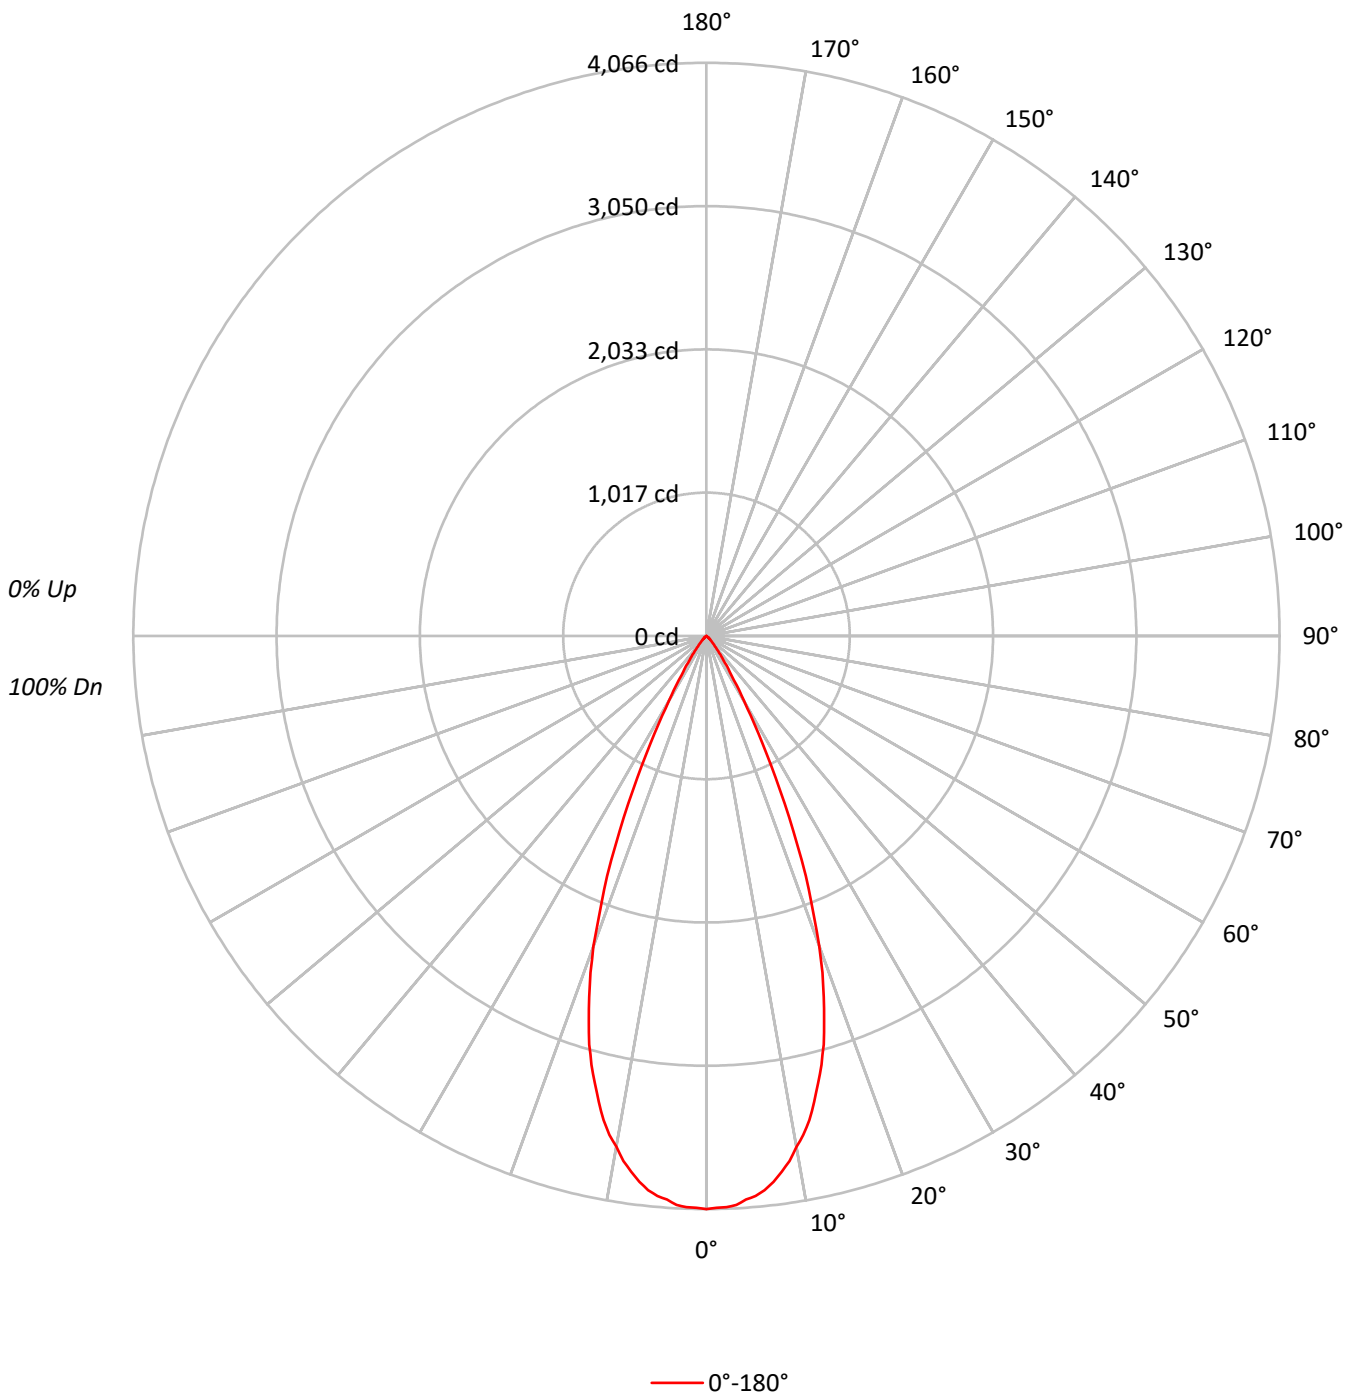



TEST NUMBER: P500334

CATALOG NUMBER: LDA2B208030R45D010 2LBD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	102	99	108	104	101	98	101	98	96	98	96	94	95	94	92	91
3	105	100	96	93	104	99	95	92	96	93	90	94	91	89	92	90	88	86
4	101	95	90	87	100	94	90	86	92	88	85	90	87	84	88	86	84	82
5	97	90	86	82	96	90	85	82	88	84	81	86	83	80	85	82	80	78
6	94	86	81	78	92	86	81	77	84	80	77	83	79	76	82	78	76	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	78	75	73	71
8	87	79	74	70	86	78	74	70	77	73	70	76	73	70	76	72	70	68
9	84	76	71	67	83	75	70	67	74	70	67	73	70	67	73	69	67	66
10	81	73	68	65	80	72	68	64	71	67	64	71	67	64	70	67	64	63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2006108
5°	1975538
10°	1843579
15°	1608861
20°	1230185
25°	714424
30°	303072
35°	125456
40°	55452
45°	28676
50°	14276
55°	3355
60°	1973
65°	1167
70°	1442
75°	0
80°	0
85°	0



TEST NUMBER: P500334

CATALOG NUMBER: LDA2B208030R45D010 2LBD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	371.2	18.4
10°-20°	859.1	42.5
20°-30°	600.7	29.7
30°-40°	148.7	7.4
40°-50°	34.5	1.7
50°-60°	5.7	0.3
60°-70°	1.1	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1831.0	90.6
0°-40°	1979.7	97.9
0°-60°	2019.8	99.9
0°-90°	2021.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2021.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4066	
5°	3989	371
15°	3150	859
25°	1312	601
35°	208	149
45°	41	34
55°	4	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P500334

CATALOG NUMBER: LDA2B208030R45D010 2LBD1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	4066.2
1°	4057.4
2°	4055.5
3°	4042.8
4°	4006.6
5°	3989.0
6°	3952.8
7°	3901.0
8°	3837.4
9°	3771.9
10°	3680.0
11°	3604.7
12°	3512.7
13°	3393.4
14°	3272.2
15°	3149.9
16°	3015.0
17°	2854.6
18°	2692.2
19°	2525.0
20°	2343.1
21°	2125.0
22.5°	1842.4
23°	1726.0
24°	1516.8
25°	1312.4
26°	1120.7
27°	941.7
28°	784.3
29°	647.4
30°	532.0
32.5°	327.6
35°	208.3
37.5°	135.0
40°	86.1
42.5°	58.7
45°	41.1
47.5°	29.3
50°	18.6
52.5°	9.8
55°	3.9
57.5°	2.0
60°	2.0
62.5°	1.0
65°	1.0



TEST NUMBER: P500334

CATALOG NUMBER: LDA2B208030R45D010 2LBD1WMH

CANDELA DISTRIBUTION (continued):

	0°
67.5°	1.0
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)