

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P315131

Luminaire Tested: **LDA2B20NFL8030D010 PIN1MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P315131  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-2)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B20NFL8030D010 PIN1MMS  
Description: PORTFOLIO 2IN ADJ 2000 LUMEN LED LUMINAIRE WITH NARROW FLOOD OPTIC  
AND 2in Adj PinHole, Black oculus, matte metallic silver finish  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1817.0 lumens  
Efficiency: N/A  
Efficacy: 88.2 lumens/watt  
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.39  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P315131

CATALOG NUMBER: LDA2B20NFL8030D010 PIN1MMS

### Luminous Intensity Polar Plot

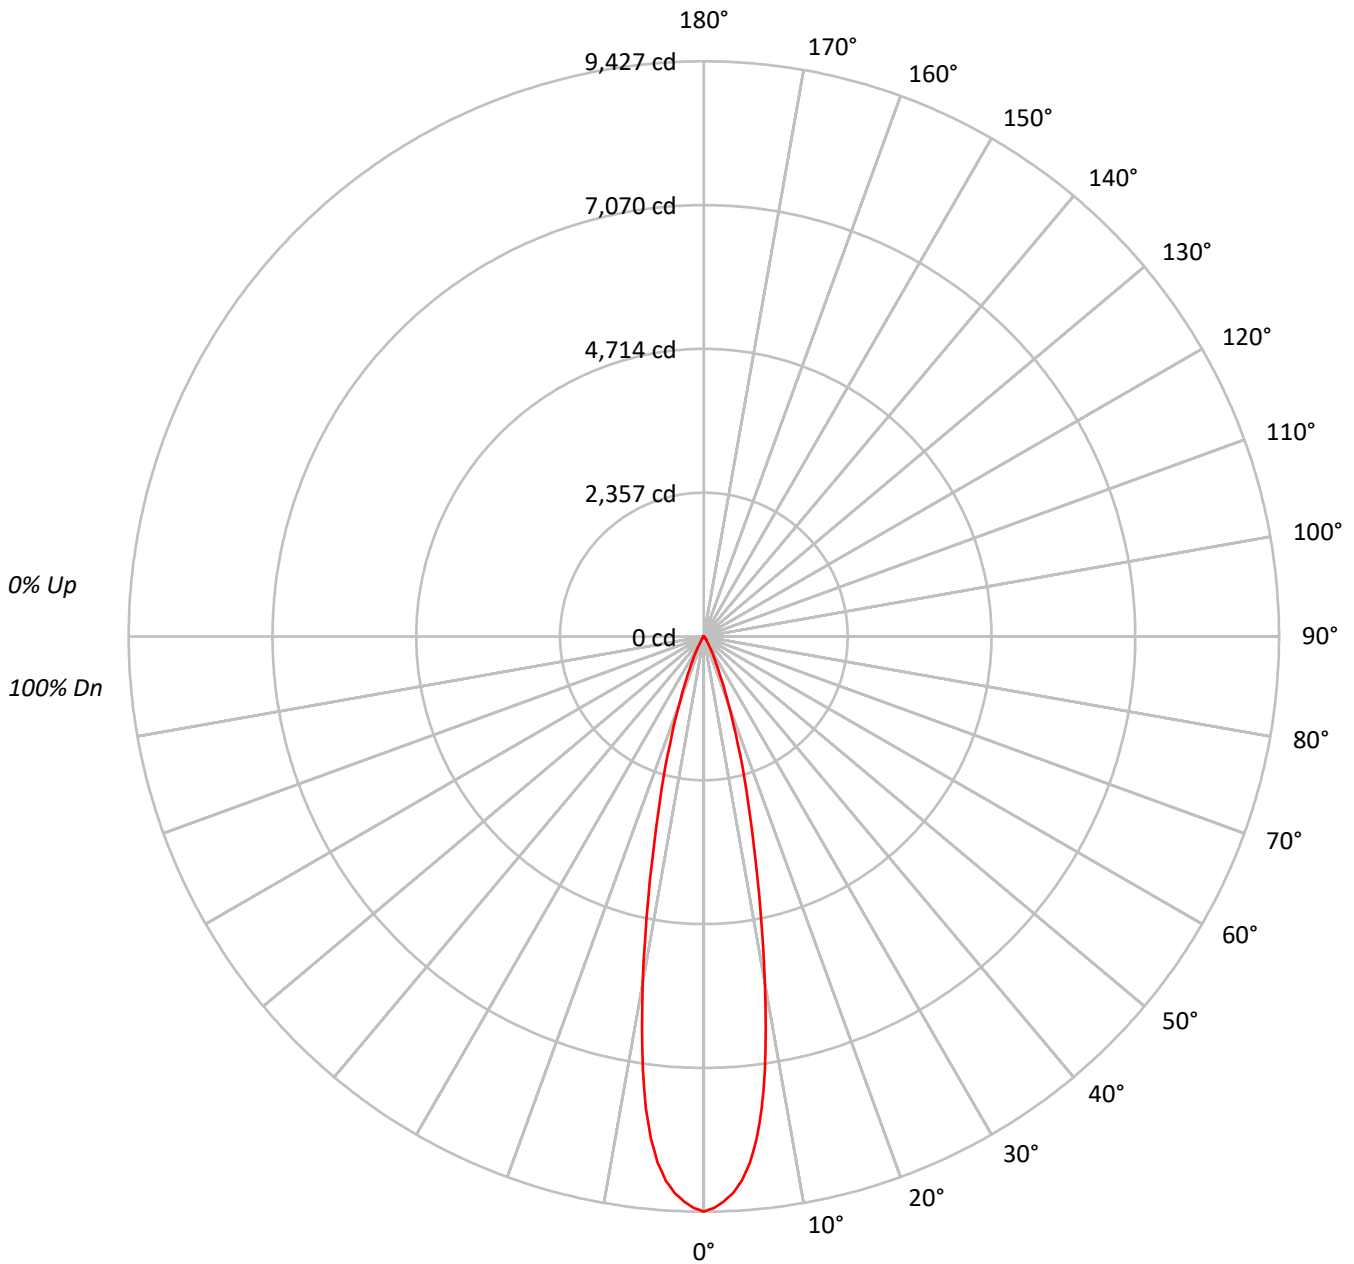



TEST NUMBER: P315131

CATALOG NUMBER: LDA2B20NFL8030D010 PIN1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	110	113	111	109	108	107	106	105	103	102	102	100	99	99	97				97															
2	112	108	105	103	110	107	104	102	103	101	100	101	99	98	98	97	96	94				94															
3	108	104	100	98	107	103	99	97	100	98	95	98	96	94	96	94	93	91				91															
4	105	100	96	94	104	99	96	93	97	94	92	95	93	91	94	92	90	89				89															
5	102	97	93	90	101	96	92	90	94	91	89	93	90	88	92	89	87	86				86															
6	100	94	90	87	98	93	89	87	92	89	86	91	88	86	89	87	85	84				84															
7	97	91	87	84	96	90	87	84	89	86	84	88	85	83	87	85	83	82				82															
8	95	88	85	82	94	88	84	82	87	84	81	86	83	81	85	83	81	80				80															
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78				78															
10	90	84	80	78	90	84	80	78	83	80	77	82	79	77	82	79	77	76				76															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4650774
5°	4289180
10°	2890362
15°	1425087
20°	608714
25°	239303
30°	94226
35°	41317
40°	19836
45°	9559
50°	5296
55°	2925
60°	1677
65°	1051
70°	1298
75°	0
80°	0
85°	0



TEST NUMBER: P315131

CATALOG NUMBER: LDA2B20NFL8030D010 PIN1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	733.6	40.4
10°-20°	790.1	43.5
20°-30°	228.1	12.6
30°-40°	48.2	2.6
40°-50°	11.8	0.7
50°-60°	3.4	0.2
60°-70°	1.2	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1751.8	96.4
0°-40°	1800.0	99.1
0°-60°	1815.3	99.9
0°-90°	1817.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1817.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9427	
5°	8661	734
15°	2790	790
25°	440	228
35°	69	48
45°	14	12
55°	3	3
65°	1	1
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P315131

CATALOG NUMBER: LDA2B20NFL8030D010 PIN1MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9426.7
1°	9367.6
2°	9267.3
3°	9132.0
4°	8940.0
5°	8660.7
6°	8283.6
7°	7791.8
8°	7186.8
9°	6481.6
10°	5769.5
11°	5049.7
12°	4370.2
13°	3766.9
14°	3236.5
15°	2790.1
17.5°	1844.0
20°	1159.4
22.5°	712.9
25°	439.6
27.5°	268.2
30°	165.4
32.5°	104.5
35°	68.6
37.5°	45.4
40°	30.8
42.5°	21.4
45°	13.7
47.5°	8.6
50°	6.9
52.5°	5.1
55°	3.4
57.5°	2.6
60°	1.7
62.5°	1.7
65°	0.9
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.9
80°	0.0
82.5°	0.0



TEST NUMBER: P315131

CATALOG NUMBER: LDA2B2ONFL8030D010 PIN1MMS

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)