

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P278215

Luminaire Tested: **LDA2B208035D010 EU2B20SP158035 2LBAD1WH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P278215  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B208035D010 EU2B20SP158035 2LBAD1WH  
Description: PORTFOLIO 2IN ADJ 2000 LUMEN LED LUMINAIRE WITH SPOT OPTIC AND 2in  
ADJ spun Refl, Self-Flanged, WH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2025.0 lumens  
Efficiency: N/A  
Efficacy: 98.3 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P278215

CATALOG NUMBER: LDA2B208035D010 EU2B20SP158035 2LBAD1WH

### Luminous Intensity Polar Plot

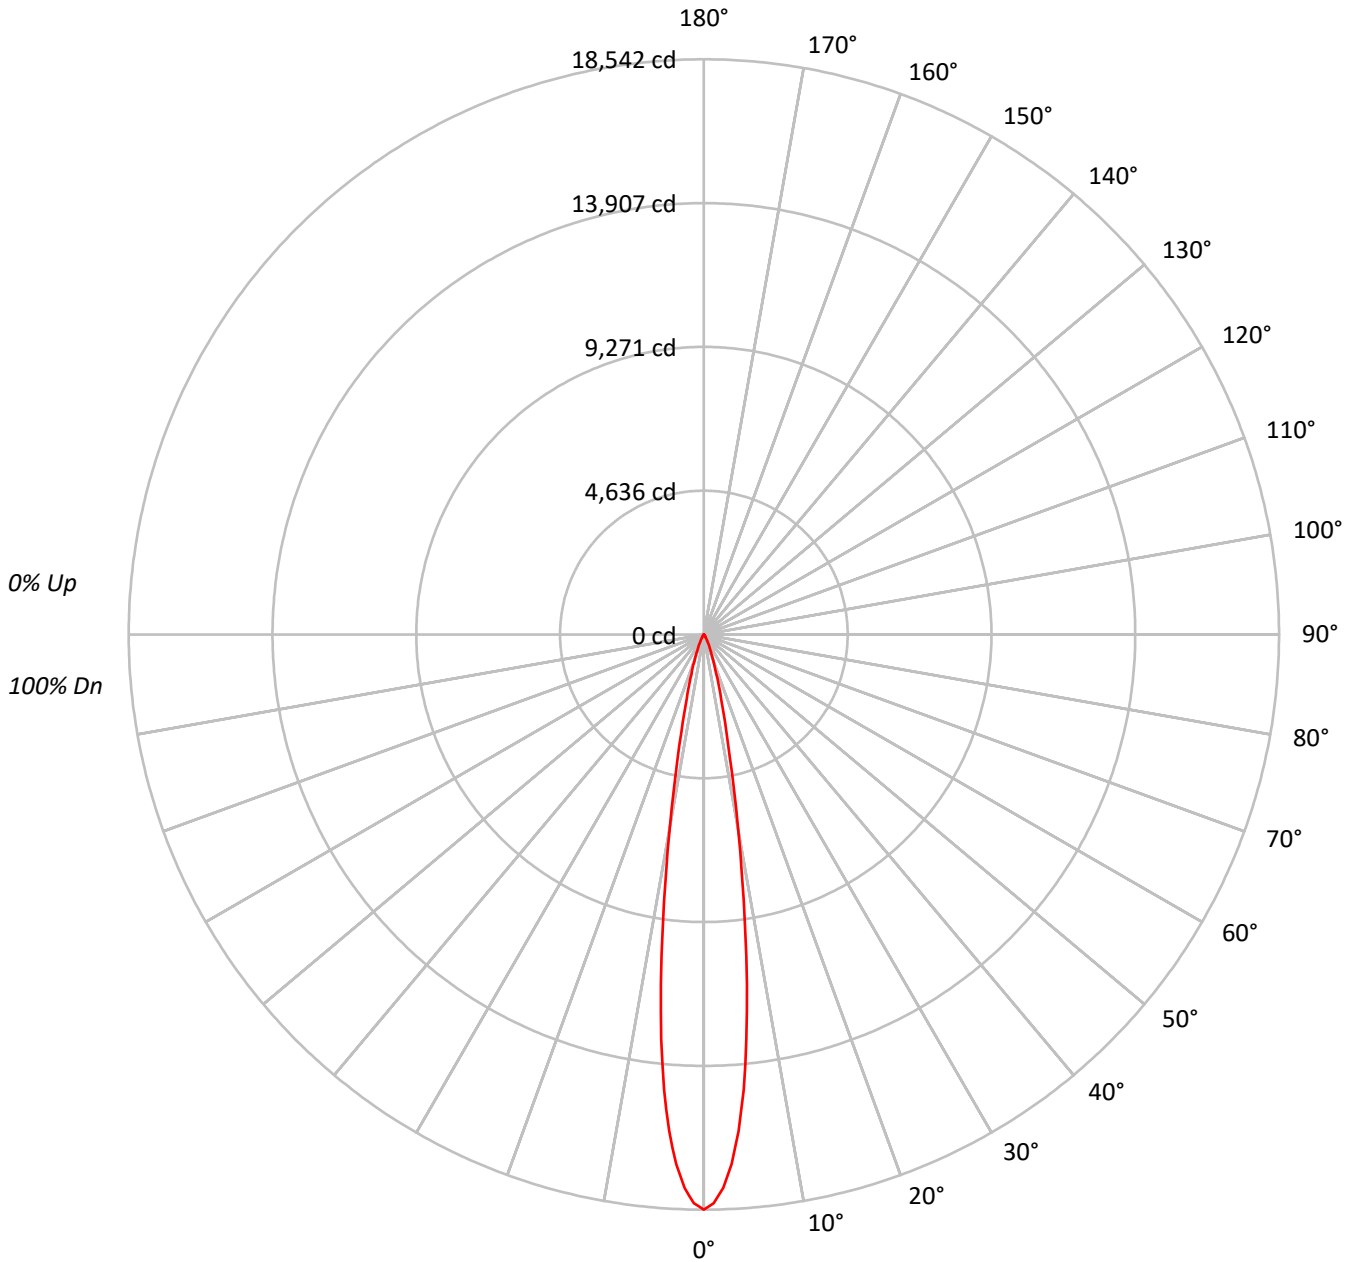



TEST NUMBER: P278215

CATALOG NUMBER: LDA2B208035D010 EU2B20SP158035 2LBAD1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																				
2	112	109	107	104	110	108	105	103	105	103	101	102	100	99	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																						
3	109	105	102	100	108	104	101	99	102	99	98	100	98	96	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																								
4	107	102	99	96	105	101	98	96	99	97	95	98	95	94	96	94	93	92	91	90	89	88	87	86	85	84	83	82																										
5	104	99	96	93	103	99	95	93	97	94	92	96	93	91	94	92	91	90	89	88	87	86	85	84	83	82																												
6	102	97	93	91	101	96	93	91	95	92	90	94	91	89	93	91	89	88	87	86	85	84	83	82																														
7	100	95	91	89	99	94	91	88	93	90	88	92	90	88	91	89	87	86	85	84	83	82																																
8	98	93	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85	84	83	82																																	
9	96	91	87	85	95	90	87	85	90	87	85	89	86	84	88	86	84	83	82																																			
10	94	89	86	83	94	89	85	83	88	85	83	87	85	83	87	85	83	82																																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	9148161
5°	7293493
10°	3166448
15°	1094009
20°	448529
25°	202612
30°	81522
35°	37944
40°	20609
45°	7675
50°	4605
55°	3441
60°	1973
65°	1167
70°	1442
75°	0
80°	0
85°	0



TEST NUMBER: P278215

CATALOG NUMBER: LDA2B208035D010 EU2B20SP158035 2LBAD1WH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1113.0	55.0
10°-20°	668.4	33.0
20°-30°	184.0	9.1
30°-40°	43.8	2.2
40°-50°	10.8	0.5
50°-60°	3.6	0.2
60°-70°	1.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1965.4	97.1
0°-40°	2009.2	99.2
0°-60°	2023.5	99.9
0°-90°	2025.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2025.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	18542	
5°	14727	###
15°	2142	668
25°	372	184
35°	63	44
45°	11	11
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P278215

CATALOG NUMBER: LDA2B208035D010 EU2B20SP158035 2LBAD1WH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	18542.5
1°	18337.4
2°	17846.2
3°	17096.9
4°	16039.5
5°	14727.0
6°	13124.3
7°	11368.6
8°	9523.9
9°	7827.2
10°	6320.6
11°	5045.0
12°	4015.6
13°	3238.3
14°	2620.1
15°	2141.9
17.5°	1329.5
20°	854.3
22.5°	560.2
25°	372.2
27.5°	239.1
30°	143.1
32.5°	90.0
35°	63.0
37.5°	46.0
40°	32.0
42.5°	19.0
45°	11.0
47.5°	8.0
50°	6.0
52.5°	5.0
55°	4.0
57.5°	3.0
60°	2.0
62.5°	2.0
65°	1.0
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P278215

CATALOG NUMBER: LDA2B208035D010 EU2B20SP158035 2LBAD1WH

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)