

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P500586

Luminaire Tested: **LDA2B208035R60D010 2LBDLC1MW**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P500586  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-55)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B208035R60D010 2LBDLC1MW  
Description: 2000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3500K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1951.5 lumens  
Efficiency: N/A  
Efficacy: 94.7 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.86  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P500586

CATALOG NUMBER: LDA2B208035R60D010 2LBDLC1MW

### Luminous Intensity Polar Plot

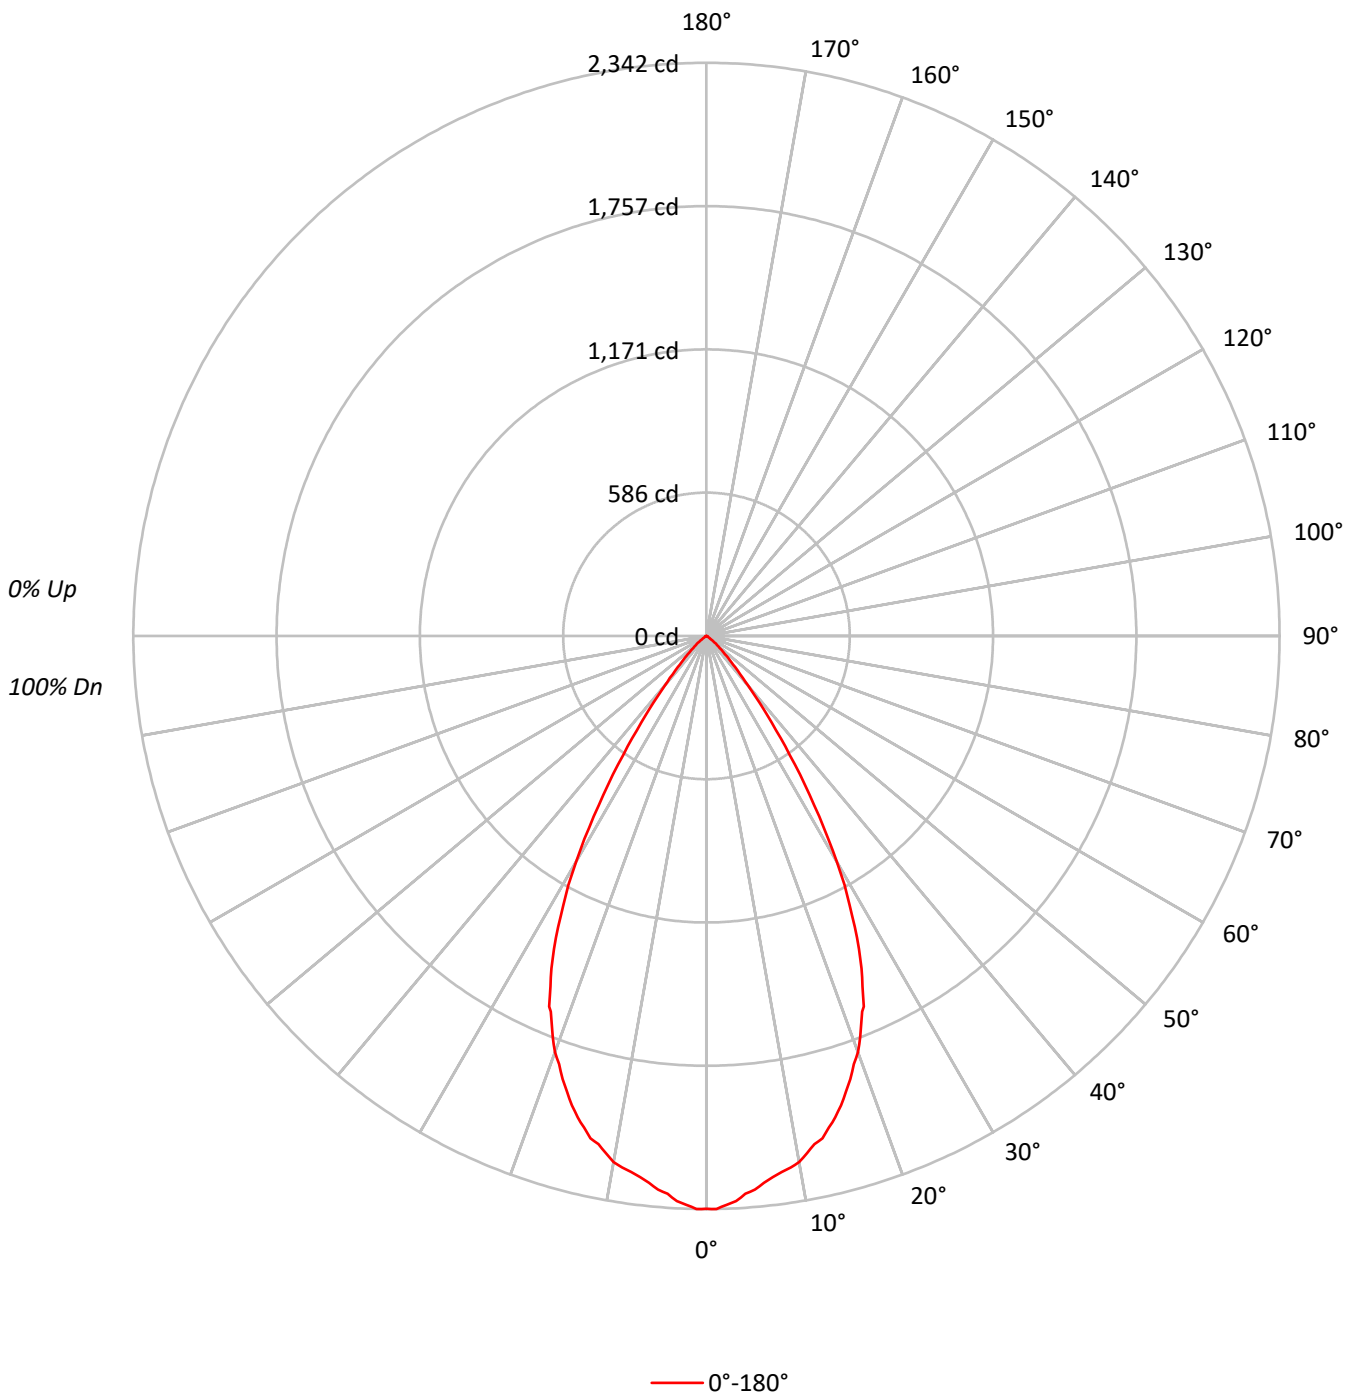



TEST NUMBER: P500586

CATALOG NUMBER: LDA2B208035R60D010 2LBDLC1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101		101	100	98		98	97	96	94
2	108	103	100	96	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88	85	83	82
4	98	90	85	81	96	89	84	81	87	83	80		85	82	79		83	80	78	76
5	93	85	79	75	91	84	79	75	82	78	74		81	77	73		79	76	73	71
6	88	80	74	70	87	79	74	70	78	73	69		76	72	69		75	71	68	67
7	84	75	69	65	83	74	69	65	73	68	65		72	68	64		71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61		68	64	60		67	63	60	59
9	76	67	61	57	75	67	61	57	66	61	57		65	60	57		64	60	57	55
10	73	63	58	54	72	63	58	54	62	57	54		61	57	54		61	57	53	52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1155009
5°	1124903
10°	1093874
15°	1039715
20°	949980
25°	815730
30°	606999
35°	356371
40°	169833
45°	79261
50°	39528
55°	13848
60°	3158
65°	2452
70°	1587
75°	2097
80°	0
85°	0



TEST NUMBER: P500586

CATALOG NUMBER: LDA2B208035R60D010 2LBDLC1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	213.7	11.0
10°-20°	566.4	29.0
20°-30°	672.5	34.5
30°-40°	379.6	19.5
40°-50°	98.7	5.1
50°-60°	18.0	0.9
60°-70°	1.8	0.1
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1452.7	74.4
0°-40°	1832.2	93.9
0°-60°	1948.9	99.9
0°-90°	1951.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1951.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2341	
5°	2271	214
15°	2036	566
25°	1498	673
35°	592	380
45°	114	99
55°	16	18
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P500586

CATALOG NUMBER: LDA2B208035R60D010 2LBDLC1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2341.1
1°	2342.1
2°	2326.0
3°	2312.1
4°	2285.3
5°	2271.4
6°	2246.7
7°	2228.5
8°	2211.4
9°	2199.6
10°	2183.5
11°	2152.4
12°	2123.5
13°	2107.4
14°	2069.9
15°	2035.6
16°	1995.9
17°	1948.7
18°	1903.7
19°	1850.1
20°	1809.4
21°	1753.6
22.5°	1661.5
23°	1645.4
24°	1567.1
25°	1498.5
26°	1422.4
27°	1334.5
28°	1247.7
29°	1163.0
30°	1065.5
32.5°	820.0
35°	591.7
37.5°	404.1
40°	263.7
42.5°	172.6
45°	113.6
47.5°	77.2
50°	51.5
52.5°	32.2
55°	16.1
57.5°	6.4
60°	3.2
62.5°	2.1
65°	2.1



TEST NUMBER: P500586

CATALOG NUMBER: LDA2B208035R60D010 2LBDLC1MW

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)