

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P500630

Luminaire Tested: **LDA2B208035R70D010 2LBDLC1MB**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P500630
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B208035R70D010 2LBDLC1MB
Description: 2000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3500K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1938.9 lumens
Efficiency: N/A
Efficacy: 94.1 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 20.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P500630

CATALOG NUMBER: LDA2B208035R70D010 2LBDLC1MB

Luminous Intensity Polar Plot

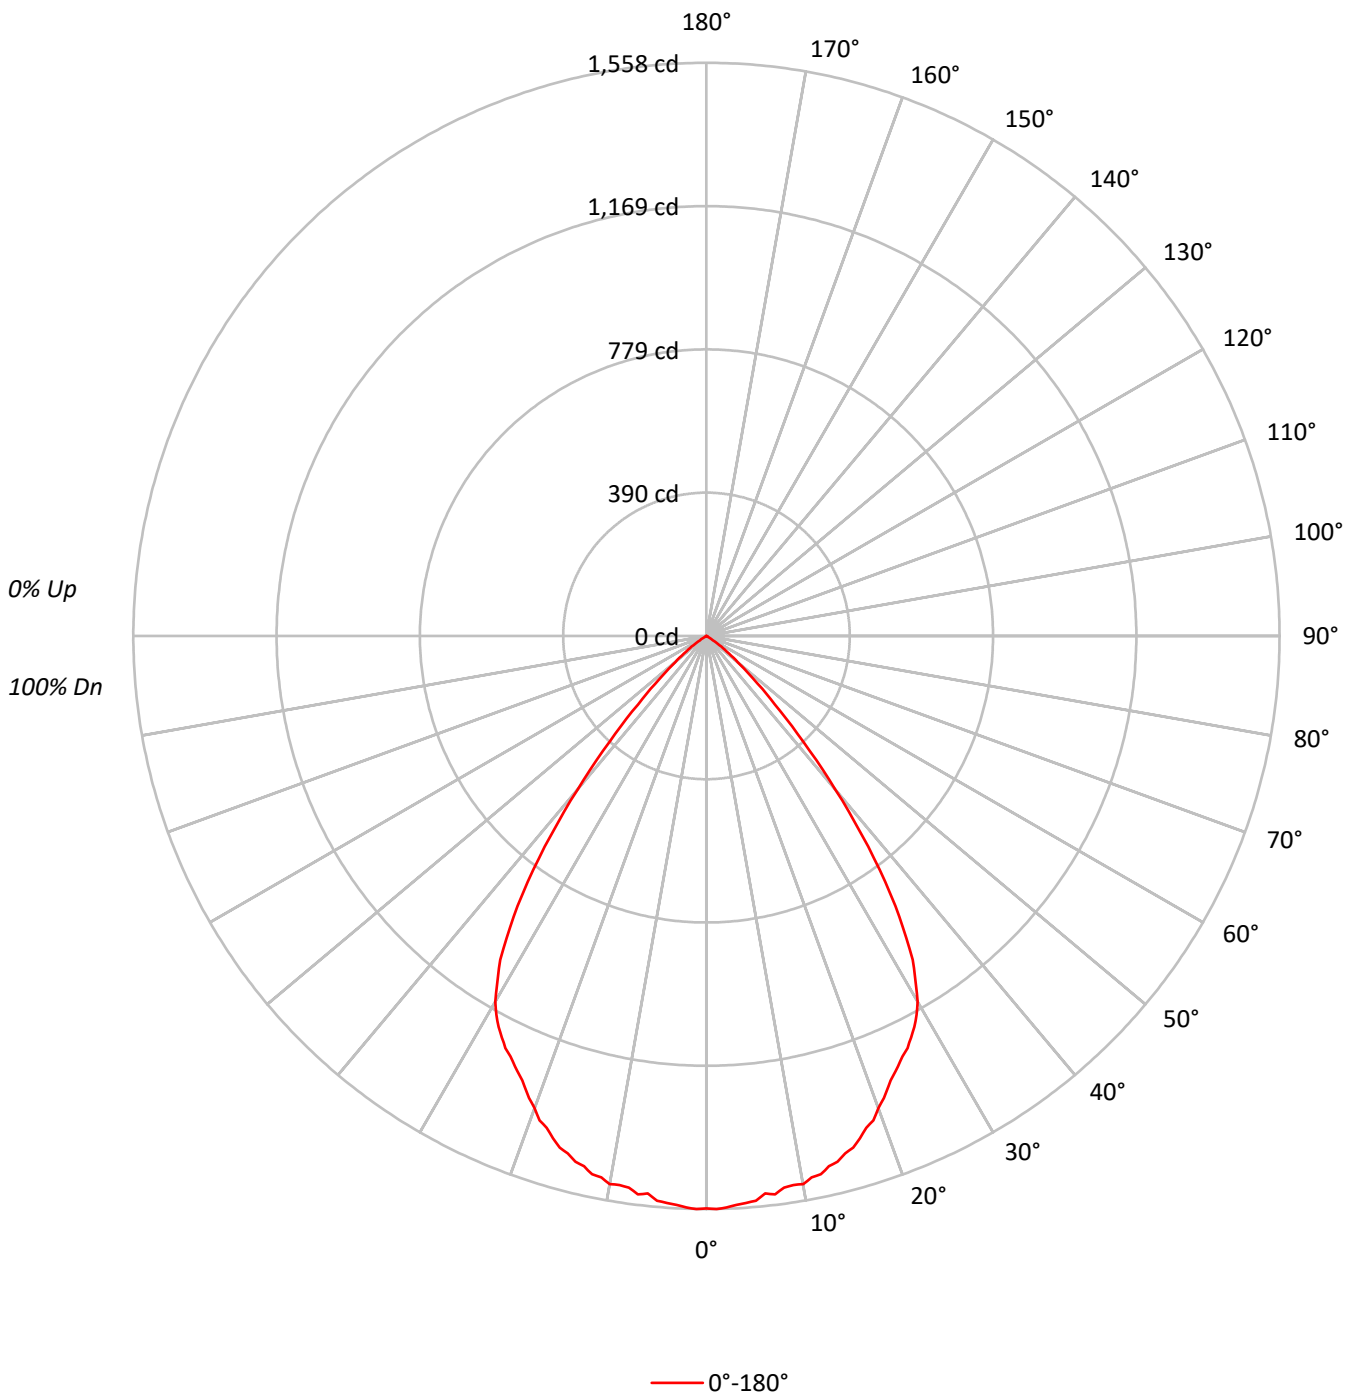



TEST NUMBER: P500630

CATALOG NUMBER: LDA2B208035R70D010 2LBDLC1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97	96	94	93
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91	89	87	85
3	101	94	89	84	99	93	88	84	90	86	82		87	84	81		85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		74	71	67	66
6	85	75	68	64	83	74	68	63	72	67	63		71	66	63		70	65	62	61
7	80	70	63	59	78	69	63	58	68	62	58		66	61	58		65	61	57	56
8	75	65	58	54	74	64	58	54	63	58	54		62	57	53		61	57	53	52
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57	53	49	48
10	68	57	51	46	66	57	50	46	56	50	46		55	50	46		54	49	46	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	767671
5°	763175
10°	758072
15°	743981
20°	717131
25°	686553
30°	653999
35°	539646
40°	350743
45°	183291
50°	85273
55°	31223
60°	3158
65°	2452
70°	1587
75°	2097
80°	0
85°	0



TEST NUMBER: P500630

CATALOG NUMBER: LDA2B208035R70D010 2LBDLC1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	145.7	7.5
10°-20°	409.4	21.1
20°-30°	581.0	30.0
30°-40°	543.3	28.0
40°-50°	218.5	11.3
50°-60°	38.2	2.0
60°-70°	1.8	0.1
70°-80°	1.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1136.1	58.6
0°-40°	1679.4	86.6
0°-60°	1936.1	99.9
0°-90°	1938.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1938.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1556	
5°	1541	146
15°	1457	409
25°	1261	581
35°	896	543
45°	263	219
55°	36	38
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P500630

CATALOG NUMBER: LDA2B208035R70D010 2LBDLC1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1556.0
1°	1558.1
2°	1554.9
3°	1548.5
4°	1545.3
5°	1541.0
6°	1523.9
7°	1529.3
8°	1514.3
9°	1511.1
10°	1513.2
11°	1499.4
12°	1496.2
13°	1479.1
14°	1472.7
15°	1456.6
16°	1447.0
17°	1427.8
18°	1405.4
19°	1392.6
20°	1365.9
21°	1345.6
22.5°	1308.2
23°	1298.6
24°	1280.4
25°	1261.2
26°	1246.3
27°	1224.9
28°	1203.5
29°	1177.9
30°	1148.0
32.5°	1043.4
35°	896.0
37.5°	721.9
40°	544.6
42.5°	388.7
45°	262.7
47.5°	173.0
50°	111.1
52.5°	69.4
55°	36.3
57.5°	11.7
60°	3.2
62.5°	2.1
65°	2.1



TEST NUMBER: P500630

CATALOG NUMBER: LDA2B208035R70D010 2LBDLC1MB

CANDELA DISTRIBUTION (continued):

	0°
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	1.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)