

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280824

Luminaire Tested: **LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P280824
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH
Description: PORTFOLIO 2IN ADJ 2000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in ADJ spun Refl, Self-Flanged, WHH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2261.3 lumens
Efficiency: N/A
Efficacy: 109.8 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P280824

CATALOG NUMBER: LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH

Luminous Intensity Polar Plot

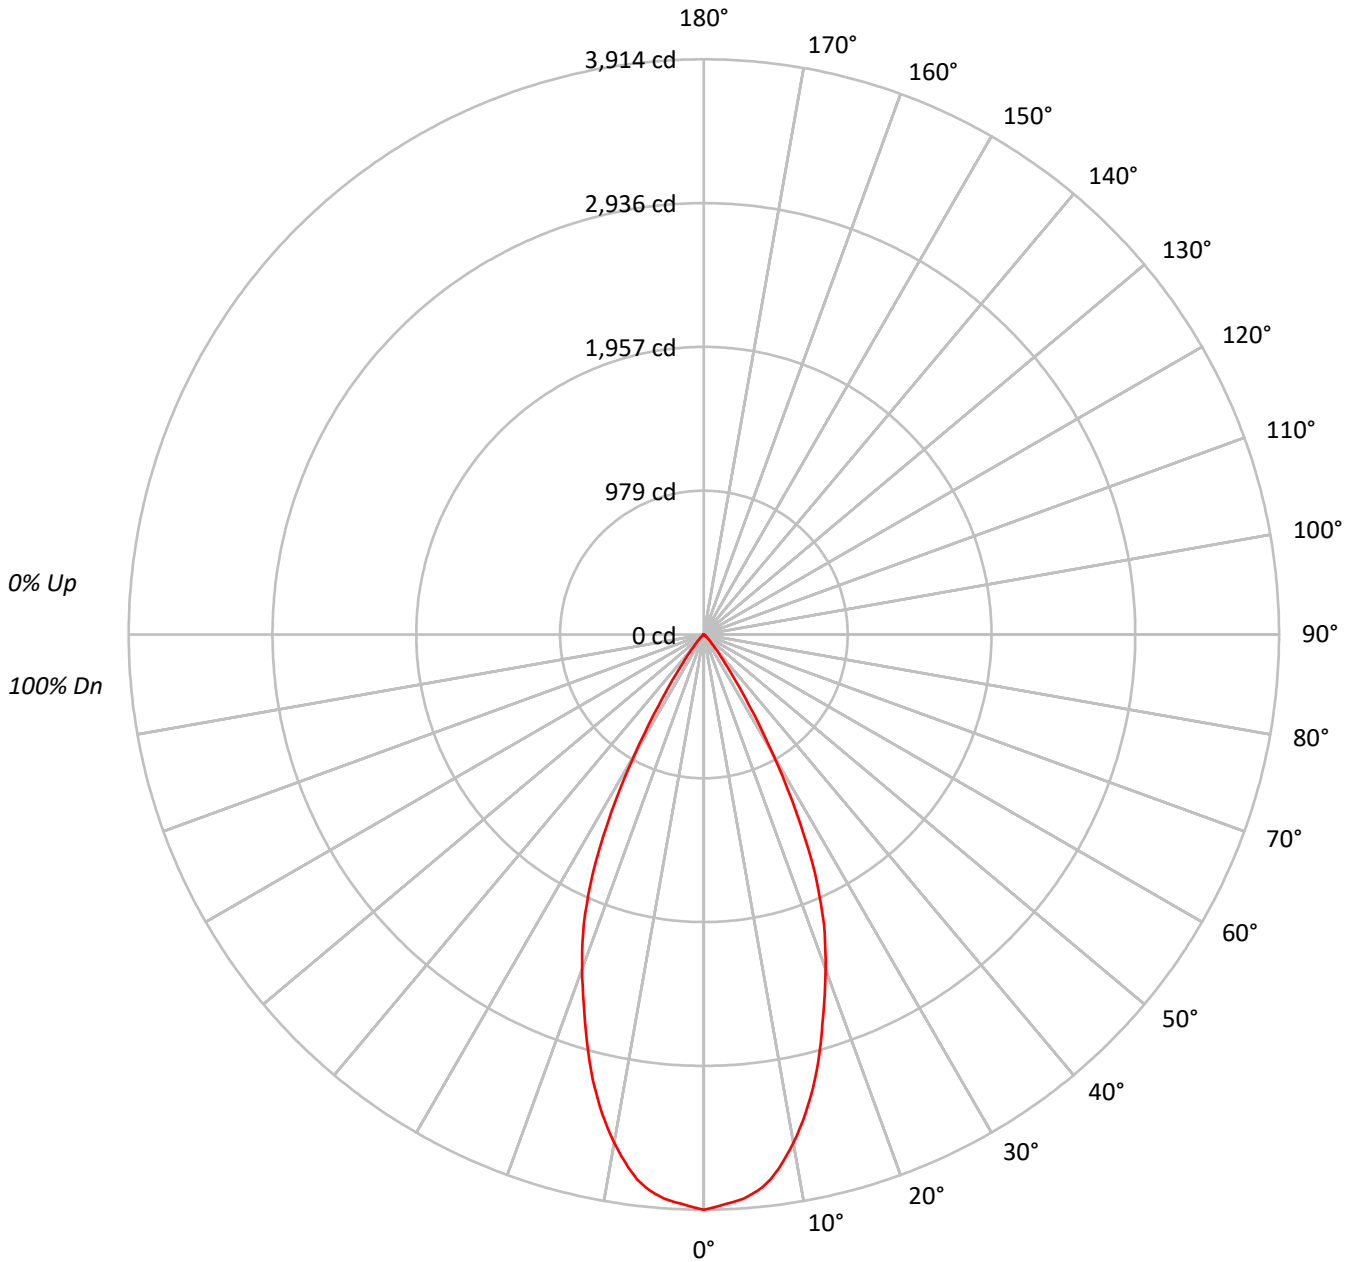



TEST NUMBER: P280824

CATALOG NUMBER: LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76		
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72		
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65		
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62		
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1931215
5°	1891841
10°	1759316
15°	1536077
20°	1271767
25°	972670
30°	532257
35°	197067
40°	68204
45°	30700
50°	14506
55°	7225
60°	2072
65°	1167
70°	1442
75°	0
80°	0
85°	0



TEST NUMBER: P280824

CATALOG NUMBER: LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	355.0	15.7
10°-20°	831.2	36.8
20°-30°	785.7	34.7
30°-40°	241.9	10.7
40°-50°	38.2	1.7
50°-60°	8.1	0.4
60°-70°	1.1	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1971.8	87.2
0°-40°	2213.7	97.9
0°-60°	2260.0	99.9
0°-90°	2261.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2261.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3914	
5°	3820	355
15°	3007	831
25°	1787	786
35°	327	242
45°	44	38
55°	8	8
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280824

CATALOG NUMBER: LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3914.4
1°	3899.7
2°	3881.9
3°	3867.2
4°	3848.4
5°	3820.0
6°	3783.3
7°	3734.1
8°	3668.0
9°	3591.4
10°	3511.8
11°	3423.7
12°	3330.3
13°	3228.6
14°	3122.7
15°	3007.4
17.5°	2702.2
20°	2422.3
22.5°	2138.1
25°	1786.8
27.5°	1363.2
30°	934.3
32.5°	573.6
35°	327.2
37.5°	182.5
40°	105.9
42.5°	66.1
45°	44.0
47.5°	29.4
50°	18.9
52.5°	12.6
55°	8.4
57.5°	5.2
60°	2.1
62.5°	1.0
65°	1.0
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280824

CATALOG NUMBER: LDA2B208040D010 EU2B20WFL558040 2LBAD1WHH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)