

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P278259

Luminaire Tested: **LDA2B209035D010 EU2B20SP159035 2LBAD1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P278259
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B209035D010 EU2B20SP159035 2LBAD1LI
Description: PORTFOLIO 2IN ADJ 2000 LUMEN LED LUMINAIRE WITH SPOT OPTIC AND 2in
ADJ spun Refl, Self-Flanged, LI
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1677.1 lumens
Efficiency: N/A
Efficacy: 81.4 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P278259

CATALOG NUMBER: LDA2B209035D010 EU2B20SP159035 2LBAD1LI

Luminous Intensity Polar Plot

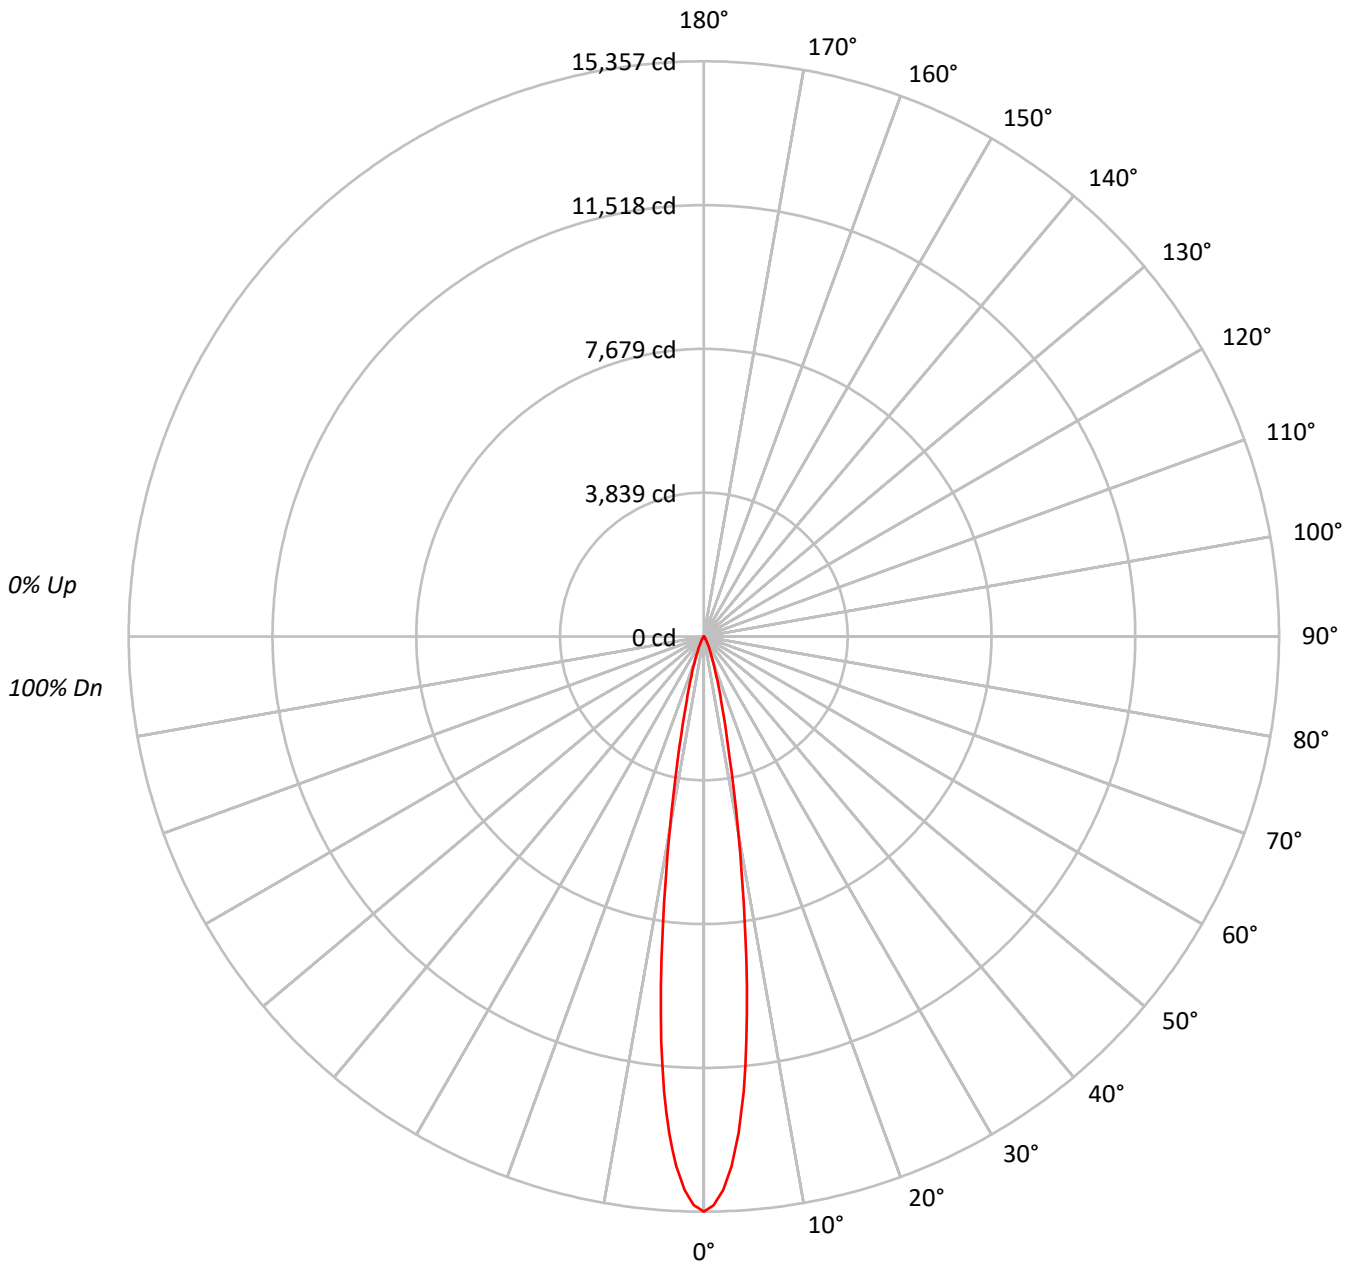



TEST NUMBER: P278259

CATALOG NUMBER: LDA2B209035D010 EU2B20SP159035 2LBAD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83																					
2	112	109	107	104	110	108	105	103	105	103	101	102	100	99	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																						
3	109	105	102	100	108	104	101	99	102	99	98	100	98	96	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82	81	80																						
4	107	102	99	96	105	101	98	96	99	97	95	98	95	94	96	94	93	92	91	90	89	88	87	86	85	84	83	82	81	80	79	78																						
5	104	99	96	93	103	99	95	93	97	94	92	96	93	91	94	92	91	90	89	88	87	86	85	84	83	82	81	80	79	78	77	76																						
6	102	97	93	91	101	96	93	91	95	92	90	94	91	89	93	91	89	88	87	86	85	84	83	82	81	80	79	78	77	76	75	74																						
7	100	95	91	89	99	94	91	88	93	90	88	92	90	88	91	89	87	86	85	84	83	82	81	80	79	78	77	76	75	74	73	72	71																					
8	98	93	89	87	97	92	89	87	91	88	86	90	88	86	89	87	86	85	84	83	82	81	80	79	78	77	76	75	74	73	72	71	70																					
9	96	91	87	85	95	90	87	85	90	87	85	89	86	84	88	86	84	83	82	81	80	79	78	77	76	75	74	73	72	71	70	69	68																					
10	94	89	86	83	94	89	85	83	88	85	83	87	85	83	86	85	83	82	81	80	79	78	77	76	75	74	73	72	71	70	69	68	67																					

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	7576557
5°	6040470
10°	2622442
15°	906047
20°	371507
25°	167773
30°	67508
35°	31439
40°	17067
45°	6349
50°	3838
55°	2838
60°	1677
65°	934
70°	1154
75°	0
80°	0
85°	0



TEST NUMBER: P278259

CATALOG NUMBER: LDA2B209035D010 EU2B20SP159035 2LBAD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	921.8	55.0
10°-20°	553.6	33.0
20°-30°	152.4	9.1
30°-40°	36.2	2.2
40°-50°	8.9	0.5
50°-60°	2.9	0.2
60°-70°	1.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1627.8	97.1
0°-40°	1664.0	99.2
0°-60°	1675.9	99.9
0°-90°	1677.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1677.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15357	
5°	12197	922
15°	1774	554
25°	308	152
35°	52	36
45°	9	9
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P278259

CATALOG NUMBER: LDA2B209035D010 EU2B20SP159035 2LBAD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	15357.0
1°	15187.1
2°	14780.3
3°	14159.7
4°	13284.0
5°	12196.9
6°	10869.6
7°	9415.5
8°	7887.7
9°	6482.5
10°	5234.7
11°	4178.3
12°	3325.8
13°	2682.0
14°	2169.9
15°	1773.9
17.5°	1101.1
20°	707.6
22.5°	464.0
25°	308.2
27.5°	198.0
30°	118.5
32.5°	74.6
35°	52.2
37.5°	38.1
40°	26.5
42.5°	15.7
45°	9.1
47.5°	6.6
50°	5.0
52.5°	4.1
55°	3.3
57.5°	2.5
60°	1.7
62.5°	1.7
65°	0.8
67.5°	0.8
70°	0.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P278259

CATALOG NUMBER: LDA2B209035D010 EU2B20SP159035 2LBAD1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)