

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P315193

Luminaire Tested: **LDA2B20NFL9727D010 PIN1MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P315193  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-2)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B20NFL9727D010 PIN1MB  
Description: PORTFOLIO 2IN ADJ 2000 LUMEN LED LUMINAIRE WITH NARROW FLOOD OPTIC  
AND 2in Adj PinHole, Black oculus black finish  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1264.0 lumens  
Efficiency: N/A  
Efficacy: 61.4 lumens/watt  
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.39  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 20.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P315193

CATALOG NUMBER: LDA2B20NFL9727D010 PIN1MB

### Luminous Intensity Polar Plot

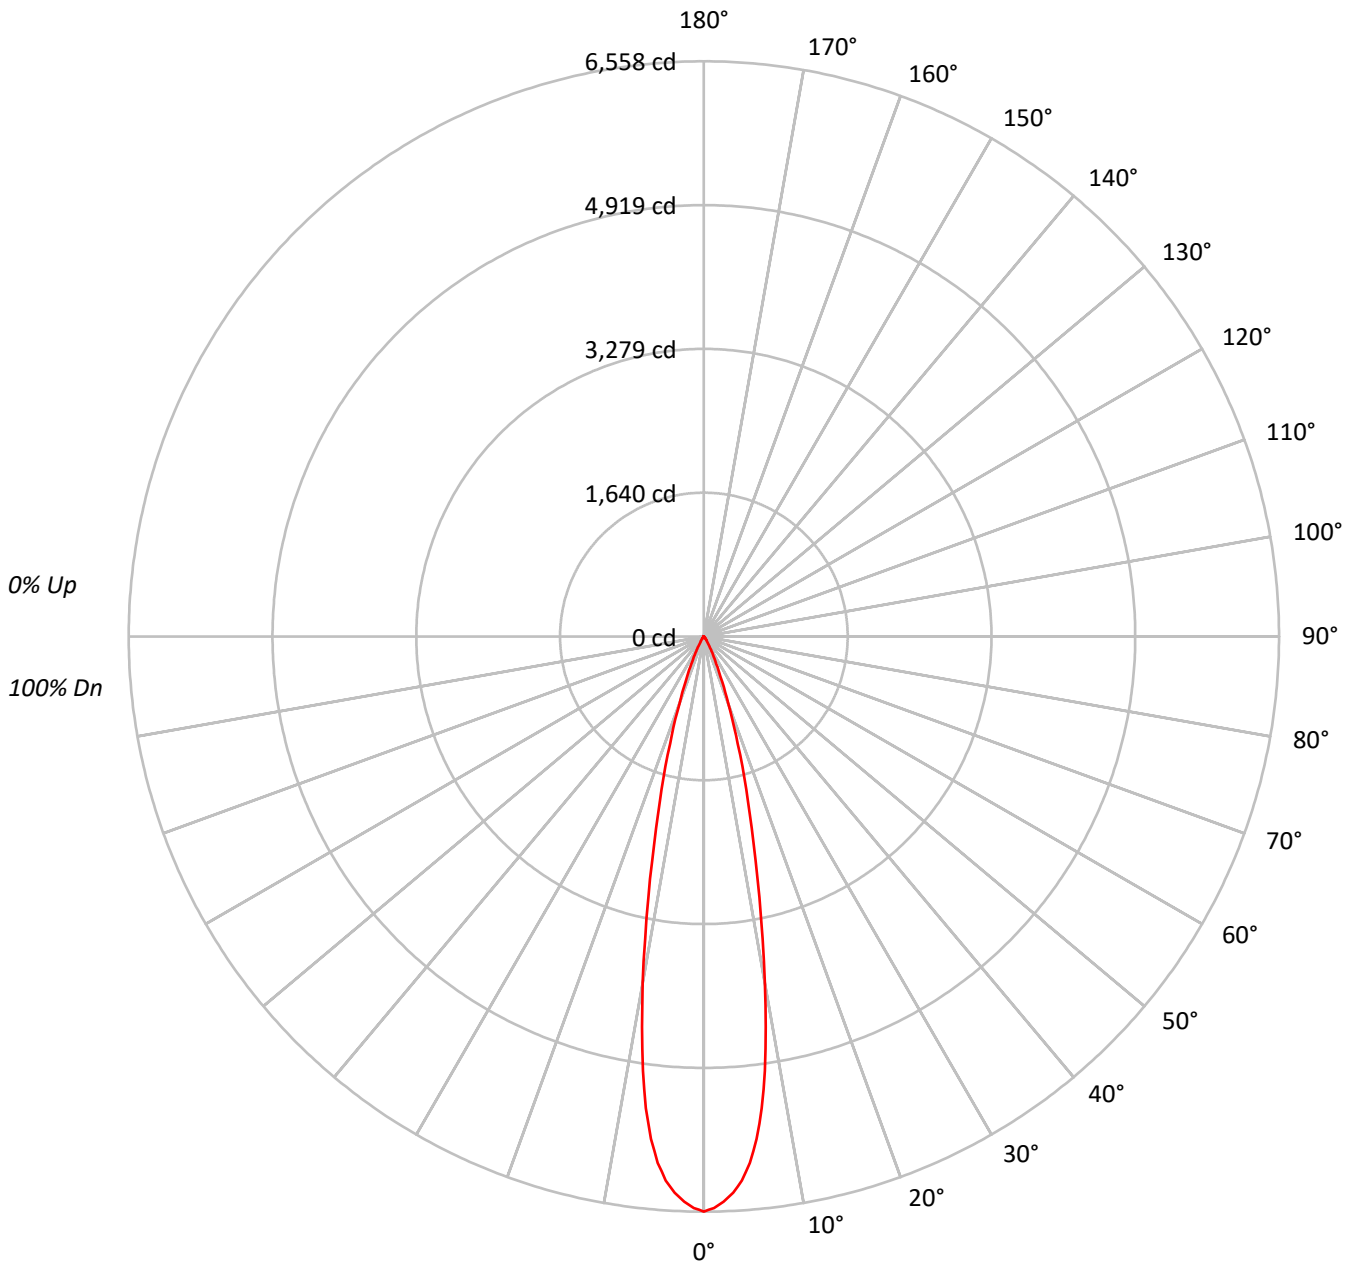



TEST NUMBER: P315193

CATALOG NUMBER: LDA2B20NFL9727D010 PIN1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100									100																			
1	115	113	111	110	113	111	109	108	107	106	105	103	102	102	100	99	99	97									97																			
2	112	108	105	103	110	107	104	102	103	101	100	101	99	98	98	97	96	94									94																			
3	108	104	100	98	107	103	99	97	100	98	95	98	96	94	96	94	93	91									91																			
4	105	100	96	94	104	99	96	93	97	94	92	95	93	91	94	92	90	89									89																			
5	102	97	93	90	101	96	92	90	94	91	89	93	90	88	92	89	87	86									86																			
6	100	94	90	87	98	93	89	87	92	89	86	91	88	86	89	87	85	84									84																			
7	97	91	87	84	96	90	87	84	89	86	84	88	85	83	87	85	83	82									82																			
8	95	88	85	82	94	88	84	82	87	84	81	86	83	81	85	83	81	80									80																			
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78									78																			
10	90	84	80	78	90	84	80	78	83	80	77	82	79	77	82	79	77	76									76																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3235319
5°	2983760
10°	2010654
15°	991345
20°	423432
25°	166467
30°	65514
35°	28729
40°	13847
45°	6628
50°	3684
55°	2064
60°	1184
65°	700
70°	865
75°	0
80°	0
85°	0



TEST NUMBER: P315193

CATALOG NUMBER: LDA2B20NFL9727D010 PIN1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	510.3	40.4
10°-20°	549.6	43.5
20°-30°	158.7	12.6
30°-40°	33.5	2.7
40°-50°	8.3	0.7
50°-60°	2.4	0.2
60°-70°	0.8	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1218.7	96.4
0°-40°	1252.2	99.1
0°-60°	1262.8	99.9
0°-90°	1264.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1264.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6558	
5°	6025	510
15°	1941	550
25°	306	159
35°	48	33
45°	10	8
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P315193

CATALOG NUMBER: LDA2B20NFL9727D010 PIN1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6557.7
1°	6516.6
2°	6446.8
3°	6352.6
4°	6219.1
5°	6024.8
6°	5762.5
7°	5420.3
8°	4999.5
9°	4508.9
10°	4013.5
11°	3512.8
12°	3040.1
13°	2620.5
14°	2251.5
15°	1940.9
17.5°	1282.8
20°	806.5
22.5°	496.0
25°	305.8
27.5°	186.6
30°	115.0
32.5°	72.7
35°	47.7
37.5°	31.6
40°	21.5
42.5°	14.9
45°	9.5
47.5°	6.0
50°	4.8
52.5°	3.6
55°	2.4
57.5°	1.8
60°	1.2
62.5°	1.2
65°	0.6
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.0
77.5°	0.6
80°	0.0
82.5°	0.0



TEST NUMBER: P315193

CATALOG NUMBER: LDA2B20NFL9727D010 PIN1MB

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)