

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P491775

Luminaire Tested: **LDA2B058027R70D010 2LBDLC1MMS**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P491775
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-81)
Test Lab: INNOVATION CENTER
Issue Date: 3/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDA2B058027R70D010 2LBDLC1MMS
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 2700K CCT LEDS
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 748.1 lumens
Efficiency: N/A
Efficacy: 106.9 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.06
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P491775

CATALOG NUMBER: LDA2B058027R70D010 2LBDLC1MMS

Luminous Intensity Polar Plot

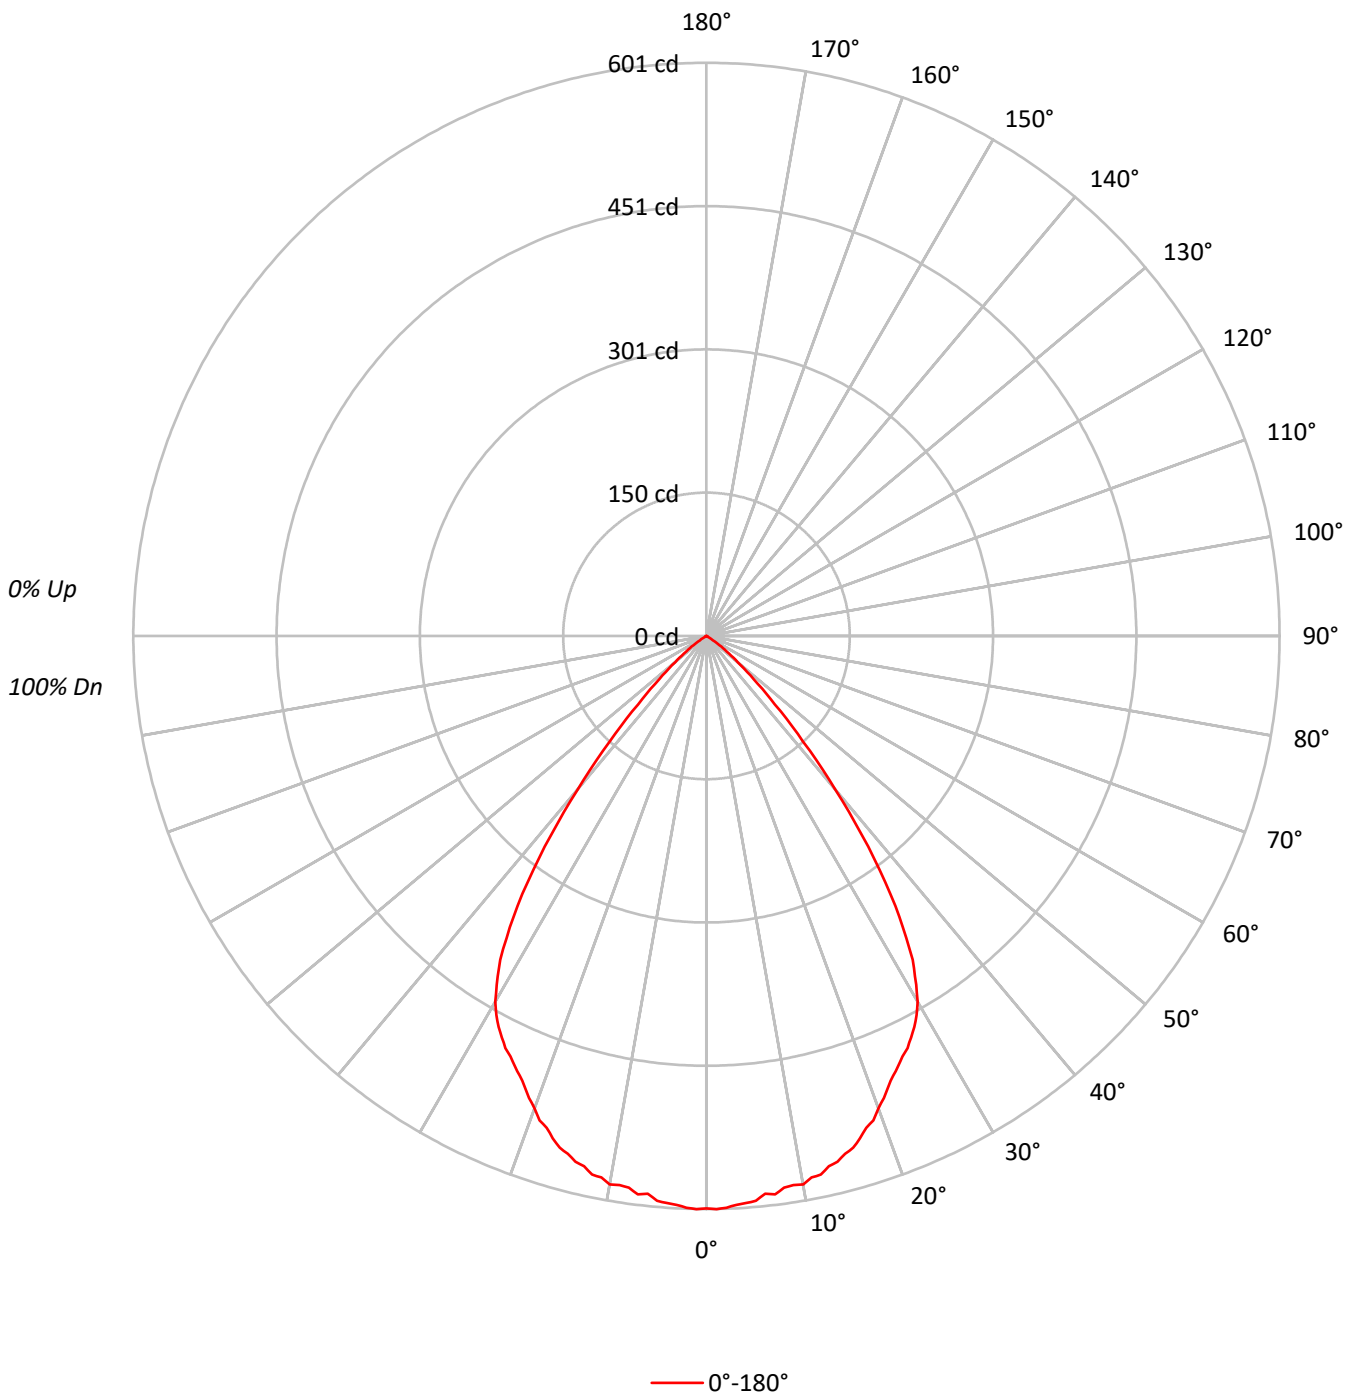



TEST NUMBER: P491775

CATALOG NUMBER: LDA2B058027R70D010 2LBDLC1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93					93			
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85					85			
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78					78			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72					72			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	74	71	67	66					66			
6	85	75	68	64	83	74	68	63	72	67	63	71	66	63	70	65	62	61					61			
7	80	70	63	59	78	69	63	58	68	62	58	66	61	58	65	61	57	56					56			
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52					52			
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48					48			
10	68	57	51	47	66	57	50	46	56	50	46	55	50	46	54	49	46	45					45			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	296165
5°	294473
10°	292518
15°	287050
20°	276688
25°	264888
30°	252314
35°	208209
40°	135312
45°	70749
50°	32927
55°	12042
60°	1184
65°	934
70°	577
75°	762
80°	0
85°	0



TEST NUMBER: P491775

CATALOG NUMBER: LDA2B058027R70D010 2LBDLC1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.2	7.5
10°-20°	157.9	21.1
20°-30°	224.2	30.0
30°-40°	209.6	28.0
40°-50°	84.3	11.3
50°-60°	14.7	2.0
60°-70°	0.7	0.1
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	438.3	58.6
0°-40°	647.9	86.6
0°-60°	747.0	99.9
0°-90°	748.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	748.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	600	
5°	595	56
15°	562	158
25°	487	224
35°	346	210
45°	101	84
55°	14	15
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P491775

CATALOG NUMBER: LDA2B058027R70D010 2LBDLC1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	600.3
1°	601.2
2°	599.9
3°	597.4
4°	596.2
5°	594.6
6°	588.0
7°	590.0
8°	584.3
9°	583.0
10°	583.9
11°	578.5
12°	577.3
13°	570.7
14°	568.2
15°	562.0
16°	558.3
17°	550.9
18°	542.2
19°	537.3
20°	527.0
21°	519.2
22.5°	504.7
23°	501.0
24°	494.0
25°	486.6
26°	480.8
27°	472.6
28°	464.4
29°	454.5
30°	442.9
32.5°	402.6
35°	345.7
37.5°	278.5
40°	210.1
42.5°	150.0
45°	101.4
47.5°	66.7
50°	42.9
52.5°	26.8
55°	14.0
57.5°	4.5
60°	1.2
62.5°	0.8
65°	0.8



TEST NUMBER: P491775

CATALOG NUMBER: LDA2B058027R70D010 2LBDLC1MMS

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.4
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)