

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P277881

Luminaire Tested: **LDA2B058035D010 EU2B05SP158035 2LBAD1GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P277881  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B058035D010 EU2B05SP158035 2LBAD1GPH  
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH SPOT OPTIC AND 2in  
ADJ spun Refl, Self-Flanged, GPH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 805.2 lumens  
Efficiency: N/A  
Efficacy: 115.0 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P277881

CATALOG NUMBER: LDA2B058035D010 EU2B05SP158035 2LBAD1GPH

### Luminous Intensity Polar Plot

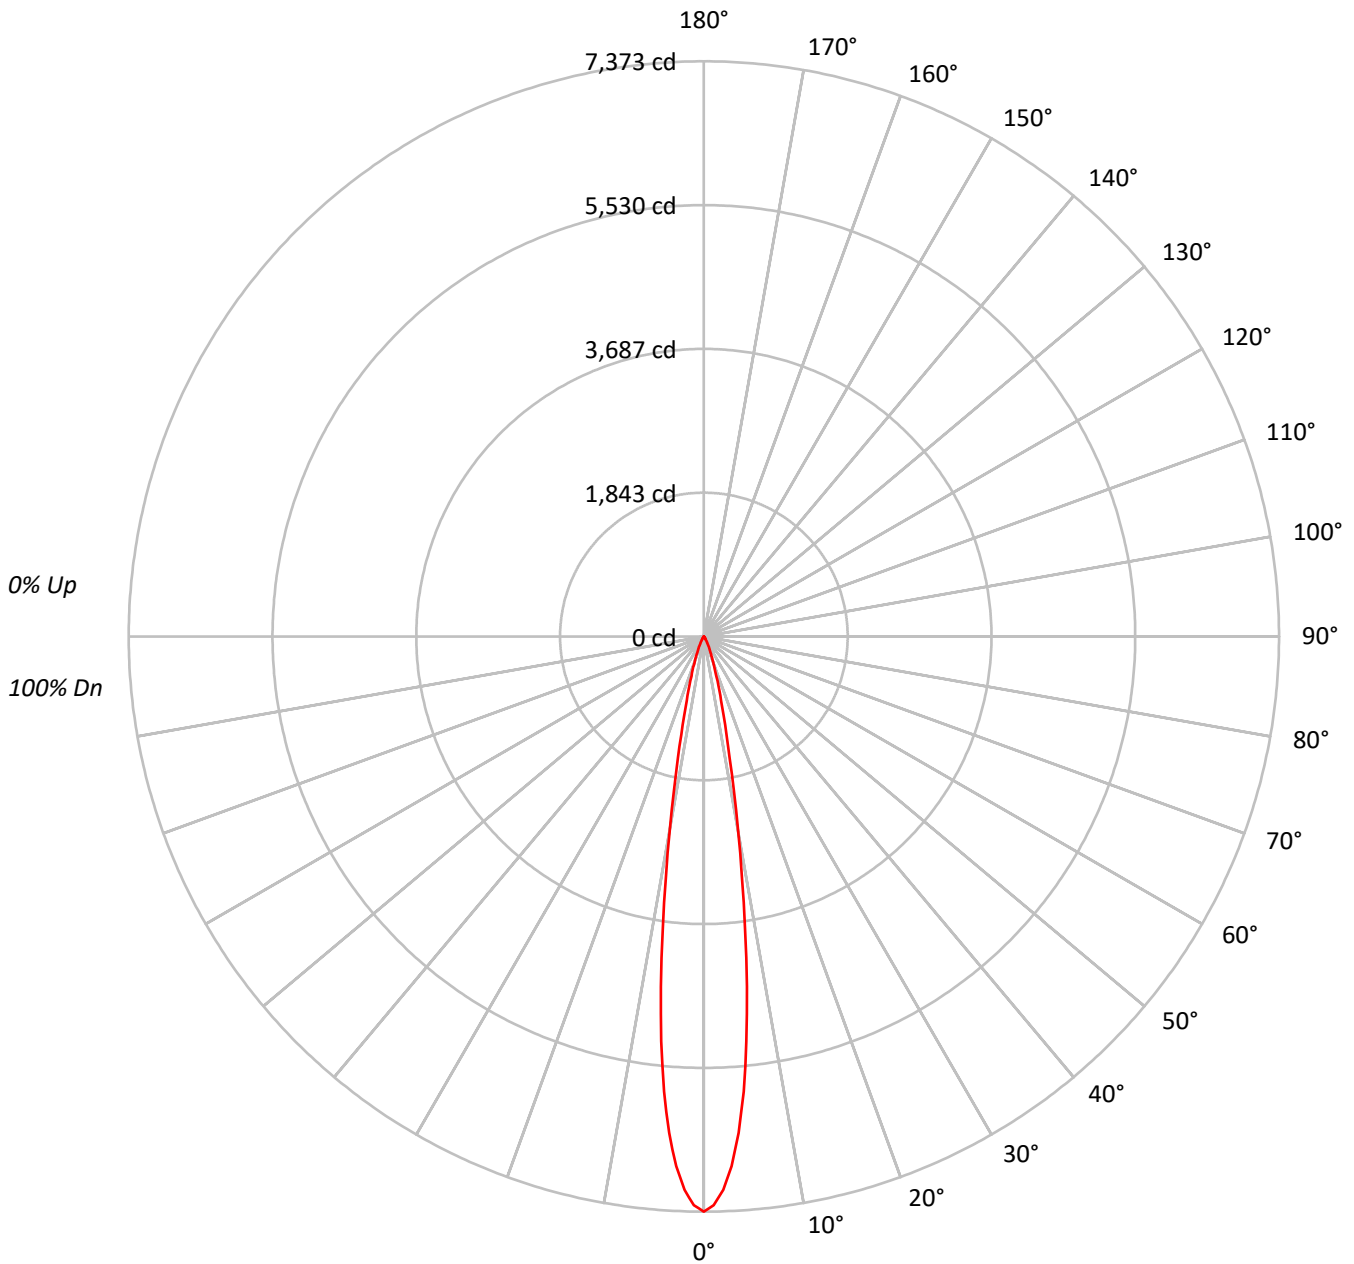



TEST NUMBER: P277881

CATALOG NUMBER: LDA2B058035D010 EU2B05SP158035 2LBAD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																				
2	112	109	107	104	110	108	105	103	105	103	101	102	100	99	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																						
3	109	105	102	100	108	104	101	99	102	99	98	100	98	96	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																								
4	107	102	99	96	105	101	98	96	99	97	95	98	95	94	96	94	93	92	91	90	89	88	87	86	85	84	83	82																										
5	104	99	96	93	103	99	95	93	97	94	92	96	93	91	94	92	91	90	89	88	87	86	85	84	83	82																												
6	102	97	93	91	101	96	93	91	95	92	90	94	91	89	93	91	89	88	87	86	85	84	83	82																														
7	100	95	91	89	99	94	91	88	93	90	88	92	90	88	91	89	87	86	85	84	83	82																																
8	98	93	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85	84	83	82																																	
9	96	91	87	85	95	90	87	85	90	87	85	89	86	84	88	86	84	83	82																																			
10	94	89	86	83	94	89	85	83	88	85	83	87	85	83	87	85	83	82																																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3637606
5°	2900113
10°	1259095
15°	435019
20°	178351
25°	80566
30°	32415
35°	15117
40°	8179
45°	3070
50°	1842
55°	1376
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P277881

CATALOG NUMBER: LDA2B058035D010 EU2B05SP158035 2LBAD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	442.6	55.0
10°-20°	265.8	33.0
20°-30°	73.2	9.1
30°-40°	17.4	2.2
40°-50°	4.3	0.5
50°-60°	1.4	0.2
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	781.5	97.1
0°-40°	798.9	99.2
0°-60°	804.7	99.9
0°-90°	805.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	805.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7373	
5°	5856	443
15°	852	266
25°	148	73
35°	25	17
45°	4	4
55°	2	1
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P277881

CATALOG NUMBER: LDA2B058035D010 EU2B05SP158035 2LBAD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7373.1
1°	7291.5
2°	7096.2
3°	6798.3
4°	6377.8
5°	5855.9
6°	5218.6
7°	4520.5
8°	3787.0
9°	3112.3
10°	2513.3
11°	2006.1
12°	1596.7
13°	1287.7
14°	1041.8
15°	851.7
17.5°	528.7
20°	339.7
22.5°	222.8
25°	148.0
27.5°	95.1
30°	56.9
32.5°	35.8
35°	25.1
37.5°	18.3
40°	12.7
42.5°	7.6
45°	4.4
47.5°	3.2
50°	2.4
52.5°	2.0
55°	1.6
57.5°	1.2
60°	0.8
62.5°	0.8
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P277881

CATALOG NUMBER: LDA2B058035D010 EU2B05SP158035 2LBAD1GPH

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)