

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P492068

Luminaire Tested: **LDA2B058035R30D010 2LBDLC1MB-30DEG TILT**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P492068  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/8/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B058035R30D010 2LBDLC1MB-30DEG TILT  
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 3500K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 542.4 lumens  
Efficiency: N/A  
Efficacy: 77.5 lumens/watt  
Spacing Criteria (0/90/45): 3.2 / 0.53 / 1.4  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P492068

CATALOG NUMBER: LDA2B058035R30D010 2LBDLC1MB-30DEG TILT

### Luminous Intensity Polar Plot

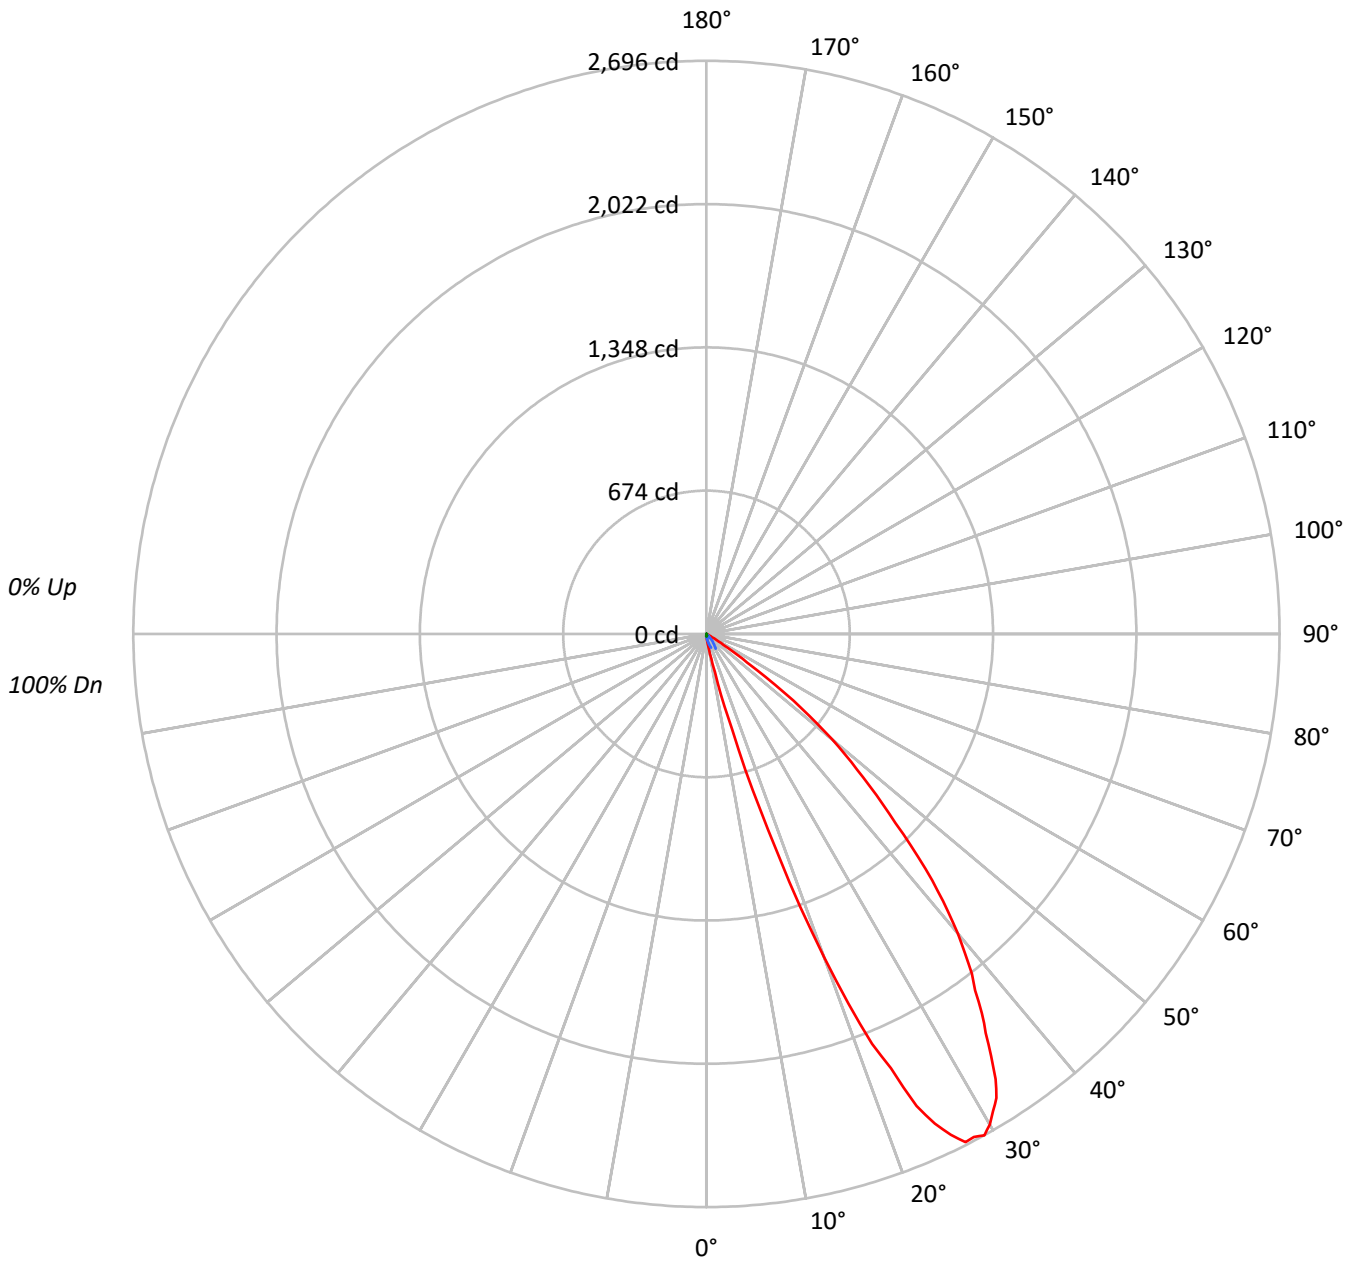

— 0°-180°    - - 45°-225°    - - - 90°-270°



TEST NUMBER: P492068

CATALOG NUMBER: LDA2B058035R30D010 2LBDLC1MB-30DEG TILT

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	109	106	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90					90			
2	104	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82	80					80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71					71			
4	90	80	73	68	88	79	72	67	77	71	66	75	70	66	73	68	65	63					63			
5	83	73	65	60	82	72	65	59	70	63	59	68	62	58	66	61	57	56					56			
6	77	66	58	52	76	65	58	52	63	57	52	62	56	51	60	55	51	49					49			
7	72	60	52	46	70	59	51	46	57	51	46	56	50	46	55	49	45	44					44			
8	66	54	46	41	65	54	46	41	52	46	41	51	45	41	50	44	40	39					39			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34					34			
10	57	45	38	33	56	45	37	33	44	37	32	43	37	32	42	36	32	31					31			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°
0°	6019	6019	6019
5°	13025	5448	3912
10°	39176	4709	2555
15°	237761	3422	1992
20°	851275	1838	840
25°	1383502	653	0
30°	1518382	228	0
35°	1379832	0	0
40°	1184322	0	0
45°	877800	0	0
50°	593611	0	0
55°	200501	344	0
60°	28714	789	0
65°	2335	934	0
70°	0	1154	0
75°	0	2287	0
80°	0	2273	0
85°	0	4529	0



TEST NUMBER: P492068

CATALOG NUMBER: LDA2B058035R30D010 2LBDLC1MB-30DEG TILT

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1.6	0.3
10°-20°	27.9	5.2
20°-30°	158.6	29.2
30°-40°	206.6	38.1
40°-50°	121.0	22.3
50°-60°	24.4	4.5
60°-70°	1.0	0.2
70°-80°	0.7	0.1
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	188.1	34.7
0°-40°	394.8	72.8
0°-60°	540.2	99.6
0°-90°	542.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	542.4	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	12	12	12	12	12	
5°	26	19	11	9	8	4
15°	466	53	7	4	4	197
25°	2542	89	1	1	0	1124
35°	2291	65	0	0	0	1427
45°	1258	16	0	0	0	983
55°	233	2	0	0	0	272
65°	2	0	1	1	0	6
75°	0	1	1	1	0	0
85°	0	1	1	1	0	0
90°	0	0	0	0	0	



TEST NUMBER: P492068

CATALOG NUMBER: LDA2B058035R30D010 2LBDLC1MB-30DEG TILT

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
0°	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2
2.5°	16.5	15.3	14.5	12.6	11.4	10.6	10.2	9.8	9.4
5°	26.3	24.4	18.9	13.8	11.0	9.4	8.6	7.9	7.9
7.5°	45.2	36.6	24.8	14.5	10.2	8.3	7.5	6.3	5.9
10°	78.2	60.9	33.8	15.3	9.4	7.5	5.9	5.5	5.1
12.5°	183.6	111.3	42.9	15.3	8.3	6.3	5.1	4.7	4.3
15°	465.5	226.9	53.1	14.5	6.7	4.7	4.3	3.9	3.9
17.5°	965.6	465.9	64.5	13.4	5.5	3.5	3.1	2.8	2.8
20°	1621.4	835.1	75.5	11.4	3.5	2.4	2.0	1.6	1.6
21°	1862.8	969.2	81.0	10.6	3.1	2.0	1.6	1.6	1.2
22°	2079.9	1092.2	84.1	10.2	2.4	1.6	1.6	1.2	1.2
23°	2219.8	1248.3	86.9	9.0	2.0	1.2	1.2	0.8	0.4
24°	2431.0	1370.6	88.1	8.3	1.6	1.2	0.8	0.4	0.4
25°	2541.5	1481.5	89.2	7.5	1.2	1.2	0.8	0.4	0.0
26°	2620.9	1569.1	93.6	7.1	1.2	0.8	0.8	0.4	0.0
27°	2683.0	1625.0	95.9	6.3	0.8	0.8	0.8	0.0	0.0
28°	2679.5	1665.5	94.0	5.5	0.8	0.8	0.4	0.0	0.0
29°	2696.4	1693.0	92.8	4.7	0.4	0.4	0.4	0.0	0.0
30°	2665.3	1695.4	88.5	4.3	0.4	0.4	0.4	0.0	0.0
31°	2618.1	1666.6	86.9	3.9	0.0	0.4	0.4	0.0	0.0
32°	2573.7	1653.7	81.8	3.1	0.0	0.4	0.4	0.0	0.0
33°	2497.4	1595.5	76.7	2.8	0.0	0.4	0.0	0.0	0.0
34°	2395.2	1538.5	72.0	2.4	0.0	0.4	0.0	0.0	0.0
35°	2291.0	1491.3	65.3	2.4	0.0	0.4	0.0	0.0	0.0
36°	2204.5	1405.6	60.5	2.0	0.0	0.4	0.0	0.0	0.0
37°	2099.5	1332.1	54.3	1.6	0.0	0.0	0.0	0.0	0.0
38°	2028.0	1228.7	49.5	1.6	0.0	0.0	0.0	0.0	0.0
39°	1931.6	1141.4	43.6	1.2	0.0	0.0	0.0	0.0	0.0
40°	1838.9	1050.9	37.7	0.8	0.0	0.0	0.0	0.0	0.0
42.5°	1572.7	810.7	25.9	0.4	0.0	0.0	0.0	0.0	0.0
45°	1258.1	594.5	16.1	0.0	0.0	0.0	0.0	0.0	0.0
47.5°	999.0	401.4	10.2	0.0	0.0	0.0	0.0	0.0	0.0
50°	773.4	206.8	5.9	0.0	0.0	0.0	0.0	0.0	0.0
52.5°	514.3	87.7	3.5	0.0	0.0	0.4	0.0	0.0	0.0
55°	233.1	45.6	1.6	0.0	0.4	0.4	0.4	0.0	0.0
57.5°	94.0	19.7	0.8	0.4	0.4	0.4	0.4	0.0	0.0
60°	29.1	5.5	0.4	0.4	0.8	0.8	0.4	0.0	0.0
62.5°	5.9	1.2	0.4	0.8	0.8	0.8	0.4	0.0	0.0
65°	2.0	0.4	0.4	0.8	0.8	0.8	0.8	0.0	0.0
67.5°	0.4	0.4	0.4	0.8	0.8	0.8	0.8	0.4	0.0
70°	0.0	0.4	0.8	0.8	0.8	1.2	0.8	0.4	0.0
72.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0
75°	0.0	0.4	0.8	0.8	1.2	1.2	0.8	0.4	0.0
77.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0
80°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0



TEST NUMBER: P492068

CATALOG NUMBER: LDA2B058035R30D010 2LBDLC1MB-30DEG TILT

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°	180°
82.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.4	0.0
85°	0.0	0.4	0.8	0.8	0.8	0.8	0.8	0.0	0.0
87.5°	0.0	0.4	0.8	0.8	0.8	0.8	0.4	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)