

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P314886

Luminaire Tested: **LDA2B05NFL8035D010 PINW1MMS**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P314886  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-2)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B05NFL8035D010 PINW1MMS  
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH NARROW FLOOD OPTIC  
AND 2in Adj PinHole, White oculus, matte metallic silver finish  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 738.4 lumens  
Efficiency: N/A  
Efficacy: 105.5 lumens/watt  
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.39  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P314886

CATALOG NUMBER: LDA2B05NFL8035D010 PINW1MMS

### Luminous Intensity Polar Plot

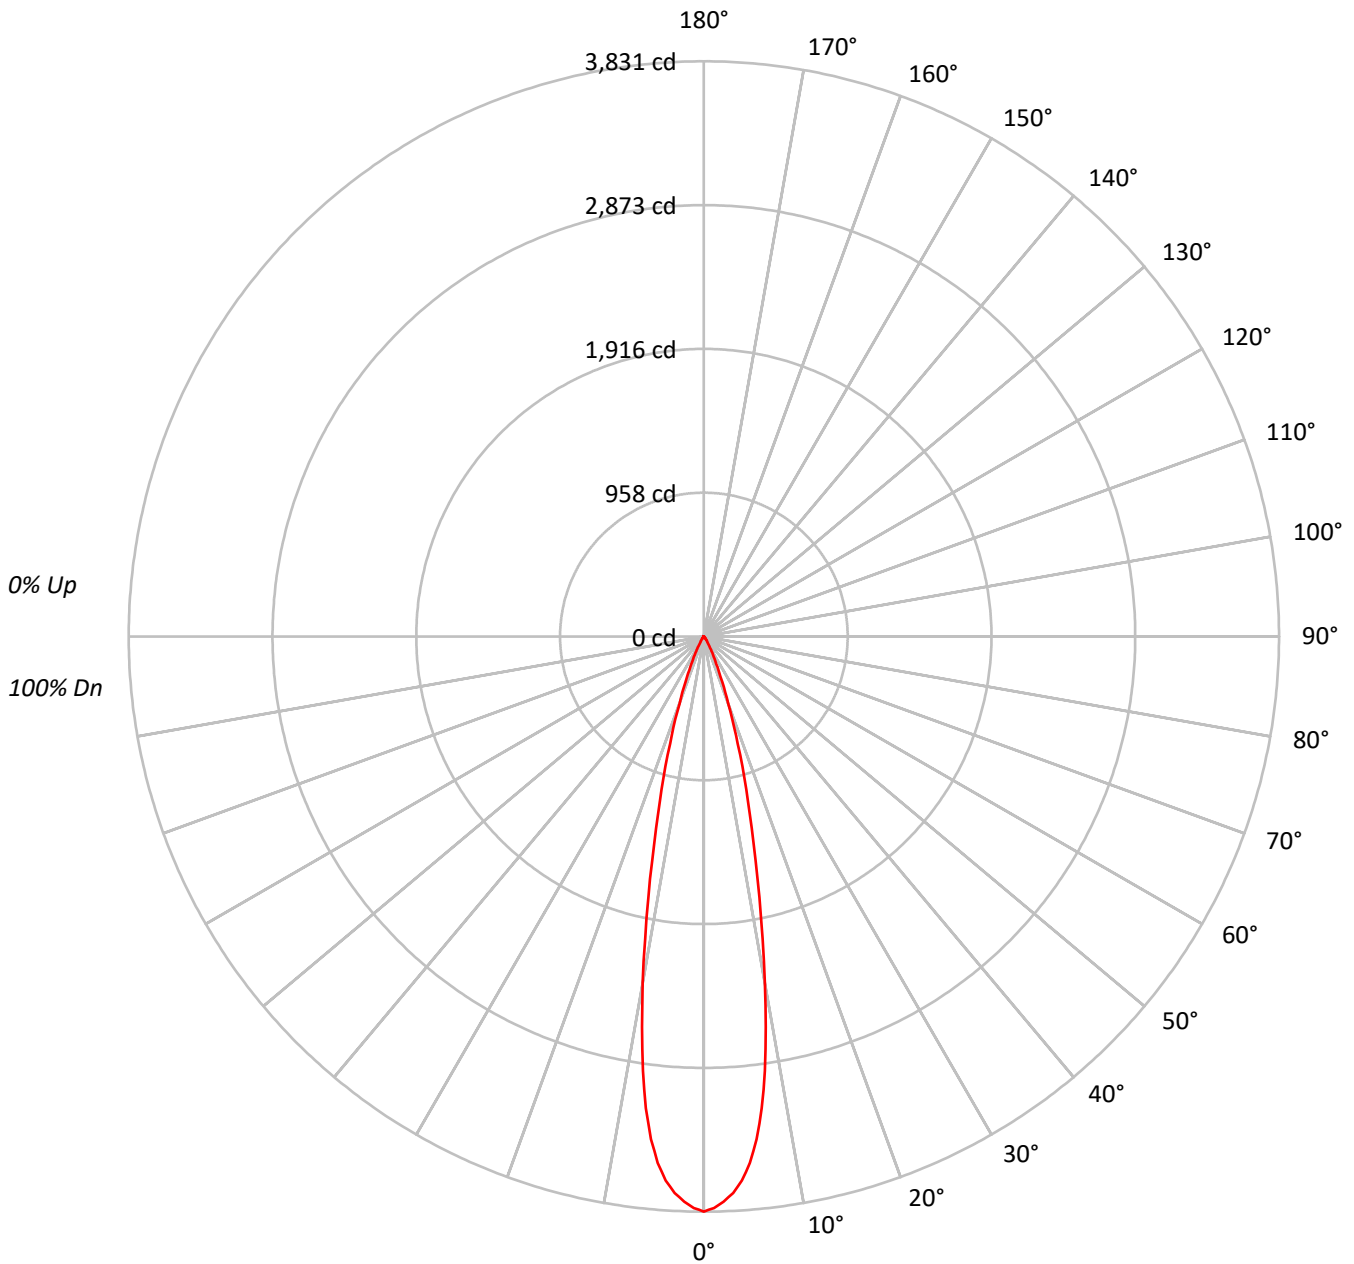



TEST NUMBER: P314886

CATALOG NUMBER: LDA2B05NFL8035D010 PINW1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100									100																		
1	115	113	111	110	113	111	109	108	107	106	105	103	102	102	100	99	99	97									97																		
2	112	108	105	103	110	107	104	102	103	101	100	101	99	98	98	97	96	94									94																		
3	108	104	100	98	107	103	99	97	100	98	95	98	96	94	96	94	93	91									91																		
4	105	100	96	94	104	99	96	93	97	94	92	95	93	91	94	92	90	89									89																		
5	102	97	93	90	101	96	92	90	94	91	89	93	90	88	92	89	87	86									86																		
6	100	94	90	87	98	93	89	87	92	89	86	91	88	86	89	87	85	84									84																		
7	97	91	87	84	96	90	87	84	89	86	84	88	85	83	87	85	83	82									82																		
8	95	88	85	82	94	88	84	82	87	84	81	86	83	81	85	83	81	80									80																		
9	92	86	82	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78									78																		
10	90	84	80	78	90	84	80	78	83	80	78	82	79	77	82	79	77	76									76																		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1890069
5°	1743119
10°	1174631
15°	579157
20°	247392
25°	97224
30°	38283
35°	16804
40°	8050
45°	3907
50°	2149
55°	1204
60°	691
65°	350
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P314886

CATALOG NUMBER: LDA2B05NFL8035D010 PINW1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	298.1	40.4
10°-20°	321.1	43.5
20°-30°	92.7	12.6
30°-40°	19.6	2.7
40°-50°	4.8	0.7
50°-60°	1.4	0.2
60°-70°	0.4	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	711.9	96.4
0°-40°	731.5	99.1
0°-60°	737.7	99.9
0°-90°	738.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	738.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3831	
5°	3520	298
15°	1134	321
25°	179	93
35°	28	20
45°	6	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P314886

CATALOG NUMBER: LDA2B05NFL8035D010 PINW1MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3831.0
1°	3807.0
2°	3766.2
3°	3711.2
4°	3633.2
5°	3519.7
6°	3366.5
7°	3166.6
8°	2920.7
9°	2634.1
10°	2344.7
11°	2052.2
12°	1776.0
13°	1530.9
14°	1315.3
15°	1133.9
17.5°	749.4
20°	471.2
22.5°	289.7
25°	178.6
27.5°	109.0
30°	67.2
32.5°	42.5
35°	27.9
37.5°	18.5
40°	12.5
42.5°	8.7
45°	5.6
47.5°	3.5
50°	2.8
52.5°	2.1
55°	1.4
57.5°	1.0
60°	0.7
62.5°	0.7
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.3
80°	0.0
82.5°	0.0



TEST NUMBER: P314886

CATALOG NUMBER: LDA2B05NFL8035D010 PINW1MMS

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)