

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P279255

Luminaire Tested: **LDA2B058040D010 EU2B05FL408040 2LBAD1WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P279255
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-3)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B058040D010 EU2B05FL408040 2LBAD1WH
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH FLOOD OPTIC AND 2in
ADJ spun Refl, Self-Flanged, WH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 901.0 lumens
Efficiency: N/A
Efficacy: 128.7 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.55
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P279255

CATALOG NUMBER: LDA2B058040D010 EU2B05FL408040 2LBAD1WH

Luminous Intensity Polar Plot

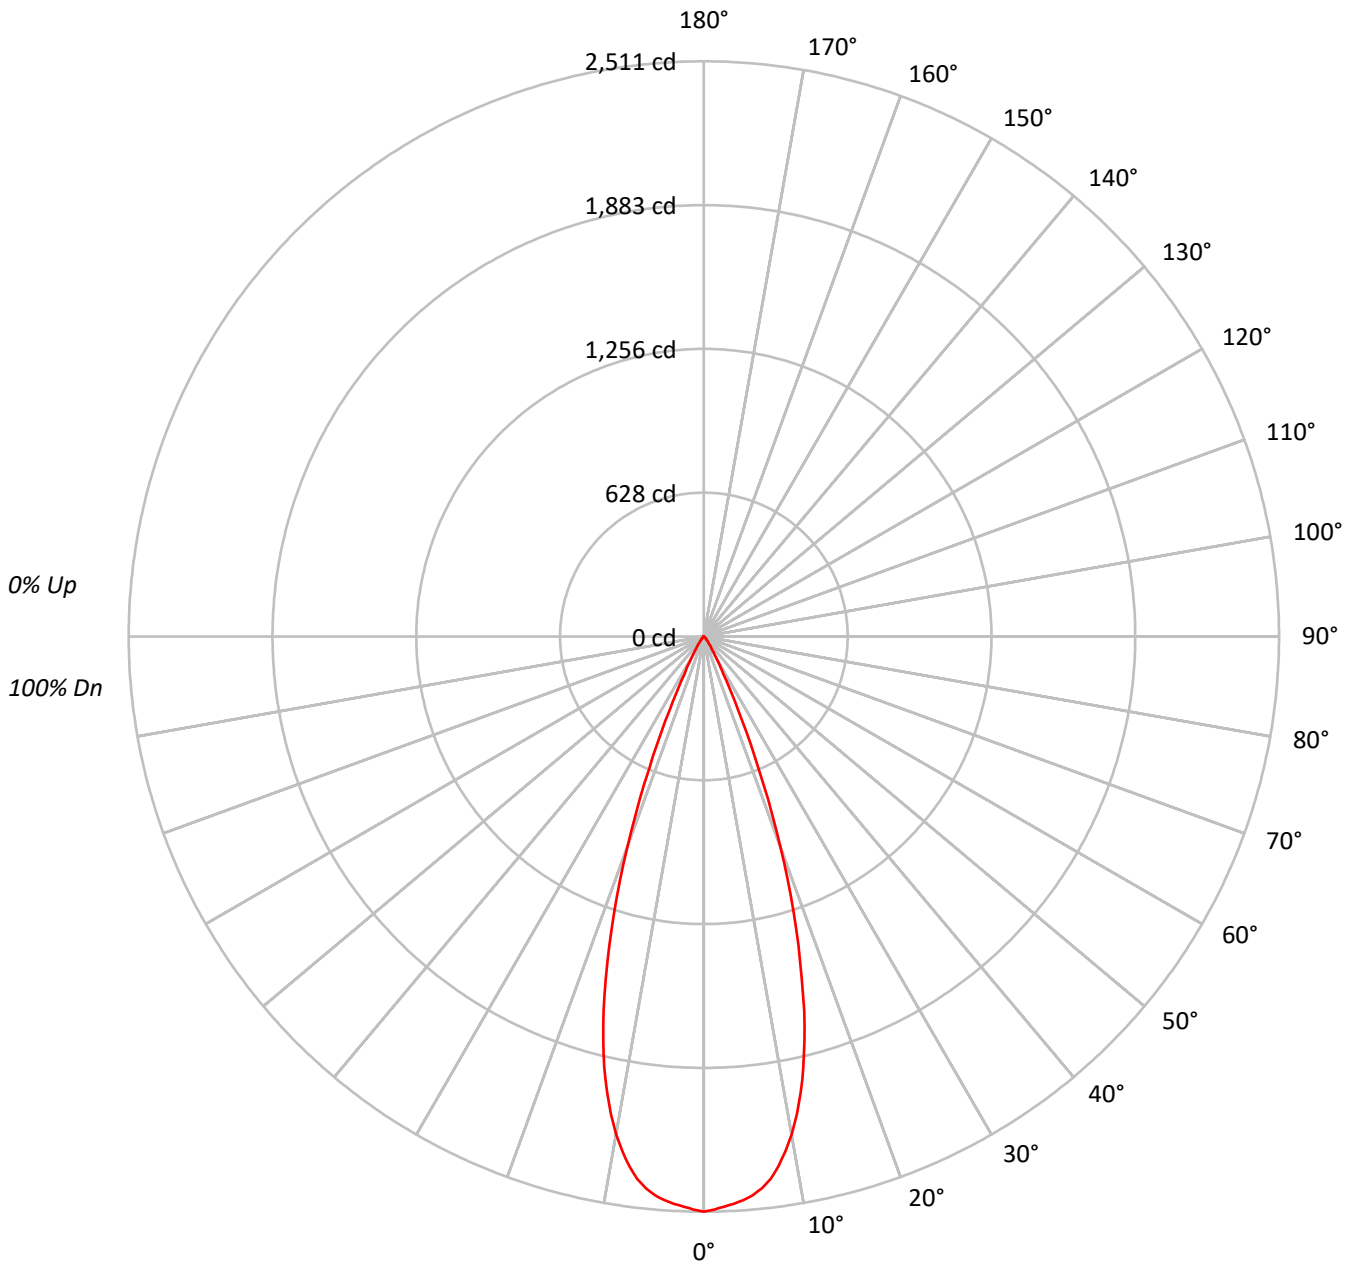



TEST NUMBER: P279255

CATALOG NUMBER: LDA2B058040D010 EU2B05FL408040 2LBAD1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																	
	1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96	96	96	96	96	96	96	96																	
	2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92	92	92	92	92	92	92	92	92	92	92																	
	3	107	102	98	95	105	101	97	94	98	95	93	96	94	92	94	92	90	89	89	89	89	89	89	89	89	89	89	89																	
	4	103	98	93	90	102	97	93	90	95	91	89	93	90	88	91	89	87	85	85	85	85	85	85	85	85	85	85	85																	
	5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82	82	82	82	82	82	82	82	82	82	82																	
	6	97	90	85	82	95	89	85	82	88	84	82	87	83	81	85	83	80	79	79	79	79	79	79	79	79	79	79	79																	
	7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77	77	77	77	77	77	77	77	77	77	77																	
	8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74	74	74	74	74	74	74	74	74	74	74																	
	9	88	81	76	73	87	80	76	73	79	76	73	79	75	73	78	75	73	72	72	72	72	72	72	72	72	72	72	72																	
	10	85	78	74	71	84	78	74	71	77	73	71	76	73	70	76	72	70	69	69	69	69	69	69	69	69	69	69	69																	

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1238930
5°	1212710
10°	1105296
15°	863449
20°	511217
25°	190038
30°	59361
35°	26380
40°	12237
45°	5791
50°	3147
55°	1806
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P279255

CATALOG NUMBER: LDA2B058040D010 EU2B05FL408040 2LBAD1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.4	25.1
10°-20°	450.1	50.0
20°-30°	184.4	20.5
30°-40°	30.5	3.4
40°-50°	7.2	0.8
50°-60°	1.9	0.2
60°-70°	0.4	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	860.8	95.5
0°-40°	891.4	98.9
0°-60°	900.5	99.9
0°-90°	901.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	901.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2511	
5°	2449	226
15°	1690	450
25°	349	184
35°	44	31
45°	8	7
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P279255

CATALOG NUMBER: LDA2B058040D010 EU2B05FL408040 2LBAD1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2511.2
1°	2502.5
2°	2490.9
3°	2480.6
4°	2466.9
5°	2448.7
6°	2421.8
7°	2386.7
8°	2336.6
9°	2275.8
10°	2206.3
11°	2125.7
12°	2034.7
13°	1930.9
14°	1815.5
15°	1690.5
17.5°	1340.6
20°	973.7
22.5°	623.4
25°	349.1
27.5°	184.1
30°	104.2
32.5°	66.2
35°	43.8
37.5°	29.0
40°	19.0
42.5°	12.4
45°	8.3
47.5°	5.8
50°	4.1
52.5°	2.9
55°	2.1
57.5°	1.2
60°	0.8
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P279255

CATALOG NUMBER: LDA2B058040D010 EU2B05FL408040 2LBAD1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)