

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P492388

Luminaire Tested: **LDA2B058040R65D010 2LBD1WMH**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P492388  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-66)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/8/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B058040R65D010 2LBD1WMH  
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 80 CRI LEDS AND 4000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 828.6 lumens  
Efficiency: N/A  
Efficacy: 118.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.95  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P492388

CATALOG NUMBER: LDA2B058040R65D010 2LBD1WMH

### Luminous Intensity Polar Plot

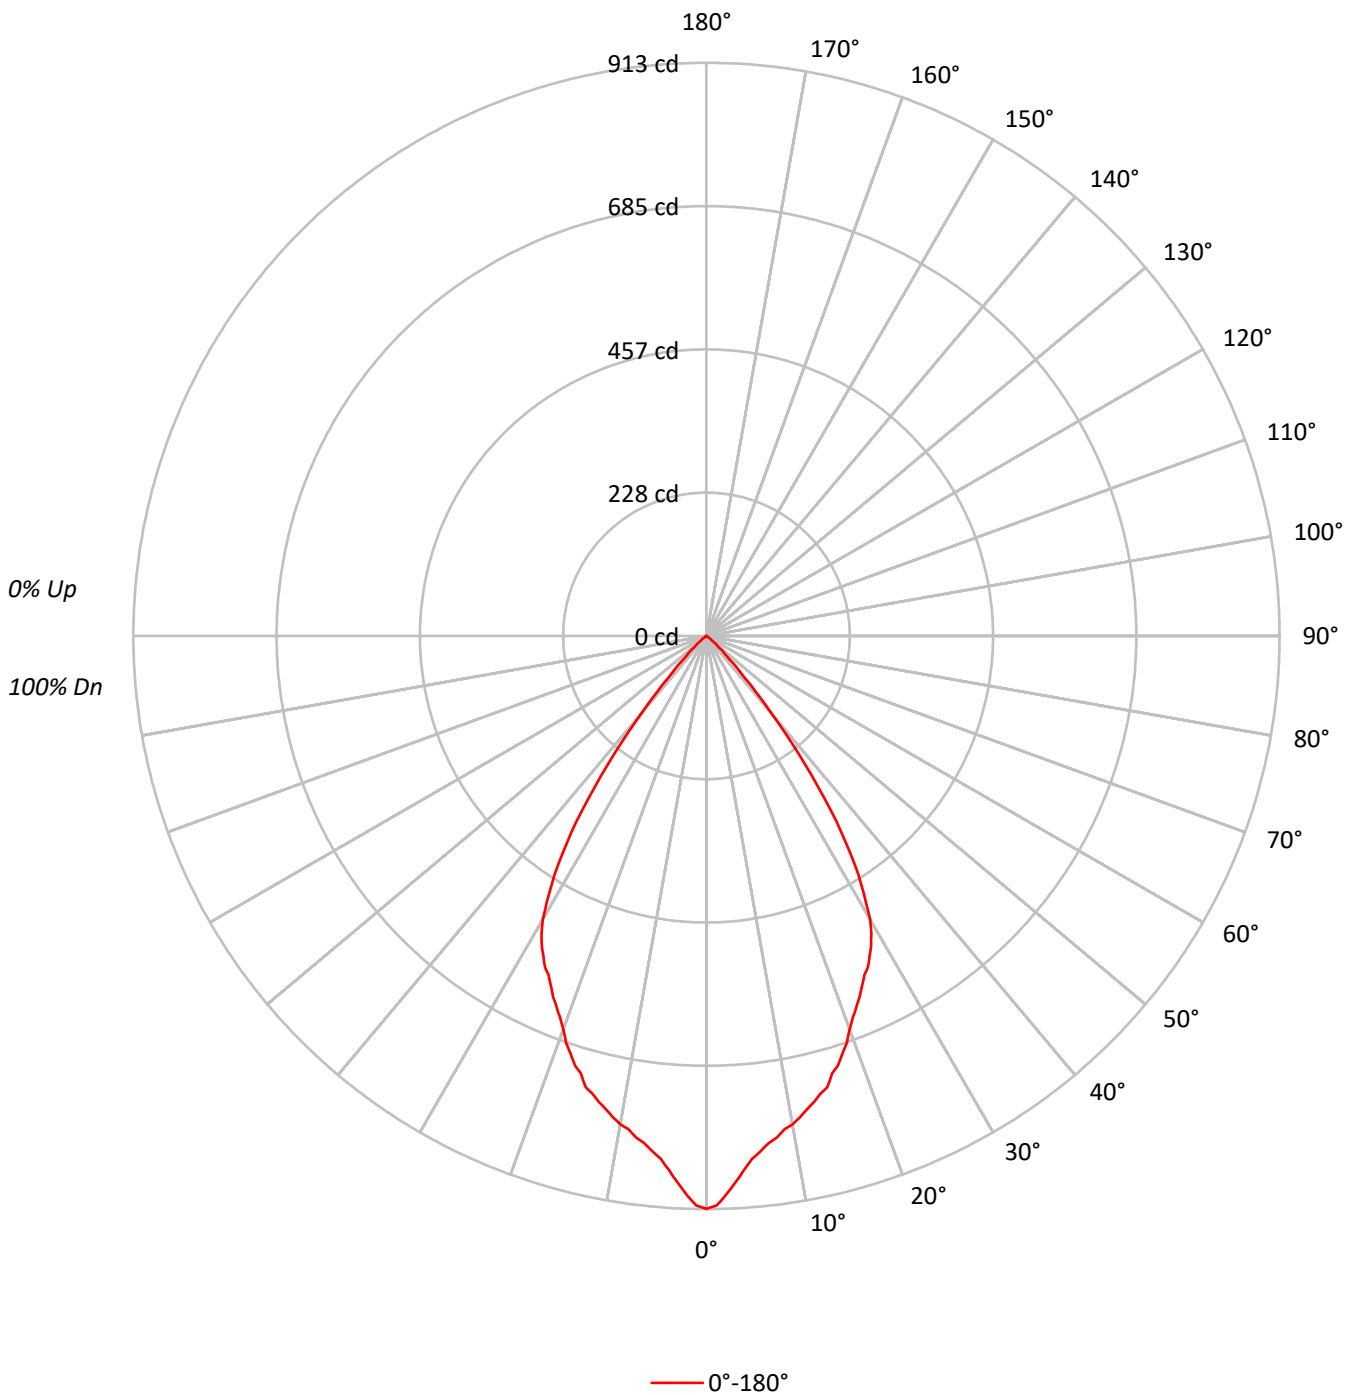



TEST NUMBER: P492388

CATALOG NUMBER: LDA2B058040R65D010 2LBD1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	111	108	106	111	109	106	104	104	103	101		101	99	98		97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78		84	80	77		82	79	76	75
5	92	83	78	73	90	82	77	73	81	76	72		79	75	72		77	74	71	69
6	87	78	72	68	86	77	72	67	76	71	67		74	70	66		73	69	66	65
7	83	73	67	63	81	73	67	63	71	66	62		70	65	62		69	65	62	60
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65	61	58	56
9	75	65	59	55	73	64	58	54	63	58	54		62	58	54		61	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51		59	54	51		58	54	51	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	450242
5°	414075
10°	395718
15°	380010
20°	350034
25°	324169
30°	297034
35°	218147
40°	103304
45°	33979
50°	10976
55°	1376
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P492388

CATALOG NUMBER: LDA2B058040R65D010 2LBD1WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.5	9.5
10°-20°	206.9	25.0
20°-30°	274.5	33.1
30°-40°	217.1	26.2
40°-50°	47.4	5.7
50°-60°	3.5	0.4
60°-70°	0.4	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	559.9	67.6
0°-40°	777.1	93.8
0°-60°	828.0	99.9
0°-90°	828.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	828.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	913	
5°	836	79
15°	744	207
25°	596	274
35°	362	217
45°	49	47
55°	2	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P492388

CATALOG NUMBER: LDA2B058040R65D010 2LBD1WMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	912.6
1°	907.7
2°	890.9
3°	872.5
4°	853.3
5°	836.1
6°	825.1
7°	814.0
8°	806.6
9°	795.6
10°	789.9
11°	780.9
12°	770.6
13°	761.6
14°	751.4
15°	744.0
16°	725.2
17°	715.8
18°	700.2
19°	685.9
20°	666.7
21°	651.1
22.5°	630.7
23°	624.9
24°	609.4
25°	595.5
26°	586.9
27°	572.5
28°	558.6
29°	541.8
30°	521.4
32.5°	450.2
35°	362.2
37.5°	258.2
40°	160.4
42.5°	90.4
45°	48.7
47.5°	26.2
50°	14.3
52.5°	6.1
55°	1.6
57.5°	0.8
60°	0.8
62.5°	0.4
65°	0.4



TEST NUMBER: P492388

CATALOG NUMBER: LDA2B058040R65D010 2LBD1WMH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.4
70°	0.4
72.5°	0.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)