

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P277893

Luminaire Tested: **LDA2B058050D010 EU2B05SP158050 2LBAD1B**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P277893  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-1)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B058050D010 EU2B05SP158050 2LBAD1B  
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH SPOT OPTIC AND 2in  
ADJ spun Refl, Self-Flanged, B  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 832.6 lumens  
Efficiency: N/A  
Efficacy: 118.9 lumens/watt  
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P277893

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1B

### Luminous Intensity Polar Plot

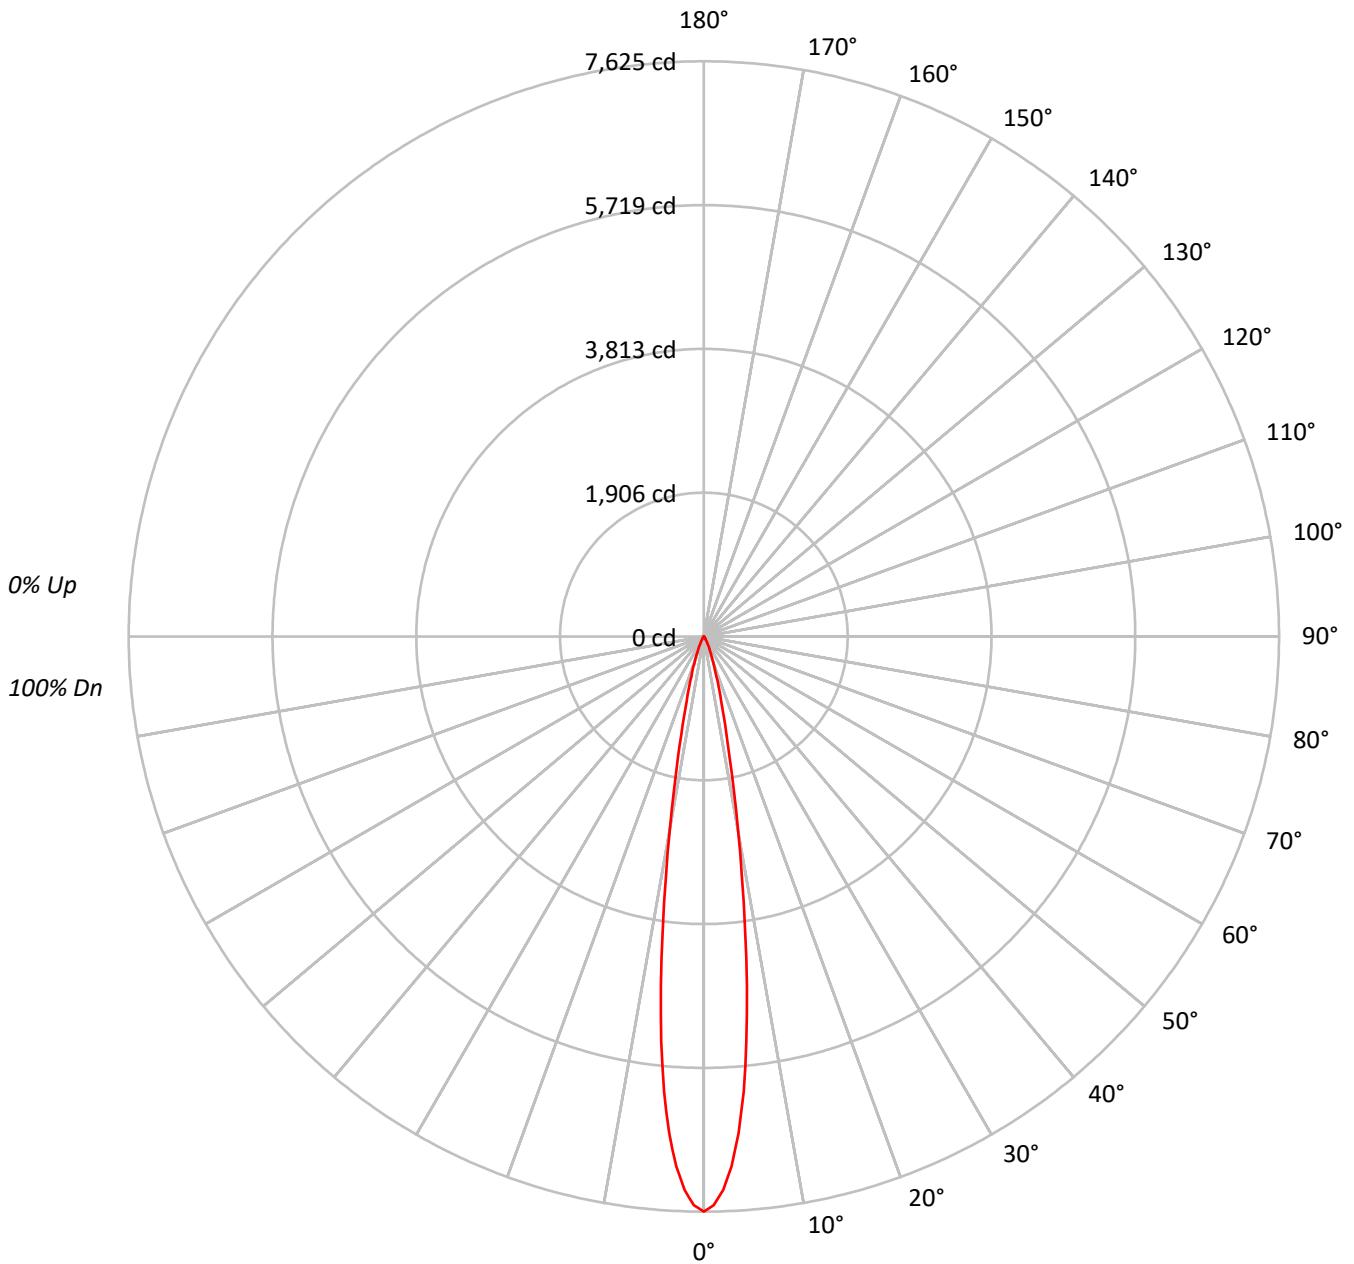



TEST NUMBER: P277893

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																				
2	112	109	107	104	110	108	105	103	105	103	101	102	100	99	99	98	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																						
3	110	105	102	100	108	104	101	99	102	99	98	100	98	96	97	96	95	94	93	92	91	90	89	88	87	86	85	84	83	82																								
4	107	102	99	96	105	101	98	96	99	97	95	98	95	94	96	94	93	92	91	90	89	88	87	86	85	84	83	82																										
5	104	99	96	93	103	99	95	93	97	94	92	96	93	91	94	92	91	90	89	88	87	86	85	84	83	82																												
6	102	97	93	91	101	96	93	91	95	92	90	94	91	89	93	91	89	88	87	86	85	84	83	82																														
7	100	95	91	89	99	94	91	88	93	90	88	92	90	88	91	89	87	86	85	84	83	82																																
8	98	93	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85	84	83	82																																	
9	96	91	87	85	95	90	87	85	90	87	85	89	86	84	88	86	84	83	82																																			
10	94	89	86	83	94	89	85	83	88	85	83	87	85	83	87	85	83	82																																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	3761686
5°	2999063
10°	1302028
15°	449831
20°	184441
25°	83288
30°	33497
35°	15599
40°	8501
45°	3140
50°	1919
55°	1376
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P277893

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	457.7	55.0
10°-20°	274.9	33.0
20°-30°	75.7	9.1
30°-40°	18.0	2.2
40°-50°	4.4	0.5
50°-60°	1.5	0.2
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	808.2	97.1
0°-40°	826.2	99.2
0°-60°	832.0	99.9
0°-90°	832.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	832.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7625	
5°	6056	458
15°	881	275
25°	153	76
35°	26	18
45°	4	4
55°	2	1
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P277893

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7624.6
1°	7540.3
2°	7338.3
3°	7030.2
4°	6595.4
5°	6055.7
6°	5396.7
7°	4674.7
8°	3916.2
9°	3218.5
10°	2599.0
11°	2074.5
12°	1651.2
13°	1331.6
14°	1077.4
15°	880.7
17.5°	546.7
20°	351.3
22.5°	230.4
25°	153.0
27.5°	98.3
30°	58.8
32.5°	37.0
35°	25.9
37.5°	18.9
40°	13.2
42.5°	7.8
45°	4.5
47.5°	3.3
50°	2.5
52.5°	2.1
55°	1.6
57.5°	1.2
60°	0.8
62.5°	0.8
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P277893

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1B

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)