

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P277894

Luminaire Tested: **LDA2B058050D010 EU2B05SP158050 2LBAD1WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P277894
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B058050D010 EU2B05SP158050 2LBAD1WMH
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH SPOT OPTIC AND 2in
ADJ spun Refl, Self-Flanged, WMH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 832.6 lumens
Efficiency: N/A
Efficacy: 118.9 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P277894

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1WMH

Luminous Intensity Polar Plot

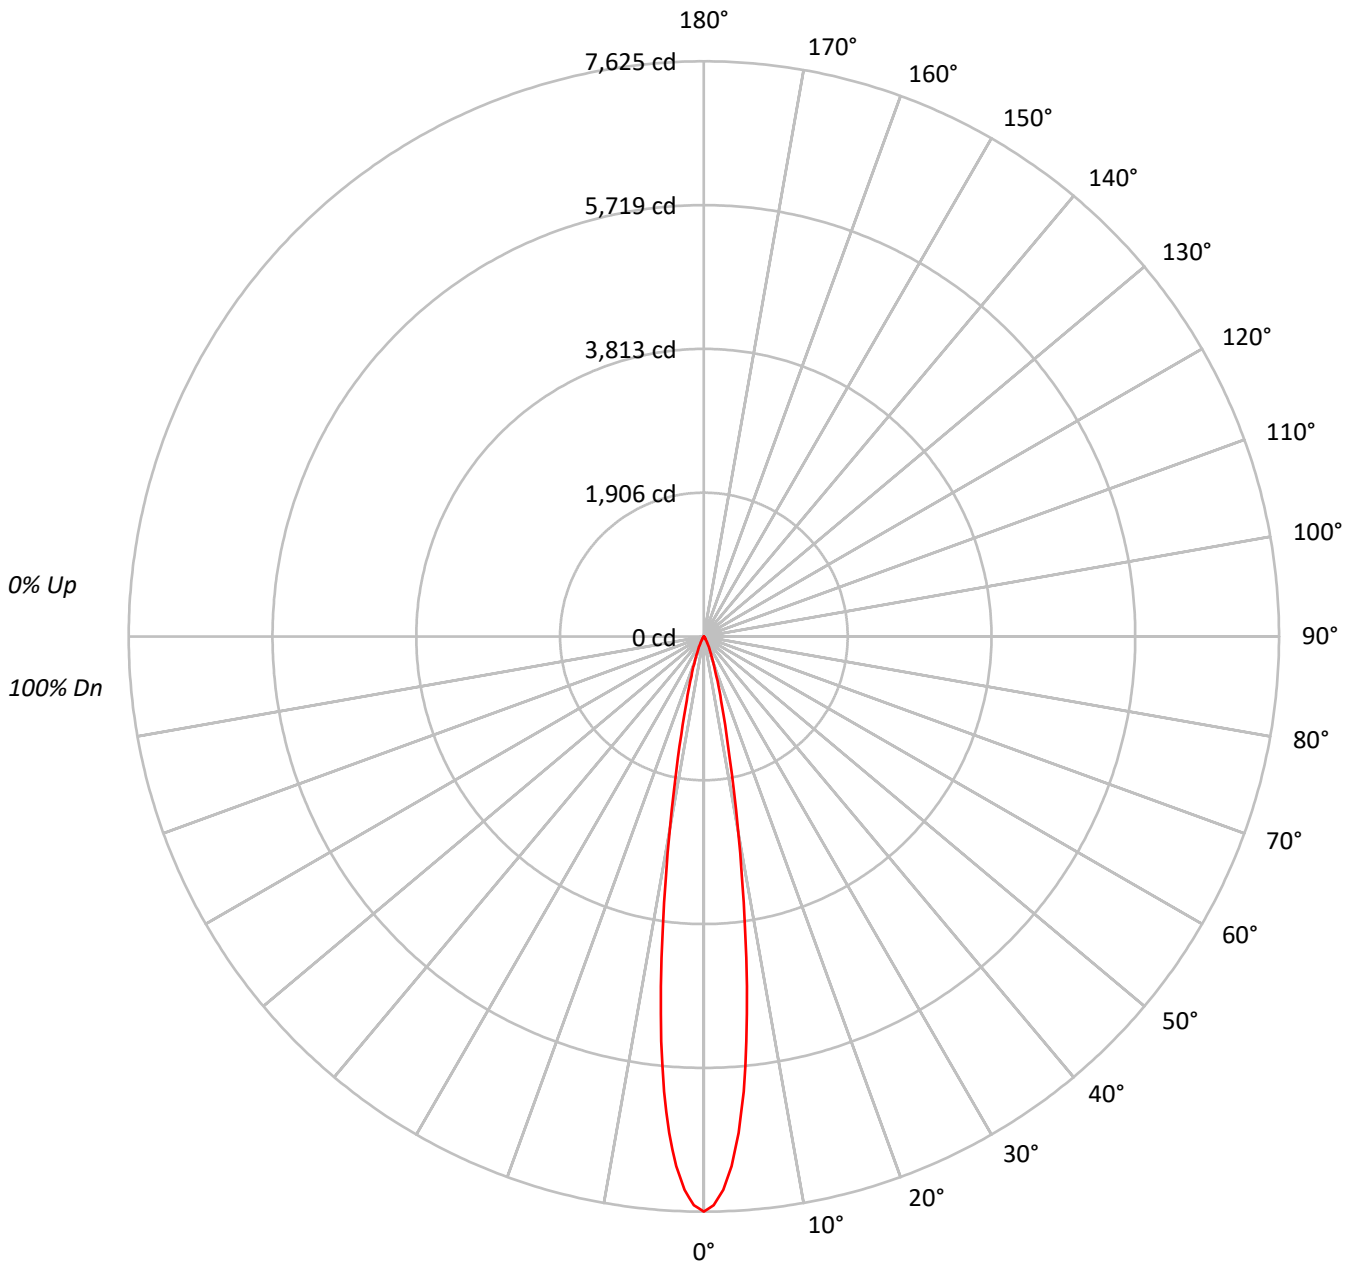



TEST NUMBER: P277894

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98	97	96	95	94	93	92	91	90	89	88																		
2	112	109	107	104	110	108	105	103	105	103	101	102	100	99	99	98	97	96	95	94	93	92	91	90	89	88	87	86																		
3	110	105	102	100	108	104	101	99	102	99	98	100	98	96	97	96	95	94	93	92	91	90	89	88	87	86	85	84																		
4	107	102	99	96	105	101	98	96	99	97	95	98	95	94	96	94	93	92	91	90	89	88	87	86	85	84	83	82																		
5	104	99	96	93	103	99	95	93	97	94	92	96	93	91	94	92	91	90	89	88	87	86	85	84	83	82	81	80																		
6	102	97	93	91	101	96	93	91	95	92	90	94	91	89	93	91	89	88	87	86	85	84	83	82	81	80	79	78																		
7	100	95	91	89	99	94	91	88	93	90	88	92	90	88	91	89	87	86	85	84	83	82	81	80	79	78	77	76																		
8	98	93	89	87	97	92	89	87	91	88	86	90	88	86	89	87	86	85	84	83	82	81	80	79	78	77	76	75																		
9	96	91	87	85	95	90	87	85	90	87	85	89	86	84	88	86	84	83	82	81	80	79	78	77	76	75	74	73																		
10	94	89	86	83	94	89	85	83	88	85	83	87	85	83	87	85	83	82	81	80	79	78	77	76	75	74	73	72																		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3761686
5°	2999063
10°	1302028
15°	449831
20°	184441
25°	83288
30°	33497
35°	15599
40°	8501
45°	3140
50°	1919
55°	1376
60°	789
65°	467
70°	577
75°	0
80°	0
85°	0



TEST NUMBER: P277894

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	457.7	55.0
10°-20°	274.9	33.0
20°-30°	75.7	9.1
30°-40°	18.0	2.2
40°-50°	4.4	0.5
50°-60°	1.5	0.2
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	808.2	97.1
0°-40°	826.2	99.2
0°-60°	832.0	99.9
0°-90°	832.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	832.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7625	
5°	6056	458
15°	881	275
25°	153	76
35°	26	18
45°	4	4
55°	2	1
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P277894

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	7624.6
1°	7540.3
2°	7338.3
3°	7030.2
4°	6595.4
5°	6055.7
6°	5396.7
7°	4674.7
8°	3916.2
9°	3218.5
10°	2599.0
11°	2074.5
12°	1651.2
13°	1331.6
14°	1077.4
15°	880.7
17.5°	546.7
20°	351.3
22.5°	230.4
25°	153.0
27.5°	98.3
30°	58.8
32.5°	37.0
35°	25.9
37.5°	18.9
40°	13.2
42.5°	7.8
45°	4.5
47.5°	3.3
50°	2.5
52.5°	2.1
55°	1.6
57.5°	1.2
60°	0.8
62.5°	0.8
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P277894

CATALOG NUMBER: LDA2B058050D010 EU2B05SP158050 2LBAD1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)