

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P492833

Luminaire Tested: **LDA2B059024R65D010 2LBDLC1MW**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P492833  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-68)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B059024R65D010 2LBDLC1MW  
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2400K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 565.0 lumens  
Efficiency: N/A  
Efficacy: 80.7 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.94  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P492833

CATALOG NUMBER: LDA2B059024R65D010 2LBDLC1MW

### Luminous Intensity Polar Plot

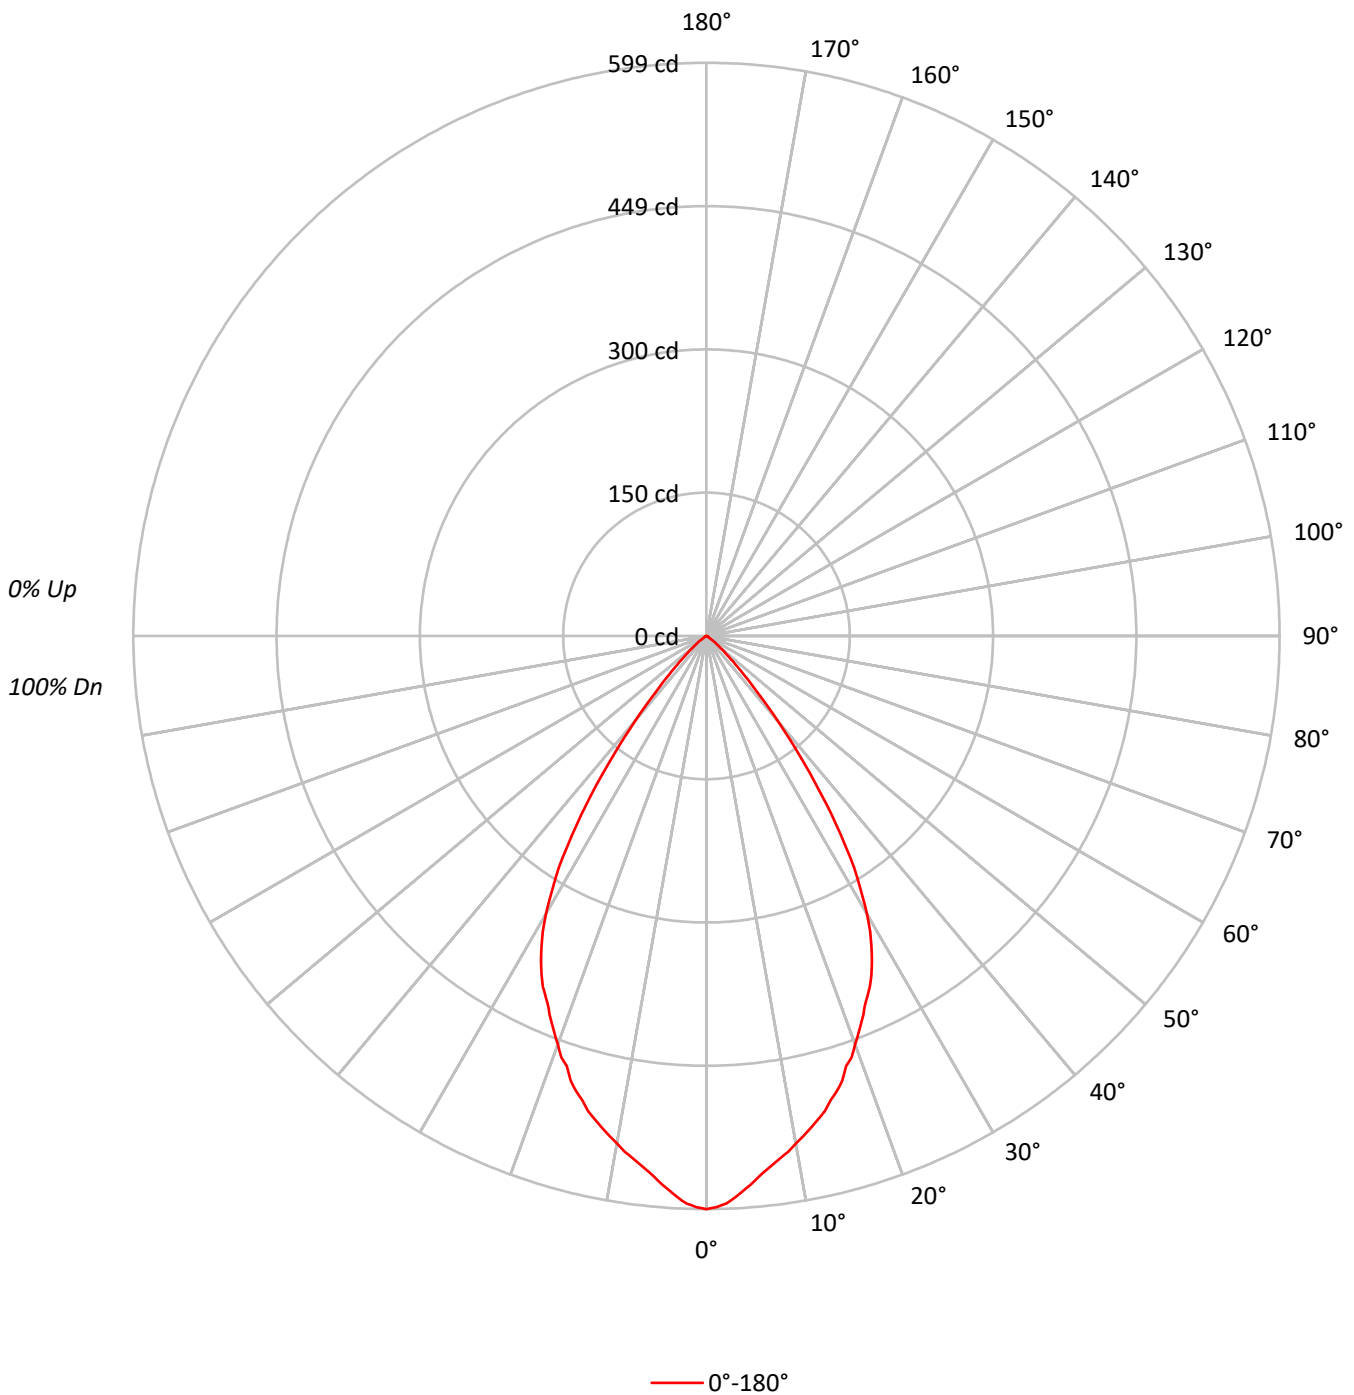



TEST NUMBER: P492833

CATALOG NUMBER: LDA2B059024R65D010 2LBDLC1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92		95	92	90		92	90	88	87
3	102	96	90	86	100	94	89	86	91	88	84		89	86	83		87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82	78	76	74
5	92	83	77	73	90	82	76	72	80	75	72		79	74	71		77	73	70	69
6	87	78	72	67	85	77	71	67	75	70	66		74	69	66		73	69	65	64
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68	64	61	60
8	78	68	62	58	77	68	62	58	67	61	58		66	61	57		65	60	57	56
9	74	64	58	54	73	64	58	54	63	58	54		62	57	54		61	57	53	52
10	71	61	55	51	70	60	54	51	59	54	50		59	54	50		58	53	50	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	295573
5°	283281
10°	269774
15°	256353
20°	238466
25°	220141
30°	191015
35°	137080
40°	74451
45°	31816
50°	13662
55°	4903
60°	888
65°	700
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P492833

CATALOG NUMBER: LDA2B059024R65D010 2LBDLC1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	53.5	9.5
10°-20°	140.6	24.9
20°-30°	183.8	32.5
30°-40°	139.8	24.8
40°-50°	40.4	7.2
50°-60°	6.1	1.1
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	378.0	66.9
0°-40°	517.8	91.7
0°-60°	564.3	99.9
0°-90°	565.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	565.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	599	
5°	572	54
15°	502	141
25°	404	184
35°	228	140
45°	46	40
55°	6	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P492833

CATALOG NUMBER: LDA2B059024R65D010 2LBDLC1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	599.1
1°	597.0
2°	593.7
3°	587.1
4°	579.8
5°	572.0
6°	564.4
7°	557.8
8°	551.4
9°	545.7
10°	538.5
11°	532.1
12°	525.5
13°	518.8
14°	511.6
15°	501.9
16°	494.7
17°	485.9
18°	472.7
19°	465.7
20°	454.2
21°	444.0
22.5°	428.3
23°	422.3
24°	412.9
25°	404.4
26°	393.3
27°	380.9
28°	367.3
29°	352.8
30°	335.3
32.5°	287.3
35°	227.6
37.5°	167.8
40°	115.6
42.5°	73.3
45°	45.6
47.5°	28.4
50°	17.8
52.5°	10.6
55°	5.7
57.5°	2.1
60°	0.9
62.5°	0.6
65°	0.6



TEST NUMBER: P492833

CATALOG NUMBER: LDA2B059024R65D010 2LBDLC1MW

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)